

New Column  
By Scott Norman

# HOT CoCo

THE MAGAZINE FOR TRS-80 COLOR COMPUTER® USERS.

GWG/I PUBLICATION  
JUNE 1985  
US \$5.00

RAE  
A. \$6.75

## Memory!

The Ultimate Upgrade

Pie Charts  
Fast, Easy,  
Effective

Gemini  
Printer  
Magic  
Create Unique  
Typography

Money!  
Invest Wisely  
Using Your CoCo

PLUS: The Latest on Communications,  
Education, and Product Developments





# A FULL LINE OF QUALITY MODEMS



## Choose an affordable Radio Shack modem that

### Open the Door to an "Electronic Village"

Adding a telephone modem to your computer takes you to the door of a new age in information transfer, to an "electronic village" where the latest news, most recent stock prices, farm futures, scholarly materials and more are always at your fingertips.

And there's never been a better time than now to use your Radio Shack® or Tandy® computer as the key to this new age. With our full line of modems, you can choose the one right for your home or business and get "on line" in a hurry.

With one of our modems and Videotex software for your computer, you can use community bulletin boards to set up an electronic "garage sale" or chat with a neighbor. Send E-Mail or join an information service to research a report, read the news and more. There are even services that let you shop without leaving your house. But whatever you decide, a Radio Shack modem is the first step.

### Save Time with Our AC-4 Acoustic Coupler

Our AC-4 Acoustic Coupler (26-1179, \$119.95) is perfect for

travellers. Just dial the telephone number you want, place the phone handset into the AC-4 and you're ready to go. It's perfect for use in a hotel room, client's office or wherever direct connection to a telephone wall jack is impractical.

The AC-4 operates at 300 baud, with full and half duplex capability and originate and answer modes.

### Save on a Sale-Priced Modem II Through May

Our Direct-Connect Modem II is a programmable, auto-answer, auto-dial modem —and it's on



# MAKES GETTING "ON LINE" EASY.



## fits your needs and never be out of touch again!

sale in May\* for just \$119.95  
(26-1173, Reg. \$199.95).

### Our Basic 300-Baud Modem is Under \$60

Our DCM-3 Direct-Connect Modem (26-1178, \$59.95) makes data transfer especially affordable for the home computer user. It plugs into a modular jack for full duplex capability.

### Our High-Speed Modem Is Value Packed

Finally, a full-featured 1200-baud modem that's value priced. Move up to 1200-baud transmissions and save money on long

distance phone bills and information service connect time every time you use the DC-2212.

The DC-2212 (26-1176, \$399.95) dials and answers the telephone, receives and transmits information and hangs up when the call is completed.

The DC-2212 is a direct-connect modem for Bell 212A-compatible synchronous or asynchronous operation.

### See Them Today

Stop by your nearby Radio Shack Computer Center, participating store or dealer for a first-hand look at our modems.

Circle Reader Service card #4

**Radio Shack®**  
**The Technology Store™**  
A DIVISION OF TANDY CORPORATION

### Send Me a Free Copy of Your 1985 Computer Catalog.

Mail To: Radio Shack, Dept. 85-A-339  
300 One Tandy Center, Fort Worth, Texas 76102

Name

Address


City

State  Zip

Telephone

\*Sale begins May 1, ends May 31, 1985. Prices apply at Radio Shack Computer Centers and at participating Radio Shack stores and dealers. All modems FCC registered. Use modems only with Bell-compatible equipment. Direct-connect modems are not for multi-line use without optional extra controller.



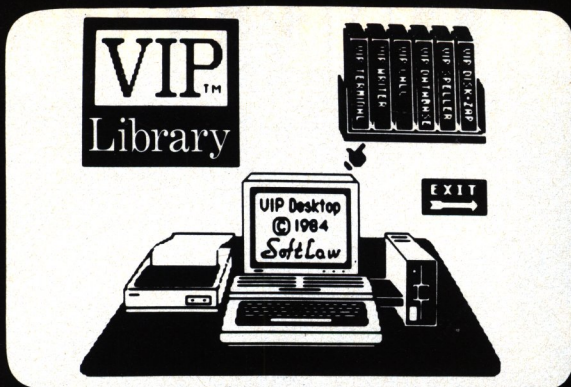

# VIP Integrated Library™

## VIP Desktop Magic!

Finally, you can have the power and integration of Lotus Symphony™, 1 2 3™ or Open Access™ for the larger micros on your Color Computer! The convenience of instant changes to a new application and effortless transfer of files is at the tip of your finger.

With VIP Desktop, the six applications of VIP Library are integrated into one program, on one disk. You have instant access to word processing, with a spelling checker always in attendance, data management with mail merge, spreadsheet financial analysis, telecommunications and disk maintenance. Just move the hand to point to the volume, and the new application is there. And VIP Integrated Library has been made to work well with one disk drive, or all four, so be ready to push your Color Computer to the limits!

## Elegance!

VIP Integrated Library is a product with finesse, inside and out. Inside is one awesome but very elegant program. On the outside, it comes handsomely bound in two cloth covered, gold embossed binders with slipcases - like those you get with software for the Tandy 2000™. And remember, to get software of this quality for the Tandy 2000 you would have to pay hundreds more!

## Stand-Alone Power

VIP Integrated Library is not one of those slipshod, all-in-one slicer-dicer machines, good for one day and then you throw it away. It fully integrates the six top-of-the-line stand-alone programs described in the following pages: VIP Writer, VIP Speller, VIP Calc, VIP Database, VIP Terminal & VIP Disk-Zap. You can buy the entire Integrated Library at once, or you can buy one or two programs that you need now and upgrade to the integrated Library later.†

## Shared Files, Shared Features

All VIP Integrated Library applications share common features, such as ease of use, built-in help, the same commands, full printer control, full use of your 64K of memory, and step-by-step tutorials. Most important, all essential applications feature professional high resolution lowercase displays to give you a choice of 51, 64, or 85 characters per line, with 21 or 24 lines per screen. You get a professional display on your Color Computer without any hardware modification!

**Buy the Integrated Library for**

**\$149.95**

Radio Shack Catalog No. 90-0213

Or buy the individual volumes separately, as shown on the following pages!†

Requires 64K and one or more disk drives.

VIP Integrated Library comes on one disk. Tape versions of programs are not supplied.

†Those already owning one VIP product, except for VIP Speller, may purchase the Integrated Library by sending in the VIP program with a check or money order for \$99.95. This upgrade offer is limited to one Library per person; credit will ONLY be given for one VIP program, regardless of how many are owned. This upgrade offer is available ONLY through SoftLaw, and not through Radio Shack stores or dealers. Be sure to include \$6.00 for shipping & handling.

# VIP Writer

RATED TOPS IN RAINBOW

COLOR COMPUTER MAGAZINE & COMPUTER USER

Including  
VIP Speller  
at no  
additional  
cost!

The most powerful and easy-to-use word processor is available in the showpiece and workhorse of the Library: The VIP Writer™.

The result of two years of research, the VIP Writer™ offer every feature you could desire from a word processor. It is the most powerful, fastest, most dependable and most versatile. With the hi-res display, workspace and compatibility features built into the Library the Writer is also the most usable.

"... Nearly every feature and option possible to implement on the Color Computer. The design of the program is excellent; the programming is flawless. October 1983 "Rainbow"

Among word processors for the CoCo, VIP Writer stands alone as the most versatile most professional program available." May 1984 "Computer User"

The Writer will work with you and your printer to do things you always wanted to do. Every feature of your printer can be put to use, every character set, every graphics capability at any baud rate, EVEN PROPORTIONAL SPACING. All this with simplicity and elegance.


## Professional features of particular note:

- Memory-Sense with **BANK SWITCHING** to fully utilize 64K, giving not just 24 or 30K, but up to 53K of workspace with the tape version and 50K with the disk version.
- **TRUE FORMAT WINDOW** allowing you to preview the printed page ON THE SCREEN BEFORE PRINTING, showing centered lines, headers, FOOTNOTES, page breaks, page numbers, & margins in line lengths of up to 240 characters. It makes HYPHENATION a snap.
- A **TRUE EDITING WINDOW** in all 9 display modes for those extra wide reports and graphs (up to 240 columns!).
- **FREEDOM** to imbed any number of **PRINTER CONTROL CODES** anywhere, **EVEN JUSTIFIED TEXT**.
- Full 4-way cursor control, sophisticated edit commands, the ability to edit any BASIC program or ASCII textfile, **SEVEN DELETE FUNCTIONS**, **LINE INSERT, LOCATE AND CHANGE**, wild card locate, up to **TEN SIMULTANEOUS** block manipulations, word wrap around, programmable tabs, display memory used and left, non-breakable space, and headers, footers and FOOTNOTES.
- Automatic justification, automatic pagination, automatic centering, automatic flush right, underlining, superscripts, subscripts, pause print, single-sheet pause, and print comments.
- Type-ahead, typamatic key repeat and key beep for the pros, **ERROR DETECTION** and **UNDO MISTAKE** features, 3 **PROGRAMMABLE** functions, auto column creation, and instant on-screen **HELP**.

**Radio Shack Catalog No. 90-0141**

**32K (Comes with tape & disk) \$69.95**

VIP Writer-VIP Speller Combo comes in VIP Writer Binder.

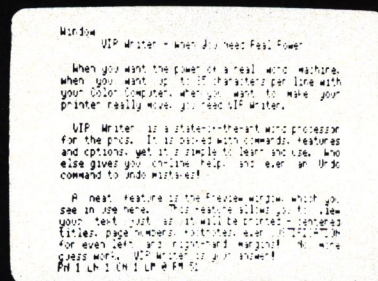

# VIP Speller™

VIP Speller™ is the fastest and most user-friendly speller for your CoCo. It can be used to correct any ASCII file—including VIP Library™ files and files from **Scriptit™** and **Telewriter™**. It automatically checks files for words to be corrected, marked for special attention or even added to the dictionary. You can even view the word in context, with upper and lowercase. VIP Speller™ comes with a specially edited 50,000 word dictionary, and words can be added to or deleted from the dictionary or you can create one of your own.

Radio Shack Catalog No. 90-0142

**32K DISK ONLY \$49.95**

Radio Shack is a registered trademark of Tandy Corp. Tandy 2000 is a trademark of Tandy Corp.

Symphony and 1 2 3 are trademarks of Lotus Development Corp. Open Access is a trademark of Software Products International.

VIP Programs do not work with JDOS



# VIP Database™

"ONE OF THE BEST" JULY 1984 "RAINBOW"


This high speed MACHINE LANGUAGE program fills all your information management needs, be they for your business or home. And it does so better than any other database program for the Color Computer, featuring machine code, lowercase screens and mail-merge capabilities. Inventory, accounts, mailing lists, family histories, you name it, **VIP Database™** will keep track of all your data, and it will merge **VIP Writer™** files.

The **VIP Database™** features selectable lowercase displays for maximum utility. It will handle as many records as fit on your disks. It is structured in a simple and easy to understand menu system with full prompting for easy operation. Your data is stored in records of your own design. All files are fully indexed for speed and efficiency. Full sort of records is provided for easy listing of names, figures, addresses, etc., in ascending or descending alphabetic or numerical order. Records can be searched for specific entries, using multiple search criteria. With database form merge you may also combine files, sort and print mailing lists, print "boiler plate" documents, address envelopes - the list is endless. The math package even performs arithmetic operations and updates other fields. Unlimited print format and report generation with the ability to imbed control codes for use with all printers.

Radio Shack Catalog No. 90-0140

32K DISK \$59.95

64K Required for math package & mail merge

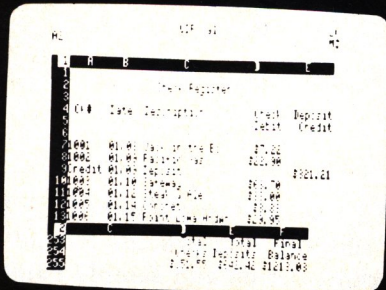

# VIP Calc™

"MORE USABLE FEATURES" FEB 1985 "RAINBOW"

**VIP Calc™** is truly the finest and easily the most powerful electronic worksheet and financial modeling program available for the Color Computer. Now every Color Computer owner has access to a calculating and planning tool better than VisiCalc™, containing all its features and commands and then some, WITH USABLE DISPLAYS.

There's nothing left out of **VIP Calc™**. Every feature you've come to rely on with VisiCalc™ is there, and then some. You get up to **5 TIMES** the screen display area of other spreadsheets for the Color Computer and Memory-Sense with **BANK SWITCHING** to give not just 24, or 30, but **UP TO 33K of WORKSPACE IN 64K!!!** This display and memory allow you the FULL SIZE, USABLE WORKSHEETS you require. You also get: User definable worksheet size, up to 512 columns by 1024 rows! \* Up to **SIXTEEN VIDEO DISPLAY WINDOWS** to compare and contrast results of changes \* **16 DIGIT PRECISION** \* Sine, Cosine and other trigonometric functions, Averaging, Exponents, Algebraic functions. Column and Row Ascending and Descending **SORTS** for comparison of results \* **LOCATE FORMULAS OR TITLES IN CELLS** \* Easy entry, replication and block moving of frames \* Global or Local column width control up to 78 characters per cell \* Create titles of up to 255 characters per Cell \* Limitless programmable functions \* Typematic Key Repeat \* Key Beep \* Typehead \* Print up to 255 column worksheet \* Prints at any baud rate from 110 to 9600 \* Print formats savable along with worksheet \* Enter **PRINTER CONTROL CODES** for customized printing with letter quality or dot matrix printer \* Combine spreadsheet tables with **VIP Writer™** documents to create ledgers, projections, statistical and financial reports and budgets.

Radio Shack Catalog No. 90-0143

64K (Comes with tape & disk) \$69.95

VIP Programs do not work with JDOS

# VIP Terminal™

RATED BEST IN JANUARY 1984 "RAINBOW"

For your important communication needs you've got to go beyond software that only lets you chat. You need a smart terminal so that you can send and receive programs, messages, even other **VIP Library™** files. **VIP Terminal™** has "more features than communications software for CP/M, IBM and CP/M 86 computers." Herb Friedman, Radio Electronics, February 1984.

**FEATURES:** Choice of 8 hi-res lowercase displays \* Memory-Sense with **BANK SWITCHING** for full use of workspace \* Selectively print data at baud rates from 110 to 9600 \* Full 128 character ASCII keyboard \* Automatic graphic mode \* Word mode (word wrap) for unbroken words \* Send and receive **Library** files, Machine Language & BASIC programs. Duplex: Half/Full/Echo, Word length: 7 or 8, Parity: Odd/Even or None, Stop Bits: 1-9 \* Local linefeeds to screen \* Save and load ASCII files, Machine Code & BASIC programs \* Lowercase masking \* 10 Keystroke Multiplier (MACRO) buffers to perform repetitive pre-entry log-on tasks and send short messages \* Programmable prompt or delay for send next line \* Selectable character trapping \* Send up to ten short messages (KSMs), each up to 255 characters long, automatically, to save money when calling long distance. Recommended baud rates are 110 and 300.

Radio Shack Catalog No. 90-0139

32K (Comes with tape & disk) \$49.95

(Tape works in 16K but without hi-res displays)

# VIP Disk-ZAP™

RAVED ABOUT IN THE APRIL 1983 "RAINBOW!"

Your database file disk, form letter disk, or BASIC program disk goes bad. An I/O error stops loading, or even backing up of the disk. Weeks, even months of work sit on the disk, irretrievable. Now catastrophic disk errors are repairable, quickly and with confidence, using the **VIP Disk-ZAP™**. It is the ultimate repair utility for simple and quick repair of all disk errors. Designed with the non-programmer in mind, the **VIP Disk-ZAP™** will let you retrieve all types of bashed files, BASIC and Machine Code programs. The 50 page tutorial makes the novice and expert.

Radio Shack Catalog No. 90-0144

16K DISK \$49.95

Available By Express Order

At

**Radio Shack®**

Ask to see the demonstration diskette.



To Order Direct Call:

1-800-328-2737



Order Status and Software Questions call (805) 968-4364

**MAIL ORDER:** \$3.00 U.S. Shipping per product (the library is two products). (\$6.00 CANADA; \$20.00 OVERSEAS). Personal checks allow 3 weeks.

All prices subject to change without notice.



132 Aero Camino  
Goleta,  
California 93117


Circle Reader Service card #212

TRS-80 is a trademark of Tandy Corp. VisiCalc is a trademark of VisiCorp.

©1985 by Softlaw Corporation



# Volume Price Breakthrough!!

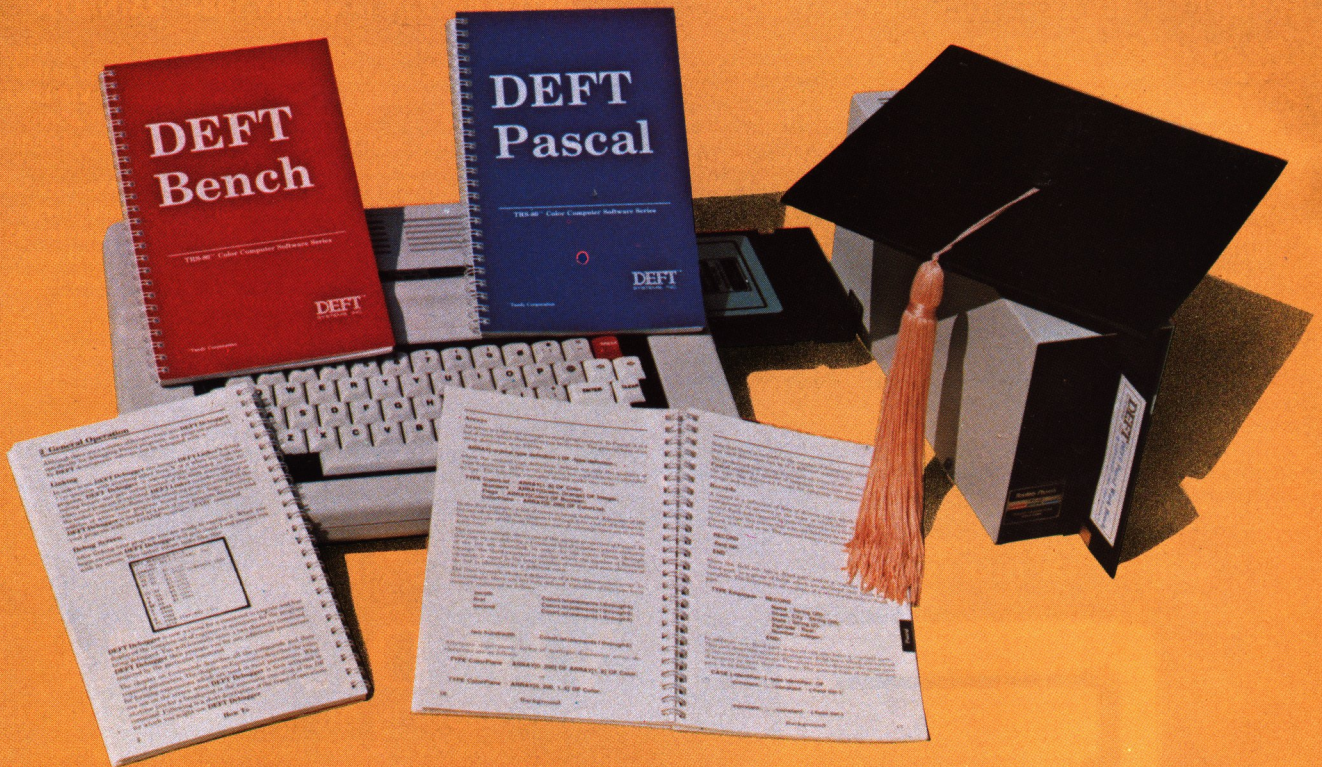

New! **DEFT Extra**, the perfect addition to your **DEFT Pascal** or **DEFT Pascal Workbench**. **DEFT Extra** is a library of gaming and direct file I/O routines as well as graphics routines that provide Extended Basic's graphics capabilities in all 8 graphics modes. Full **DEFT** quality documentation and sample Paint program included. Only \$39.95 (requires 64K)

**DEFT Bench** ~~\$49.95~~ **\$39.95**

#### DEFT Edit

Full screen editor

#### DEFT Linker

(see **DEFT Pascal**)

#### DEFT Lib

create and maintain  
program object libraries

R.S. Cat. #90-5001

#### DEFT Debugger

debug Pascal machine  
programs **symbolically**

#### DEFT Macro/6809

supports entire 6809  
instruction set,  
lets you define your own  
instructions

**DEFT Pascal** ~~\$79.95~~ **\$59.95**

#### DEFT Pascal Compiler

complete **Pascal** language,  
generates machine  
language object

#### DEFT Linker

combines multiple program  
objects into one binary  
program

R.S. Cat. #90-5000

**\$89.95**

#### DEFT Pascal Workbench ~~\$119.95~~

(**DEFT Pascal** And **DEFT Bench** Together)

R.S. Cat. #90-5002

All **DEFT** software and programs developed with **DEFT** software are BASIC ROM independent and **use all** of the **memory** in your Color Computer **without OS-9**. All you need is **DEFT** software and a Tandy Color Computer with Extended Disk BASIC, at least 32K of RAM and One Disk Drive. With **DEFT Pascal** (\$59.95) you will also need a text editor to write your programs. **PBJ WORD-PAK** compatible upgrades and Educational discounts available. Dealer inquiries welcome.

**DEFT**<sup>TM</sup>  
SYSTEMS, INC.

**Now Available  
By Express Order  
At Your Local  
Radio Shack Store!**

Orders and Sales Information 1-800-992-DEFT

Technical Assistance 1-301-253-1300

Now Available in Canadian Radio Shack Stores!

Circle Reader Service card #243

Quantity of Each: — **DEFT Pascal** — **DEFT Bench**  
— **DEFT Extra** — **DEFT Pascal Workbench**

Method of Payment (check one) ☐ Check Enclosed  
☐ VISA ☐ Master Card ☐ COD

Account Number

Card Expiration Date  /

Signature

Name



Street

City  State  Zip

All orders are shipped UPS within 24 hours of receipt. Add 4% for shipping and handling; Maryland residents add 5% for State Sales Tax; add \$2.00 for COD. **DEFT** is a Trademark of DEFT Systems, Inc.

**DEFT Systems, Inc.**  
Suite 4, Damascus Centre  
Damascus, MD 20872



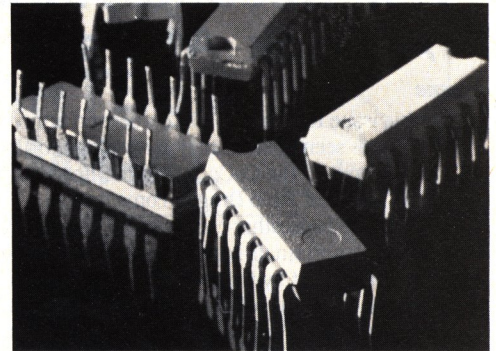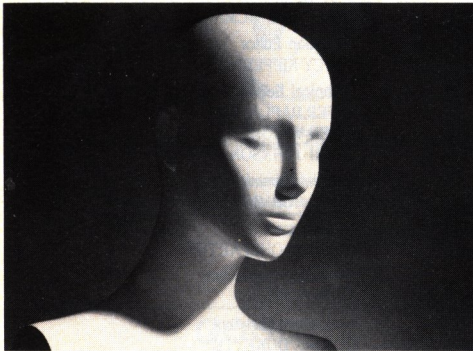

Cover photo by Ed Judice

## ARTICLES

- 40 64K Modification Revisited**, *Richard E. Esposito and Raymond W. Rowe*

Everything you need to know about memory upgrades.

- 44 Missile Defense**, *Jim McDowell and Shawn Diehl*  
Protect your cities from destruction.

- 45 HOT CoCo's Pull-Out Program Listings**

- 57 The 80K Color Computer**, *Henry C. Grace*  
Maximize memory use through bank switching.

- 59 Pie In The Sky**, *Terry Riegel*  
Create simple pie charts.

- 62 Investment Analysis**, *Dev Chakravarty*  
Project the outcome of your investments.

- 66 Fabulous Fonts**, *Peter H. Stoloff*  
Generate custom typography.

- 70 How Your CoCo Adds Up**, *Frank Tipps*  
It's all binary.

## DEPARTMENTS

- 6 Digressions**, *Michael E. Nadeau*  
Happy Anniversary to us.
- 8 Instant CoCo Directory**
- 10 How To Use HOT CoCo**
- 12 Letters To The Editor**
- 18 Doctor ASCII**, *Richard E. Esposito and Ralph E. Ramhoff*
- 22 Mindbusters**, *Richard Ramella*  
The Fifteen Puzzle.
- 24 NEW! The Computer Room**, *Scott L. Norman*  
Not all database managers are the same.
- 30 Feature Review: In Search Of 128K**, *Scott L. Norman*  
Two 128K upgrades compared.
- 33 Reviews**, *edited by J. Scot Finnie*  
Zookey, Sidewise, Edittron, Dual DOS Switcher, and more.

- 78 6809 On Line**, *Bobby Ballard*  
A fix for Videotex.
- 79 Assembly 101**, *Victor and James Perotti*  
What's in a program?
- 81 Reader's Forum**
- 84 The Learning Page**, *Nancy Kipperman*  
The computer literacy problem.
- 88 Product News**, *J. Scot Finnie*  
Computer Systems Distributors, Creative Technical Consultants, TCE, Saguaro Software, Tandy, Vidtron, and more.
- 89 Index To Advertisers**
- 89 Coming Next Month**
- 91 CoCo For Hire**, *Terry Kepner and Linda Tiernan*
- 96 The Corner Office**, *Jeff DeTray*  
The survey results are in.

HOT CoCo (ISSN 0740-3186) is published monthly by CW Communications, 80 Pine St., Peterborough, NH and additional mailing offices. Subscription rates in U.S. are \$24.97 for one year, \$38 for two years, and \$53 for three years. In Canada and Mexico, \$27.97—one year only, U.S. funds. Second class postage paid at Peterborough, NH and additional mailing offices. Canadian 2nd Class mail reg. #9564. Nationally distributed by International Circulation Distributors. Foreign subscriptions (surface mail), \$44.97—one year only, U.S. funds drawn on a U.S. bank. Foreign subscriptions (air mail), please inquire. In South Africa contact HOT CoCo, P.O. Box 782815, Sandton, South Africa 2146. All subscription correspondence should be addressed to HOT CoCo, Subscription Department, P.O. Box 975, Farmingdale, NY 11737. Please include your address label with any correspondence. Postmaster: Send address changes to HOT CoCo, Subscription Services, P.O. Box 975, Farmingdale, NY 11737. Send Canadian change of address to HOT CoCo, P.O. Box 1051, Fort Erie, Ontario Canada, L2A5N8. Return postage guaranteed. Entire contents copyright 1985 by CW Communications/Peterborough, Inc.. For questions concerning your subscription and to place subscription orders, please call us toll free at 1-800-645-9559 between 9 a.m. and 5 p.m. or write to HOT CoCo, Subscription Department, P.O. Box 975, Farmingdale, NY 11737.



## Our Second Anniversary, And A Look At Past And Present

**T**his issue marks *HOT CoCo*'s second anniversary. It's been an exciting two years. We've seen several major revisions to the Color Computer, including the 64K Color Computer, the CoCo 2, and the Korean-built models. We've also seen the TDP-100, MC-10, and Tano Dragon come and go.

There have been other comings and goings in those two years, as well. Software companies, large and small, have folded or pulled out of the CoCo market. But the lost support is more than offset by the greater number of new companies catering to CoCo users.

I started to count all the CoCo products available two years ago to compare that number with what was on the market now. It was a futile attempt. There are thousands of products available in an unbelievably wide range of applications. Funny how the general computer press says little of this.

Another thing you hear about in the general-interest computer magazines is the number of them that have folded—enough to make more than a few readers and advertisers nervous. The reason for this is focus; the whole personal-computer phenomenon is too big to cover in one magazine in more than the most general way. Only one of these magazines has a regular feature dedicated to Tandy computers, and not just the Color Computer at that.

System-specific magazines, such as *HOT CoCo*, are better positioned to give the readers what they need—the nuts and bolts about *their* computer. We think we have a pretty good future. But what does the future hold?

### The Future

The two "big things" that need changing are the Color Computer's screen display and memory capacity. At least a 64-character-wide screen with true upper- and lower-case is necessary for serious word processing or spreadsheet use; 80 characters are preferred. Not long ago, 64K was the standard memory capacity on home computers. Now it is 128K, and it doesn't look like it will stay there long.

There are products that fix these problems, and we see these products gaining in importance to CoCo owners. Soon, the typical full-blown CoCo system will include the 128K upgrade, a monitor and driver, an 80-column card, Multi-Pak Interface, a bit-graphics printer, and at least one disk drive. Many software vendors will adapt their programs to take advantage of this setup.

What will the next version of the CoCo be like? We don't know; the folks at Fort Worth are very secretive about that sort of thing. We can guess that it will have at least true upper- and lower-case, address more memory, and make use of the OS-9 operating system. OS-9 is important because it can maximize on the extra memory, especially if bank switching is involved, and can be used as a means to maintain compatibility with older machines should a major change in board design be necessary.

We will cover OS-9 from a "working man's" point of view; i.e., we'll concentrate on using its utilities to manipulate files, economize on memory, and create macros. We'll also discuss other avenues that OS-9 opens for you, such as using non-Basic programming languages.

Education will become increasingly important as Tandy continues to push the CoCo to schools and the family. We see exciting new developments in educational software in the near future. Educators and parents are just starting to learn the most effective use of the computer as a teaching aid, and you can expect *HOT CoCo* to relate the latest discoveries to you.

My space is short, so I'll conclude with a promise that *HOT CoCo* will continue to provide the best programs and the best product evaluations available in any magazine. Here's to the next two years.—Michael E. Nadeau

*HOT CoCo* is a member of the CW Communications/Inc. group, the world's largest publisher of computer-related information. The group publishes 52 computer publications in 19 major countries. Members of the group include: Argentina's *Computerworld/Argentina*; Australia's *Australia Computerworld*, *Australian Micro Computer Magazine*, *Australian PC World* and *Directories*; Brazil's *DataNews* and *MicroMundo*; China's *China Computerworld*; Denmark's *Computerworld/Danmark* and *MicroVerden*; Finland's *Mikro*; France's *Le Monde Informatique*, *Golden* (Apple) and *OPC* (IBM); Germany's *Computerwoche*, *Microcomputerwelt*, *PC Welt*, *Software Markt*, *CW Edition/Seminar*, *Computer Business* and *Commodore Magazine*; Italy's *Computerworld Italia*; Japan's *Computerworld Japan* and *Perso ComWorld*; Mexico's *Computerworld/Mexico* and *CompuMundo*; Netherlands' *CW Benelux* and *MicroInfo*; Norway's *Computerworld Norge* and *MikroData*; Saudi Arabia's *Saudi Computerworld*; Singapore's *The Asian Computerworld*; Spain's *Computerworld/Espana* and *MicroSistemas*; Sweden's *Computer-Sweden*, *MikroDatorn* and *Min Hemdator*; the UK's *Computer Management* and *Computer Business Europe*; United States: *Computerworld*, *HOT CoCo*, *inCider*, *InfoWorld*, *MacWorld*, *Micro MarketWorld*, *PC World*, *PC Jr. World*, *RUN*, *73 Magazine*, and *80 Mikro*.

**Publisher**  
JEFF DETRAY  
**Editor-in-Chief**  
MICHAEL E. NADEAU  
**Managing Editor**  
MARK E. REYNOLDS  
**Review/New Products Editor**  
J. SCOT FINNIE  
**Copy Editor**  
MARILYN G. MCMASTER  
**Education Editor**  
NANCY KIPPERMAN  
**Technical Editors**  
PETER PAPLASKAS,  
GUIER WRIGHT,  
KEITH JOHNSON (INSTANT COCO)  
**Editorial Administration**  
KIM MCCORMICK  
**Art Director**  
DONNA WOHLFARTH  
**Production Supervisor**  
ANNE FLEMING  
**Production Assistant**  
SANDRA DUKETTE  
**Advertising Director**  
PETER MONTROSS  
**Advertising Coordinator**  
SUSAN WRIGHT  
80 Pine Street  
Peterborough, NH 03458  
1-800-441-4403 or  
1-603-924-9471  
**Manufacturing Manager:**  
SUSAN GROSS  
**Typesetting Manager:**  
DENNIS CHRISTENSEN  
**Film Preparation Manager:**  
ROBERT M. VILLENEUVE  
**Darkroom Manager:**  
NATHANIEL HAYNES  
**Chairman of the Board**  
JAMES. S. POVEC  
**President/General Manager**  
DEBRA WETHERBEE  
**Vice President/Finance**  
ROGER MURPHY  
**Assistant to President/GM**  
MATT SMITH  
**Assistant to Vice President/Finance**  
DOMINIQUE SMITH  
**Executive Creative Director**  
CHRISTINE DESTREMPES  
**Director of Circulation**  
WILLIAM P. HOWARD  
**Assistant Circulation Manager**  
FRANK S. SMITH  
**Direct & Newsstand Sales Manager**  
RAINO WIREIN: 1-800-343-0728  
**Director of Credit, Sales, and Collection**  
WILLIAM M. BOYER  
**Founder**  
WAYNE GREEN

**Article submissions** from our readers are welcomed and encouraged. Inquiries should be addressed to: *HOT CoCo* Submissions Editor, 80 Pine Street, Peterborough, NH 03458. Include an SASE for a copy of our writer's guidelines. Payment for accepted articles is made at a rate of approximately \$50 per printed page; all rights are purchased. Authors of reviews should contact the *HOT CoCo* Review Editor, 80 Pine Street, Peterborough, NH 03458.

**Problems with Subscriptions:** Send a description of the problem and your current and/or most recent address to: *HOT CoCo*, Subscription Department, P.O. Box 975, Farmingdale, NY 11737.


**Change of Address:** Send old label or copy of old address and new address to: *HOT CoCo*, P.O. Box 975, Farmingdale, NY 11737. Please give eight weeks advance notice.

**Dealers:** Contact Ginnie Boudrieau, Bulk Sales Manager, *HOT CoCo*, 80 Pine Street, Peterborough, NH 03458. (800) 343-0728.

**Problems with Advertisers:** Send a description of the problem and your current address to: Magazine, Rt. 101 & Elm Street, Peterborough, NH 03458. ATTN.: Rita B. Rivard, Customer Service Manager. If urgent, call 1-800-441-4403.



**TOP RATINGS**  
**HOT COCO MAGAZINE**  
SEPTEMBER 1984

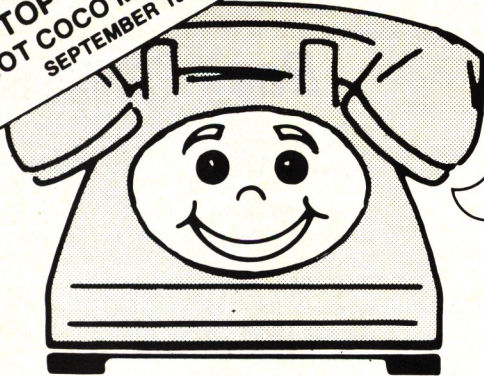

## YOU COULD FALL IN LOVE WITH **AUTOTERM!**

IT TURNS YOUR COLOR COMPUTER INTO THE

## **WORLD'S SMARTEST TERMINAL**

AND  
MOST  
LOVABLE

### **GOOD LOOKIN'**

AUTOTERM shows true upper/lower case in screen widths of 32, 40, 42, 51, or 64 characters with no split words. The width of 32 has extra large letters. Scrolling is forward, backward, and fast. Block graphics pictures are displayed automatically and can be scrolled.

The screen's top line shows operating mode, unused memory size, memory on/off, and caps-lock on/off. It also gives helpful prompts.

### **SWEET TALKIN'**

KEY-BEEP can be on/off. Unacceptable keystrokes cause a lower pitched BOP! This ERROR-BEEBOP can be on/off.

Talks to other computers with Full or Half Duplex; Baud Rate of 110, 150, 300, 600, 1200; Parity as even, odd, mark, space, none; 7 or 8 bit Word; any Stop Bits; all 128 ASCII characters; true line Break; XON/XOFF protocol; and optional line-at-a-time transmission. Able to send and receive text, block graphics, BASIC and ML programs. A 64K machine holds up to 46,600 characters (34,900 in HI-RES).

DUAL PROCESSING lets you review & edit while more data is coming in.

Fully supports D.C. Hayes and other intelligent modems.

Talks to your printer with any page size, margins, line spacing, split word avoidance. Embed your printer's control sequences for boldface, underlining, etc. Narrow text can be automatically spread out.

### **You'll also use Autoterm for simple word processing and record keeping**

You can display directories, delete files, transmit directly from disk, and work with files larger than memory. Easily maintain a disk copy of an entire session.

Compatible with TELEWRITER (ASCII) & other word processors.

### **SMOOTH WALKIN'**

AUTOTERM moves smoothly and quickly between word processing and intelligent terminal action. Create text, correct your typing errors; then connect to the other computer, upload your text, download information, file it, and sign-off; then edit the received data, print it in an attractive format, and/or save it on file.

Editing is super simple with the cursor. Find strings instantly, too! Any operating parameter, such as screen width, can be altered at any time. Uncompleted commands can be cancelled.

### **PUTTY IN YOUR HANDS**

The word processor can be used to create, print, and/or save on file your personal KSMs. They let AUTOTERM act like you. For example, it can dial through your modem, sign-on, interact, perform file operations, & sign-off; an entire session without your help. KSMs can answer the phone, prompt the caller, take messages, save them, hang-up, and wait for the next call. The KSM potential is unbelievable!

**NO OTHER COMPUTER IN  
THE WORLD CAN MATCH  
YOUR COCO'S AUTOMATIC  
TERMINAL CAPABILITIES!!!**

### **WHAT THE REVIEWERS SAY**

"AUTOTERM is the Best of Class."

Graham, *RAINBOW*, 6/83

"The AUTOTERM buffer system is the most sophisticated — and one of the easiest to use..."

Banta, *HOT CoCo*, 9/84

"Almost a full featured word processor..."

Ellers, *RAINBOW*, 11/84

**RECOMMEND 32K to 64K  
Tape-to-Disk Upgrade \$23  
You Keep the Cassette**

**CASSETTE \$39.95  
DISKETTE \$49.95**  
Add \$3 shipping and handling  
MC/VISA/C.O.D.

**PXE Computing**  
11 Vicksburg Lane  
Richardson, Texas 75080  
**214/699-7273**

Circle Reader Service card #51

Please hire the mentally retarded. They are sincere, hard working and appreciative. *Thanks! Phyllis.*



Instant CoCo is a cassette tape containing the major programs from this issue of *HOT CoCo*. Its purpose is to save you the time and effort of typing long program listings into your Color Computer. You simply load the programs from the Instant CoCo tape using your cassette recorder. The instructions for operating each program are found in the corresponding *HOT CoCo* article. Both Basic and Assembly-language programs are included on the tape.

The Instant CoCo symbol appears in *HOT CoCo*'s table of contents and on the program listing for each article with a listing used on the Instant CoCo tape. As an added extra, each tape also contains a never-before-published Bonus Program, complete with instructions.

The directory below lists all programs included on this month's Instant CoCo cassette. Shown first are the name of the article with a descriptive blurb and its author, followed by the page number in this issue where the article appears. Next comes the file name of the program on cassette. Finally, there is a brief description of the Color Computer system needed to run the program.

This month's Instant CoCo cassette is available for just \$11.47, including postage and handling, from **Instant CoCo, 80 Pine St., Peterborough, NH 03458**. See our ad on p. 64 for more details.

## Instant CoCo Directory June 1985

### Side A

Article Name/Author/Description	Page #	File Name	System
Copyright Statement	---	TITLE	16K CB
Doctor ASCII/Espósito and Jackson Automatically execute machine-language programs from disk	18	PUTLDR	32/64K ECB
Mindbusters/Ramella Can you solve these three puzzles?	22	FIFTEEN BULLS CONSARN	16K ECB 16K ECB 16K CB
64K Modification Revisited/Espósito and Rowe Test your upgrade and enable your 64K of memory.	40	MEMTEST ENABLE	32/64K ECB 64K ECB
Missile Defense/McDowell and Diehl The aliens won't be so easy to stop this time.	44	DEFENSE2 DEFNSLDR	16K ECB 16K ECB
The 80K Color Computer/Grace Access your CoCo's hidden memory.	57	80K	32/64K ECB

### Side B

Pie In The Sky/Riegel Create your own pie charts.	59	PIEGRAPH	16K ECB
Investment Analysis/Chakravarty Consult your CoCo before you invest.	62	INVSTMNT	16K ECB
Fabulous Fonts For The Gemini-10X/Stoloff Generate custom character sets for this popular printer.	66	GEM-10X	16K ECB
How Your CoCo Adds Up/Tipps Learn binary and hex math.	70	BINARYOR HEXERCIS	4K CB 4K CB
6809 On Line/Ballard Give Vidtex a buffer.	78	BUFFTEXT	16K ECB

### \*\*\* BONUS PROGRAM \*\*\*

High-Resolution Character Generator/Bussell Put an alphanumeric character set on a hi-res screen.	---	GLETTER (m) DEMO CHARMOD	16K ECB 16K ECB 16K ECB
--	-----	--------------------------------	-------------------------------

CB = Color Basic, DECB = Disk Extended Color Basic, ECB = Extended Color Basic (m) = machine-language program (use CLOADM)

## Back Issues

Yes, back issues of *HOT CoCo* are available for all months. This list shows the features in each issue:

**June 1983**—The CoCo word processor; a serial-to-parallel interface project; and the adventure, Cavehunt.

**July 1983**—How to upgrade your CoCo to 64K; cure video RFI.

**August 1983**—Speech synthesis via software; get more colors; build a color monitor driver.

**September 1983**—Disk utilities; hi-res character generator.

**October 1983**—Animation techniques; ROM disassembly, part I.

**November 1983**—Nuclear submarine simulation; ROM-pack primer; banner printer.

**December 1983**—World capitals quiz program; talking spelling tutor; vocabulary-building program.

**January 1984**—Programs for the businessman and investor; ins and outs of database management.

**February 1984**—CoCo-aided circuit design; simulate Extended Basic in Color Basic; change your CoCo's vocabulary.

**March 1984**—How a disk stores information; create your own wordsearch puzzles; dental/medical bill balancer.

**April 1984**—Peripherals buyer's guide; how to shop for a disk drive; disk-fix utility; Lisp interpreter.

**May 1984**—OS-9 review; financial transactions tracker; homebrew spelling checker; CoCo Reversi game.

**June 1984**—Horse-racing and stock-market simulators.

**July 1984**—Do-it-yourself lowercase mod; variable cross-referencer; the game, Python.

**August 1984**—Basic-09 review; database manager program; graphics tutorials; hurricane tracker.

**September 1984**—Educational software buyer's guide; typing-teacher program; the CoCo as a marketing aid.

**October 1984**—A collection of sounds for your CoCo; how to make programs auto-execute; printer spooler.

**November 1984**—Personal money manager program; disk-file protection utility.

**December 1984**—Disk-drive timer; disk drive maintenance tips; full-featured text-editing program.

**January 1985**—Spreadsheet program; stock-charting program; make fancy graphics with your printer.

**February 1985**—Drawing program; user's group list; Space Hawks game.


**March 1985**—Universal screen-dump program; POKE list; utilities.

**April 1985**—Telewriter-64 mods; modem comparison; satellite-tracking program.


You'll also find in each issue our regular features, reviews of popular software and hardware, and dozens of useful programs that are yours for the typing in.

Each back issue costs \$3.50 plus \$1 shipping and handling. On orders of 10 or more back issues, there is a flat \$10 shipping fee. Send your orders to **HOT CoCo, Attn. Back Issue Orders, 80 Pine St., Peterborough, NH 03458**.



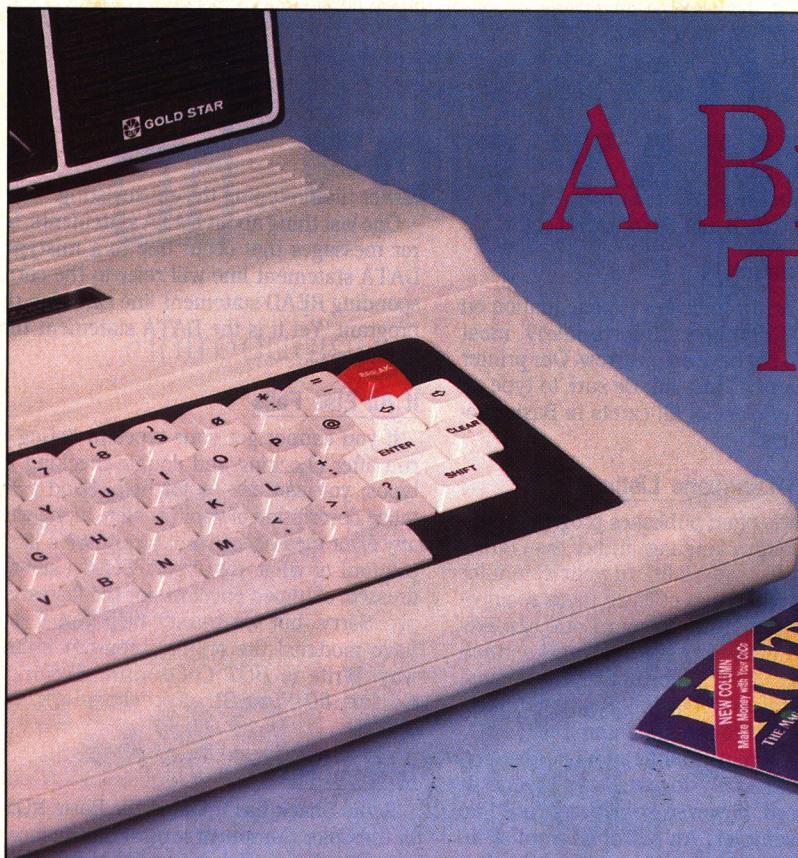

# A Brilliant Team

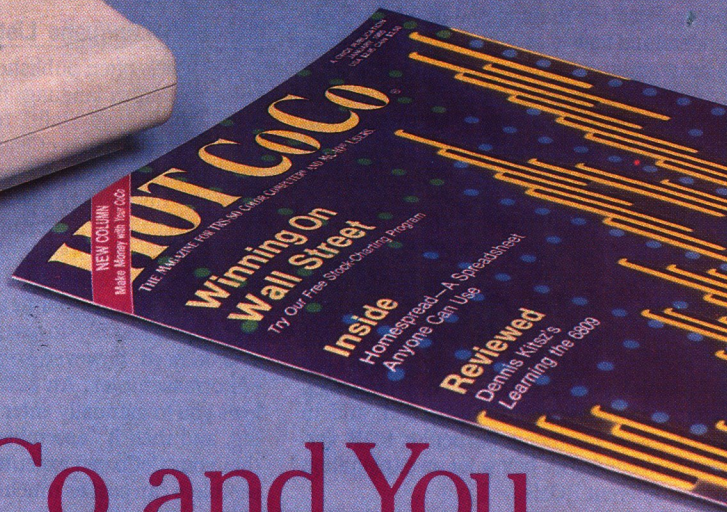

## HOT CoCo and You.

Those with the latest and most thorough information run their computers with confidence. Those without it are run ragged with frustration.

Color Computerists who've gained the upper hand read **HOT CoCo**, the monthly magazine that unlocks the full potential of TRS-80\* and MC-10\* Color Computers.

**HOT CoCo's** inside stories can make you and

☐ **YES!** I want to be part of a brilliant team...

Send me 12 issues of **HOT CoCo** for the low price of \$24.97. I'll save 30% off the newsstand price.

☐ Payment enclosed ☐ Bill me

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Canada & Mexico \$27.97, one year only, US funds drawn on US bank. Foreign surface \$44.97, one year only, US funds drawn on US bank. Foreign airmail please inquire.

Allow 6 to 8 weeks for delivery.

**HOT CoCo • PO Box 975  
Farmingdale, NY 11737**

356B4T

your Color Computer a brilliant team. By subscribing to **HOT CoCo** for the low one-year price of \$24.97, you'll get information-packed issues at 30% off the cover price!

- **HOT CoCo** specializes in presenting time-efficient, money-saving programs for business, home, and school. Easy to use, and practical!
- Novice and expert users alike will benefit from **HOT CoCo's** tips and tutorials. Sharpen your skill. Watch your CoCo become more versatile!
- Graphics? Discover how easy it is to create your own!
- Games? **HOT CoCo's** wide assortment provides hours of entertainment and challenge for the entire family.
- Looking to gain an advantage by adding more hardware or software? Read our reviews first—decide for yourself what's worth its weight in gold, and what isn't worth a hill of beans.

Everything on the pages of **HOT CoCo** can bring out the best in you and your Color Computer. A wealth of knowledge—for an entire year—for **just \$24.97!**

Order your subscription today by filling in the coupon, or by calling TOLL FREE 1-800-258-5473. In New Hampshire, call 1-924-9471.

\* TRS-80 and MC-10 Color Computers are registered trademarks of the Radio Shack Tandy Division of Tandy Corp.



Each month *HOT CoCo* provides program listings for you to type into your Color Computer and use. If you are new to computing, read this page for advice that will help you avoid problems often encountered when entering programs manually.

## Know the Basics

Before you begin, you should be familiar with the basic operation of your Color Computer. Read the manual and make sure you understand how to enter a program line, save a program to cassette or disk, and make corrections to a program line. The Color Computer manuals are well written, and you will enjoy your CoCo much more if you've read them.

## Check the Requirements

The first thing you should do is make sure that the program you want to enter will run on your version of the Color Computer. You need to know the memory requirements, the type of Basic used (Color, Micro Color, Extended Color, or Disk Extended Color Basic), what peripherals might be needed, and in some cases whether a particular ROM version is needed. (See below for an explanation of the different ROMs.)

All this information is provided in the System Requirements box included with each article that has a program listing. This box gives the minimum requirements to use the program. If, for instance, the box reads "16K RAM, Color Basic," the program should also work on 32K or higher, Extended or Disk Extended Color Basic CoCos.

Once you've established that the program will work on your CoCo, read the article thoroughly. Sometimes it will include information vital to typing in the listing.

## What You See is What You Get

We print all Basic program listings 32 characters across—just as they appear on your video screen. Type in the listings exactly as it appears in the magazine, being particularly careful with spaces and punctuation. If you do this, the 32-character format will aid in proofreading what you have typed in by letting you match beginning and ending characters on corresponding lines. If you have a line that ends on a character other than what appears in the magazine, go back and check for a typo.

## Common Errors

Some characters are easier to confuse than others when you are typing in program listings. And since your Color Computer interprets everything literally, the smallest error can crash a program. Below is a list of characters commonly confused with one another:

zero and the letter O  
colon and semicolon

lowercase l and the numeral one  
uppercase B and the numeral eight

## Weird Characters

The up arrow indicates exponentiation on the Color Computer. Unfortunately, most printers do not have an up arrow. Our printer prints a caret (^) instead. Be sure to type an up arrow in place of all carets in Basic program listings.

## Assembly-Language Listings

*HOT CoCo* often publishes programs written in Assembly language rather than Basic. Assembly listings "talk" to your computer on a much more direct level; Basic requires some translation before your CoCo can execute it. Therefore, Assembly works much faster than Basic. Unfortunately, it is more difficult to learn Assembly-language programming than Basic programming.

But you do not need to know how to program in Assembly to use these programs. You do need, however, something called an editor/assembler. An editor/assembler allows you to manually enter an Assembly listing, and then it "assembles" it into a form that your CoCo can execute. Since editor/assemblers can cost as much as \$80, you probably don't need one unless you want to learn Assembly-language programming.

It is possible to hand assemble an Assembly listing, but this is a tedious process that is best left to someone with a little experience with Assembly programming. It also requires a short Basic routine that prepares your CoCo for hand assembly.

We convert some Assembly programs to Basic DATA statements and include a short Basic routine to load and execute the DATA statements. This gives you a program that you can type in just like a Basic listing, yet it operates much like one written in Assembly.

If you want to run one of *HOT CoCo's* Assembly listings, but it hasn't been converted to DATA statements and you do not own an editor/assembler, check to see if the program is included on our Instant CoCo cassette. All Assembly programs on Instant CoCo are in assembled form, meaning you can load and execute them immediately.

## Speaking of DATA Statements

Since DATA statements often consist of numbers only, it is easy to make a mistake typing them in. One wrong number can crash the program or lock up your machine. When this happens, the only way to recover is often to turn off the computer for a few seconds and then turn it back on. Of course, this wipes out your program in memory.

To avoid this, always save what you have typed in before running it. That way, if you did make a mistake, you can load the program from tape or disk to look for the error,

rather than retyping the entire listing.

One last thing about DATA statements: Error messages that occur due to a mistyped DATA statement line will refer to the corresponding READ statement line earlier in the program. Yet it is the DATA statement that is incorrect.

## If All Else Fails

If you cannot get your typed-in listing to run after checking and double-checking for typos, you can ask us for help. Send a detailed description of your problem along with any error messages given. Ideally we'd like a printout of what you typed. Send a self-addressed, stamped envelope for the fastest reply. Sorry, but we cannot help you if you have modified the original program in any way. Write to *HOT CoCo*, attn. Technical Editor, 80 Pine St., Peterborough, NH 03458.

## Different ROMs

Radio Shack has updated the Basic ROMs in the Color Computer several times since it was introduced. Below is a list of the ROMs and the problems and benefits you might encounter with each one:

- Color Basic 1.0—Cannot fully use the 64K upgrade and has only a 7-bit serial printer routine, which inhibits sending graphics data to a printer.
- Color Basic 1.1—Fully supports 64K and has an 8-bit serial printer routine for graphics.
- Color Basic 1.2—Executes code faster than previous versions, but changed the way the ROM reads the keyboard. This makes some software written for the older ROMs incompatible with the 1.2 ROM. There is a simple fix, which *HOT CoCo* incorporates into every program in which this problem is encountered.
- If you don't know what Color Basic ROM version you have, type EXEC 41175 after you first turn on your computer. The ROM version will be printed on the screen.
- Extended Basic 1.0—Has bugs in the PCLEAR, PRINT USING, and DLOAD statements.
- Extended Basic 1.1—Fixes the above-mentioned bugs.
- Disk Basic 1.0—This is in the disk controller cartridge used with the grey CoCos and grey disk drives. The 1.0 Disk ROM is incompatible with CoCo 2's.
- Disk Basic 1.1—Works faster than 1.0, but you can use the 1.1 Disk Basic controller with the older, grey CoCos. Also, many routines have been moved, making some programs written using the 1.0 Disk ROM incompatible with the 1.1 ROM. (See "A Quick Fix for Your Disk ROM," by Mike Meehan, *HOT CoCo*, February 1985, p. 44, for a utility that overcomes this incompatibility in most cases.)■





# NEW! HARD DISK FOR TANDY® 1000\*

introducing **The Rose®** by OSICOM, Inc.

## 10 MB Internal

*Controller, Drive  
Cables, & Manual*

**\$699**

## 20 MB Internal

*Controller, Drive  
Cables, & Manual*

**\$899**

## 10 MB External

*Controller, Drive in  
enclosure with fan and  
power supply,  
Cables, & Manual*


**\$975**

## 20 MB External


*Controller, Drive in  
enclosure with fan and  
power supply,  
Cables, & Manual*

**\$1199**

**Easily user-installed - fully documented instructions.  
System "boots" from hard disk without floppy diskette.  
Runs Lotus, DBASE II — and Tandy 1000 software.  
One year warrantee on all equipment.  
Toll-free technical support hot-line.**

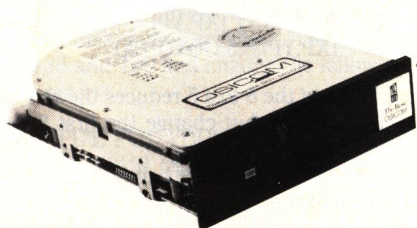


Orders and Information:  
1-800-922-0881 TOLL FREE  
201-540-0144 IN NEW JERSEY

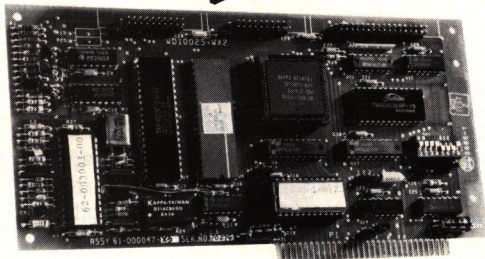

18 Bank Street  
Morristown, N.J. 07960

Circle Reader Service card #200

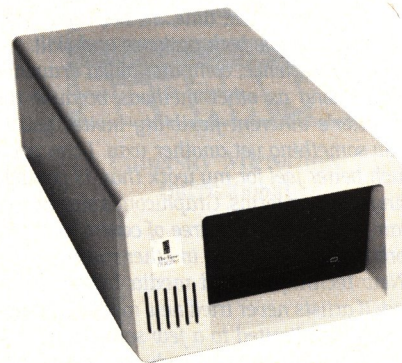

COD no Surcharge. Visa & MC 3%. Amex 5%.

\*Requires Memory Expansion Board with DMA Controller (25-1004).  
Tandy is a registered trademark of Tandy Corporation.



# Letters to the Editor

Send your letters to Letters to the Editor, HOT CoCo, 80 Pine St., Peterborough, NH 03458.

## Computers Not For Art

I was thoroughly disgusted with the article by Paul Statt, "Portrait of the CoCo Artist" in the February 1985 issue of HOT CoCo (p. 28).

I would like to know why drawing is so impossible for Ana Landa without her computer. Doesn't she have access to pencil and paper? The elements that make up a good work are patience and skill. It may not be easy to correct mistakes on paper, but you can sketch lightly first and then darken in. Furthermore, you can't get as much feeling as you really should when you use a computer to draw. Drawing and sketching shouldn't be made easy because they aren't.

Eric White has a few of his facts straight, but covering up mistakes isn't important. It's using mistakes to enhance a picture that makes a drawing more interesting. Picasso, for example, left his mistakes in and it didn't hurt his works. Frankly, it doesn't matter if you make mistakes and let them show.

And a word to Whitesmith, you can already make enlargement, reduction, rotation, or section transfers by hand and do it better than the computer can. You can't add as much detail by computer as you can by hand, so you have more flexibility on paper.

It's also not true that a water color has to come out right the first time. With pen and paper, you can always change your mistakes into new and better pictures; with the computer you erase your mistakes immediately and forget them.

I have nothing against creating pictures on the computer, it's fun. But I don't think the computer should be used for professional art. The rest of the February issue was great and I enjoyed it very much.

Susan Mohr  
Cottonwood, MN

Drawing isn't impossible for me without a computer. It's easier; that's important because I have very little free time. You're right, good work does involve both patience and skill.

In my experience, computer-aided drawings take as long as other methods because the computer's inherent flexibility invites you to draw something yet another way. I can get a much better feel for my work than is possible using other art forms. Graphicom's stamps, for example, give me a degree of control over my work that is impossible in other media.

New techniques and media benefit mankind; if artists never tried new media, perhaps we'd still be limited to a few scrawls on cave walls. The computer already has a place in professional art. Look at CAD (Computer-Aided Design/Drawing), for instance. If we were unable to use computers professionally, we'd be taking a large technological step backward at the expense of efficiency. I prefer to let

people do the thinking and let computers do the work.

Computer art can be reproduced exactly and even transmitted over phone lines. No other medium allows so many people to enjoy a perfect original or presents such potential for artistic collaboration.

Drawing should be easier so that more people could enjoy it. Thank you for the opportunity to expand on my original comments. I hope you enjoy your hobby as much as I enjoy mine!

Ana Landa

Our program doesn't do anything creative; it's a tool, like charred sticks on a cave wall were at one time. Statements from your letter indicate that you feel art should be left in the hands of those with the right technical skill. If creativity can be expressed in such varied media as music, sculpture, poetry, dance, and painting, then it is creativity that is important, not the technical expertise with which it was rendered, nor the form that it embodies.

The artistic work of school children shows a marked decline during adolescence when they can no longer satisfactorily express themselves with their limited technical skills. Some improve their skills, but most stop trying. Given a creative outlet that requires less skill, they will again experiment with expression.

If you are doing commercial artwork or painting a portrait, you can't afford to make a mistake. Fear of making mistakes may prevent someone for whom drawing is difficult from venturing an untried stroke. The ability to undo mistakes encourages experimentation.

The computer with its limited resolution, texture, and color is nonetheless a perfectly valid medium for creativity. As long as the computer doesn't channel or limit our imagination, it will remain so.

Eric White

## Back in Orbit

Blast! Although the author's original was fine, a bit-drop error occurred in R. Dewain Poe's program, World Map ("Orbital Observations," HOT CoCo, April 1985, p. 30). Here are the corrected lines:

```
66Ø DRAW" M13Ø,96;M126,96;M122,92
;M122,87;M124,84;M132,84;M134,89
;M134,83;M136,77;M136,73;M144,65
;M146,65;M146,67"
88Ø DRAW" BM3Ø,98;M32,98;M32,1ØØ;
M3Ø,1Ø1;M3Ø,1Ø3;M28,1Ø2;M28,1ØØ;
M3Ø,98": PAINT(3Ø,99),6,6;DRAW" BM
32,1Ø3;M34,1Ø4;M3Ø,1Ø6;BM3Ø,1Ø8;
M34,1Ø6;M34,11Ø;M32,11Ø;M32,1Ø8;
M3Ø,1Ø8" 'PHILLIPINE ISLANDS
93Ø DRAW" BM62,153;M66,157;M6Ø,16
5;M56,163;M62,157;M62,153": PAINT
(6Ø,163),6,6 'NEW ZEALAND
1Ø4Ø DRAW" BM184,45;M186,5Ø;M186,
56;M182,56;M182,53;M184,52;M184,
5Ø;M182,47;M184,45;M184,48": PAIN
```

```
T(184,55),6,6;DRAW" BM178,54;M178
,5Ø;M18Ø,5Ø;M18Ø,53;M178,54" 'BRI
TISH IS.
```

—eds.

And now, a word from the author:

I have received letters and calls on my World Map and Satellite Tracking Programs (HOT CoCo, April 1985, p. 31). The system requirements specified Extended Color Basic, but some people are trying to use the programs with Disk Basic. They get an SN error because AS is a reserved field command in Disk Basic. Change the variable AS in lines 260-300 of Satellite Tracking to AZ to solve this problem.

There were two bit-drop errors in the Satellite program listing. In line 760, insert a less-than symbol (<) after CL. In the third 32-character line of line 1430, insert a comma, changing the motion command from M3098 to M30.98.

If North America doesn't show on your map, check the COLOR statement in line 620 of World Map and line 1200 of Satellite Tracking. Also check your PAINT commands.

The World Map program uses colors 6 (cyan) and 7 (magenta) from color set 1. To get blue and green, you must adjust your TV's tint control. I chose these colors instead of colors 1 (green) and 2 (blue) of color set 0 to allow easy modification into a high-resolution black-and-white map by changing PMODE 3 to PMODE 4 in line 30.

If you prefer a black-on-green hi-res map in either program, change the SCREEN commands to SCREEN 1.0 in lines 105 and 250 of World Map and line 380 of Satellite Tracking. To then use the plotting routine in World Map with either hi-res screen, add the following line:

```
265 IF PPOINT(XP,YP)=0 THEN CIRCLE
(XP,YP),8.5;GOTO 100
```

Changing the 8 to a 5 reduces the size of the circle drawn, but change the first 8 in line 270, too.

I hope these fixes are helpful to those using the programs.

R. Dewain Poe

## MC-10 Graphics Available?

Does anyone have a good graphics program for the MC-10 that uses the control keys, supports all eight colors, offers LOAD and SAVE features, and includes a screen-dump routine? I have a 20K MC-10 with cassette and a CGP-220 printer.

Arne J. Gregor  
1606 Lincoln Court  
Reading, PA 19605



## Tape-to-Disk Instructions

Discovering *HOT CoCo* was a real pleasure. I particularly enjoy the articles and programs that help me to understand computer operations better. Basic programs present no problem for me, but machine-language programs are difficult, especially when they require transferring information from tape to disk. Articles sometimes tell how to do this, but generally I'd appreciate it if all articles did so, or if *HOT CoCo* published some general instructions for this type of transfer.

I have gradually upgraded my system from the original 16K CoCo 2 with a cassette drive to a 64K system with three disk drives and a DMP-110 printer. Like many people, I had trouble finding an acceptable arrangement for my new equipment, that is until I bought a computer table from The Sharper Image, 650 Davis St., San Francisco, CA 94111. Their computer stand #DGR103 (\$149) and two shelf risers #DGR104 (\$69) offer ample room for all my equipment, including my 9-inch monitor and Multi-Pack Interface, and still leave room for some of my books. I'm sure other subscribers with limited space would find this stand useful.

I've also purchased the complete VIP library of software and many other programs advertised in your magazine. I find them all very useful and educational. Please keep up your good work.

Herbert E. Crumrine  
Rochester, NY

## Better Track Record

Dennis Elfert's disk-saving program (*HOT CoCo*, March 1984, p. 54) is excellent. Keith Langill modified the program to work on two disks (*HOT CoCo*, July 1984, p. 8). For a simpler modification, reverse the position of the directory disk and object disks. Then delete lines 135 and 140 and change the following line to read:

```
53 INPUT "PUT YOUR D.D. IN DRIVE 0
AND YOUR OBJECT DISK IN DRIVE
1":Q$
120 DSK1$ 1,17,X,D$(Y),E$(Y)
365 DSK0$ 1,17,X,D$(Y),E$(Y)
```

Robert W. Freedman  
Pittsburgh, PA

## Use Auto-Page With ROM Packs

Your article "Don't Print There!" (*HOT CoCo*, March 1985, p. 48) was the answer to my prayers. I have been using the Color File ROM pack to keep track of my inventory and print the entire file. It used to be very frustrat-

ing when the printer printed over the perforation. Now, thanks to you, all is well.

Readers might be interested in my fix to get the program to work with a ROM pack. First, holding the pack in front of you with the label facing away and the arrow up, disable the auto-start by placing a small piece of tape over the auto-start pin (the first one from the left). When the pack is in the computer, the screen shows the normal introductory logo, as if there were no ROM pack in the slot. To start the pack, type EXEC 49152. To revert to Basic, press the reset button. You can go back and forth as often as you like.

To use Auto-Page with the ROM pack, insert the pack and turn on the computer. CLOADM and EXEC Auto-Page; then EXEC 49152 and you are in Color File.

If, after you complete the listing, you wish to print another list, just press the reset button to get back to Basic, reposition the paper, POKE 32760,0 to reset the counter, and EXEC 49152 to put you back in the ROM program.

The disabling technique works for other ROM packs, too. I have used it with Videotex to save the buffer to tape.

Robert E. Niesyn  
Cromwell, CT

## Negative-Image Dumps

In the February 1985 issue, *HOT CoCo* featured an article, "Do it Yourself Dumps," (p. 40), dealing with a screen-dump utility. R. Steven Berry's program works well, but it doesn't allow my Radio Shack DMP-105 printer to produce a negative image. To switch to a negative image on the DMP-105, insert these four lines:

```
54 FOR X =&H3FB6 TO &H3FBE
55 READ A:POKE X,A
56 NEXT X
260 DATA 182,62,171,67,138,128,
126,62,65
```

Change line 140 to:

```
140 DATA 38,239,126,63,182,18,
132,213,133,64
```

Lines 54-56 are a new routine to do an LDA STORE, COMA, and ORA \$80 and then return to the main loop at \$3E41. Line 260 is the data for the routine at \$3FB6. The change in 140 routes the processor to 3FB6 and also moves the COMA to the routine at 3FB6 (put in an NOP where the COMA used to be).

Since I moved the COMA from &H3E41 to &H3FB9, you have to POKE &H3FB9 with 18 to get a negative image. To return to regular mode, POKE &H3FB9 with 67.

I hope this modification helps other readers. By the way, I just love the new DMP-105.

Many people I know who bought more expensive printers are surprised at the number of features it has.

Neal Park  
Phoenix, AZ

## Statistical Programs for 64K


Stephen Hicks asked about statistical-analysis programs for a 64K machine (*HOT CoCo*, October 1984, p. 11). I wasn't sure I could help, but I sent him references to three programs written in Basic. To my surprise, he wrote back to say he'd received nine other replies, all asking if he'd found anything, and suggested I write to you.

Enclosed are the references I have. I'd appreciate hearing about similar program collections (regardless of the language).

Kanter, Harold, *Computer Applications of Educational Measurement Concepts*. New York: Macmillan, 1985. (oriented toward correlational analysis)

Van Tassel, Dennie, *Basic-Pack Statistics Programs for Small Computers*. Englewood Cliffs, NJ: Prentice-Hall, 1981. (the most di-

## This Publication is available in Microform.



### University Microfilms International

Please send additional information

for \_\_\_\_\_  
Name \_\_\_\_\_  
Institution \_\_\_\_\_  
Street \_\_\_\_\_  
City \_\_\_\_\_  
State \_\_\_\_\_ Zip \_\_\_\_\_

300 North Zeeb Road  
Dept. P.R.  
Ann Arbor, Mi. 48106



verse of the three and the most expensive)  
Wolach, Allen H., *Basic Analysis of Variance Programs for Microcomputers*. Monterey, CA: Brooks/Cole, 1983.

Mike Wogan  
Dept. of Psychology  
Rutgers University  
Camden, NJ 08102

## Where's the Software?

I am a CoCo user from Toronto, Canada. I enjoy programming and using my CoCo but can't seem to find any places in Toronto carrying software for it. I wonder if readers know of a distributor in Toronto. I am also looking for a Canadian distributor of Instant CoCo because, if I order it from the U.S., it takes ages to get through customs.

Rob Kraft  
22 Robingrove Rd.  
Willowdale, Ontario  
M2R 2Z7, Canada

## Plea for MC-10 Users

Including the minimum RAM requirements for listings in articles is great, but it doesn't go far enough. A requirement of 32K

eliminates a 16K unit, but 20K, a common arrangement for the MC-10, might be sufficient. In addition, readers might pare a listing, eliminating remarks or sections that aren't essential to them. It is easier for the programmer to take a count than it is for the readers. A notation of the actual byte requirement for each program as written, stated in the opening program line, would be helpful.

Don't ignore us MC-10 users. We still support you and would like to be supported in return.

Roger Koach  
Apple Valley, CA

*We try to convert every Color Basic program we publish to the MC-10, and all programs that are MC-10 compatible are listed as such in the System Requirements boxes. Your suggestion to include the minimal requirements in remark statements is a good one. We urge anyone writing programs for HOT CoCo to keep this in mind.—eds.*

## TRSCOPY Bug

There is a minor omission in the otherwise excellent new TRSCOPY routine from Radio Shack. Basic-09 won't load a transferred

ASCII Disk Basic program. Apparently, TRSCOPY doesn't assign the proper OS-9 file-header language value in the conversion. This value is included in the file header to prevent crashing the system if you load a wrong module.

However, most security measures can be defeated with a little experimentation. The key is to fool OS-9 and Basic-09 by either modifying the file-header language value or by imbedding the offending file in another file with the proper characteristics. You can do this with an Assembly-language routine, but it's simpler to create a one-line Basic-09 program file with just a REM statement and save it. Next, use OS-9's merge utility to combine the first two files (the legitimate file must be listed first). You can then load the new, merged file. This method seems to work because OS-9 checks the header data only once when you use Basic-09.

I hope Tandy notices this and issues a new version that handles Disk Extended Color Basic to Basic-09 conversion more readily. Files of type /BAS should receive the proper header language value when converted to OS-9.

Fred Niemczenia  
Fort Meyers, FL

# SUPPORT

(sə-pôrt) v.t. **1.** To bear the weight of, especially from underneath; uphold in position; keep from failing, etc. **2.** To bear or sustain (weight; etc.) **3.** To keep from failing; strengthen: *PBJ, Inc. supports their product line with technical personnel that are always there to help you.* **4.** To serve, to uphold or corroborate (a statement, theory, etc.) substantiate; verify: *PBJ, Inc. receives testimonials on a daily basis that support their product line.* **5.** To provide (a person, institution) with maintenance; provide for: *PBJ, Inc. supports the CoCo user by consistently creating new advancements in their field.*

Synonym: **PBJ, Inc.** Circle Reader Service card #214

A long description indeed, yet very applicable to the kind of service delivered by PBJ, Inc. When the serious CoCo user needs back-up support, technical information or assistance, PBJ, Inc. is there! From the products they manufacture through to the strategic solutions they offer, PBJ, Inc. has rightfully gained the reputation of "the company with the most support for the Color Computer."






inc.

"Innovative Products for the CoCo User"

Call or write today for our **FREE** Catalog ...  
P.O. Box 813 • North Bergen, N.J. 07047 • **201-330-1898**

\* Derived from Funk & Wagnall's International Dictionary

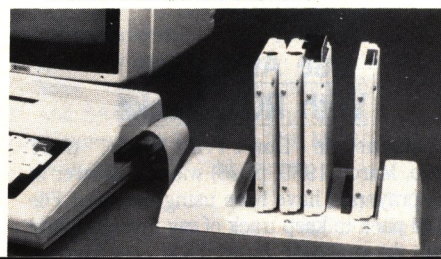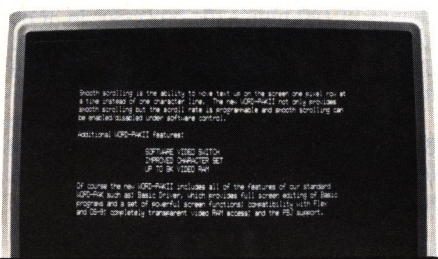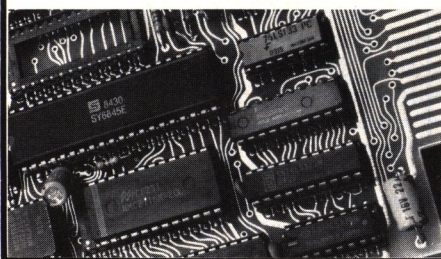





## Blackjack Dealer Feeler Dealer

These two programs help you develop your Blackjack skill and strategy. In **Blackjack Dealer**, the computer deals the cards and plays the dealer's hand against you. **Feeler Dealer** enables you to test your strategy by playing the desired number of hands using your techniques & tendencies. A great teacher for new Blackjack players and a valuable tool for the veteran player. Both programs included. 32K extended. Tape - \$24.95. Disk or Amdek - \$29.95.

### EAGLE

A graphic-enhanced lunar lander simulator. The pilot breaks out of lunar orbit and attempts a soft landing on the lunar surface. Joysticks control thrust and craft altitudes and information is continually displayed on horizontal and vertical velocities, acceleration values, vertical and horizontal distances from target, fuel consumption and much more. On advanced levels, problems such as fuel leaks and computer screen failures can provide hair-raising final approaches. Disk version allows choice of landing site between Mars and Earth's moon. Takeoffs from the surface can be made and the upper stage placed back in orbit. The simulation is as educational as it is fun and exciting. Superb graphics! A great tool for that future astronaut or physicist. 32K, 2 joysticks required. Tape - \$24.95. Disk or Amdek - \$29.95.

### Sketchpad

Sketchpad is a graphics drawing program designed to provide the computer hobbyist with easy manipulation of the powerful graphics capabilities of the Coco. Advanced programmers can design graphics screens and characters for Basic and ML programs and games. Sketchpad was used to create the graphics for "Eagle".

Two joysticks control cursors that provide endpoints and boundaries for lines, boxes, circles, ellipses and painting. Point-to-point drawstrings may be plotted on the screen and then rotated, enlarged or shrunk, moved or inverted. Patterns may be programmed in easily to create dazzling illusions using lines, boxes, circles, ellipses and drawstrings. Sketchpad supports all PMODES and color sets and gives false colors in PModes 1 and 4. Text and graphics can be combined on high-resolution screens. All pictures and drawstrings can be saved to disk for future use. 32K, 2 joysticks required. Disk only. \$29.95.

### TESTMAKER

Menu-driven series that creates multi-choice & T/F tests. Output to screen & printer. 32K Disk. \$29.95.

### Maycode

A 6809 Disassembler. Maycode will read the machine code from memory and convert it to standard 6809 Assembly Language Mnemonics. Output can be sent to screen, printer, cassette, or diskette. The output to cassette or diskette may be reloaded into EDTASM+ for modification or reassembly. 16K min. Tape - \$24.95. Disk - \$29.95.

### TDIR

TDIR is a menu-driven, user-friendly tape directory program. When installed and maintained on your cassette tapes, it allows complete directory control of your tapes. This means you will no longer need to go through a complete tape to discover that the program you wanted is on another tape. TDIR also eliminates the drudgery of trying to remember tape position settings, or program names. All this, and more, is controlled by TDIR. 16K tape. \$24.95.

### Alphacopy

It is nice to have an alphabetized disk directory but if that should crash, it doesn't help tell you where the programs are. Alphacopy will fully alphabetize your disk; that is, write the programs in alphabetical order. Each program will be written on the same or consecutive sectors, thus making rebuilding of the disk much easier with the other currently available disk "zapping" utilities. ALPHACOPY will also allow you to format disks up to 80 tracks if your drive allows, thus giving you more space to store programs per disk. 32K. Disk or Amdek - \$24.95.

### Co-Co Receivables

Keep track of all those accounts with current list of accounts, statement printing, last activity date, and current month's transactions, debits & credits. Disk storage of data. 32K Disk. \$29.95.

### Stars Of America

Education should be fun - this program is just that! This tutorial uses 25 of the superstars of American history, from George Washington to Ronald Reagan.

### The Civil War

A challenging two - person game. Questions cover Carpet Baggers to the Battle of Vicksburg. Points are assigned according to the difficulty of the question, scores are displayed throughout the game.

Both Only: Tape 19.95. Disk 24.95

### History From 1607 To 1976

On two 16K non-extended tapes. For 1-4 people. Informative & fun way to learn important dates in world history. Written for students by a teacher. Tape - \$19.95. Disk or Amdek - \$24.95.

### TREASURE HUNT

A graphics text adventure. You walk with our graphics character through desert, mountains and city to seek the illusive treasure of gold. Super graphics with a person who walks with you at each turn. 64K. Disk & Amdek only - \$29.95.

### Loveless Manor

Trapped in a bedroom by your evil aunt, you've admired Queen Cinderella's castle in the distance... and you've just discovered she's a distant cousin. Can you escape to her protection? 32K. Great word adventure. Tape - \$19.95. Disk or Amdek - \$24.95.

### Raid On Burdanovka

Your mission: should you decide to accept it, is to steal Russia's newest weapon and save the world. Text adventure with 50 rooms. Tape - \$24.95. Disk or Amdek - \$29.95.

### Search For The Llangh

After years of study & searching, you have at last traced the alien race of Llangh to this valley. Now your quest for the power of Llangh begins! Tape - \$24.95. Disk or Amdek - \$29.95.

Also Available For TRS-80 Model 100


### OTHXO

Othello\* machine language game for the 16K Ext. Co-Co. 2 modes of play - you against a friend or you against the computer. When playing the computer, it will play hard or easy. Object of the game is to change the opponent's spots to yours by placing your marker at the end of a row started by your marker. Not as easy as it sounds! Tape, \$24.95. Disk or Amdek, \$29.95.

### CO-CO KENO

Bring Las Vegas' Keno game home with Co-Co Keno. Bet \$1, \$3 or \$5 & mark off 1 to 15 spots...can you beat the odds & win \$50,000? 16K, high resolution screen. Keno chart print included. Tape, \$24.95. Disk or Amdek - \$29.95.

## Hardware, Too!




### Amdek Dual 3" Disk Drive

# \$349

Includes Box Of Diskettes And Drive Cable

**If You Can Find A Better Advertised Price, Show Us...We'll Beat It!**



### Amdek Color Monitors

Color 300      Color 500

\$269

\$399

Amdek Color 1+

\$199

Reconditioned - 90 Day Warranty

MDP Universal Video Driver - \$25.95 With Purchase

### Mark Data Universal Video Driver

Works On All Cocos • No Soldering

\$27.95

### Video Reverser Switch

Have reverse video at the flip of a switch! Easy installation, no soldering, works on all models, except new 16K Coco 2.

\$11.95

ESK 5 1/4" Disks - SSDD	Box Of 10	\$16
ESK 5 1/4" Disks - DSDD	Box Of 10	\$21
100% Tested Disk • 10 Year Exchange Warranty		
Amdek 3" Diskettes	Box Of 10	\$35

## This Month's Special!

Tom Mix Software

10% Off

Already Discounted Prices!

Call For Sale Prices

Good Through 5/20/85 • While Supplies Last!

Send For Our Free Catalog

**\$1.00 Shipping!**

We'll Ship Your Order  
To Anywhere In The USA For \$1.00

Software Only - Hardware Shipped At Cost  
Outside USA - \$2.00 Per Program (\$6.00 Max.)

See Our Other Ad In This Issue

# Saguaro Software

Circle Reader Service card #160



NEW 24-HOUR ORDER LINE

602-795-4159



7331 E. Beverly Drive • Tucson, AZ 85710

Arizona Residents Add 7% Tax • C.O.D. Orders Add \$2.00

Add \$1.00 For Shipping

Dealer Inquiries Invited • Some Quantities Limited

**AUTHORS! ASK ABOUT OUR ROYALTY PROGRAM**



## More Protection

I'd like to offer an alternative to Mr. Hill's method of protecting unauthorized use of your disk files (*HOT CoCo*, April 1985, p. 13). Simply use this formula: SAVE "file name" + CHR\$(143). The directory then shows the name of the file, so anyone trying to load it would type in the name listed, but the CoCo would return an NE error because it doesn't see CHR\$(143). You can get into the file by typing LOAD "file name" + CHR\$(143). To kill a protected file, type KILL "file name" + CHR\$(143) + "/BAS".

Barry Hornstein  
E. Rockaway, NY

## Home Improvement

Mr. Rose's Homespread program is great. But I added a HOME command to eliminate tapping the arrow key to get the cursor to A1. I also added an exponential function to allow formulas with square roots and exponents.

Change the program to read:

```
600 PRINT@488,"COMMAND:B,C,I,P,S
,T,H?"
651 IF SC$="H" THEN 800
2841 IF MID$(FT$(W),4,1)="^" THEN
RE=VAL(OP$(1))^VAL(OP$(2))
2891 IF MID$(FT$(W),8,1)="^" THEN
N RE=RE^VAL(OP$(3))
800 PRINT@448,"HOME":FOR D=1 TO
500:NEXT:POKE1023+L,143:L=34:HP=
1:VP=1:RL=1:Y=1:GOSUB1800:GOSUB9
55:GOTO120
```

Then you can execute HOME and have the cursor move to A1 by typing /H. To find a square root, raise the number to a power of 0.5.

I'd like to exchange information with anyone interested in computers.

Petri Pellinen  
Rajavartio 32A 2  
SF-55910 Imatra 91  
Finland

## Accurate Timing

Your answer to a reader's letter on disk-drive timing programs (*HOT CoCo*, April 1985, p. 13) misses the point completely. When you calibrate the speed of a drive, its long-term stability is not dependent on your accuracy but on the quality of the mechanical and electrical components in the drive. You calibrate a drive to make it compatible with someone else's disk so that you can exchange disks. Therefore, you must use a common time standard against which you measure the calibration.

Even if your program is accurate (no small matter), your CoCo's master oscillator may not be. You need a high-quality frequency counter that has already been calibrated against a laboratory standard to first calibrate the oscillator. It would be better to use the frequency counter to calibrate the drive in the first place.

In any case, the tolerance variance in the index-hole location on different disk results

in such a deviation in measured speed that you need a certified reference disk to do a drive calibration.

Robert Gault  
Grosse Pointe Woods, MI

## Clubhouse

Have a Color Computer club? Let prospective members know about it through a letter to the Editor.

## N.E. CoConuts Correction

We would like to point out an error made in "HOT CoCo's Worldwide User's Group List," (*HOT CoCo*, February 1985, p. 49). The information listed in the table is out of date. Our permanent address is:

New England CoConuts  
P.O. Box 6604  
Providence, RI 02940-6604

As club secretary, I am the contact person and can be reached at 401-739-8743. We ask that all inquiries include a stamped, self-addressed envelope. No collect calls, please.

Robert J. Sullivan, Jr.  
Providence, RI

## Fort Worth, TX

The Fort Worth CoCo User Group meets the fourth Tuesday of each month from 6:30-8:45 p.m. in Classroom B at the Downtown Public Library at 300 Taylor St. For more information, call Lloyd Rogers (294-9904), Barry Pottinger (297-2732), or Harley Ainsworth (834-9030).

Lloyd Rogers  
Fort Worth, TX

## Toledo, OH

The Greater Toledo Color Computer Club has just celebrated its second anniversary. The club meets the first Thursday of each month at the Wernert Civic Association Bldg., 5060 Douglas Road, Toledo, OH. They operate a members-only BBS and are offering a machine-language class. Contact Bob Butler at 537-1432.

Ronald L. Hall  
Monclova, OH

## Mercer County, NJ

CoCo users interested in joining The Mercer County Color Computer Club should call 609-883-0823.

A.T. Most  
Lawrenceville, NJ

## Kingston, Ontario

The newly formed Kingston CoCo Club meets the first Monday of every month at Kingston City Hall. If you would like more information contact me at 613-389-0467 or Ken, our president, at 613-544-2806.

Kanti Dinda  
Kingston, Ontario

## On Line

Are you operating a BBS? Send us a note to let our readers know about your service.

## Important Correction: Wrong Number

"HOT CoCo's BBS Phone Book" (April 1985, p. 48) contained three incorrect phone numbers. The numbers for the Samoht BBS in Reston, VA, the Careers BBS in Dallas, TX, and Colorama of El Paso, TX, are incorrect. Please do not call these numbers.—eds.

## Sunnyvale, CA

The Computer Literacy Bookshop Network offers customers access to its catalog during off hours (Monday through Friday from 8:30 p.m. to 9 next a.m., and Saturday and Sunday 6:30 p.m. to 9:30 next a.m.). To access the network, dial 408-730-9959, press two carriage returns, type the word "books," and type "R Conference" to view the main topics. Once you are logged on, type "Read Help Complete" for further instructions.

Computer Literacy Bookshop  
520 Lawrence Expressway  
Suite 310  
Sunnyvale, CA 94086

## NY, NY Update

Our BBS, Grand Central Terminal, now supports both 300- and 1,200-baud users. As always, we are up 24 hours a day, 7 days a week at 212-682-0681. Our thanks to HOT CoCo readers for their contributions, uploads, and support.

Steve Schechter  
New York, NY

## Tampa Bay Area, FL

Compunet BBS of St. Petersburg, FL, is open to all callers, 24 hours a day, 7 days a week. It features downloading, uploading, text files, trivia, worldwide news and weather, and more. You can reach the board (300/1,200 baud) at 813-321-0397.

Emery Mandel  
St. Petersburg, FL



# Telewriter-64™

## the Color Computer Word Processor

- **3 display formats: 51/64/85 columns × 24 lines**
- **True lower case characters**
- **User-friendly full-screen editor**
- **Right justification**
- **Easy hyphenation**
- **Drives any printer**
- **Embedded format and control codes**
- **Runs in 16K, 32K, or 64K**
- **Menu-driven disk and cassette I/O**
- **No hardware modifications required**

### THE ORIGINAL

Simply stated, Telewriter is the most powerful word processor you can buy for the TRS-80 Color Computer. The original Telewriter has received rave reviews in every major Color Computer and TRS-80 magazine, as well as enthusiastic praise from thousands of satisfied owners. And rightly so.

The standard Color Computer display of 32 characters by 16 lines without lower case is simply inadequate for serious word processing. The checkerboard letters and tiny lines give you no feel for how your writing looks or reads. Telewriter gives the Color Computer a 51 column by 24 line screen display with *true lower case characters*. So a Telewriter screen looks like a printed page, with a good chunk of text on screen at one time. In fact, more on screen text than you'd get with Apple II, Atari, TI, Vic or TRS-80 Model III.

On top of that, the sophisticated Telewriter full-screen editor is so simple to use, it makes writing fun. With single-letter mnemonic commands, and menu-driven I/O and formatting, Telewriter surpasses all others for user friendliness and pure power.

Telewriter's chain printing feature means that the size of your text is never limited by the amount of memory you have, and Telewriter's advanced cassette handler gives you a powerful word processor without the major additional cost of a disk.

*...one of the best programs for the Color Computer I have seen...*

— Color Computer News, Jan. 1982

### TELEWRITER-64

But now we've added more power to Telewriter. Not just bells and whistles, but major features that give you total control over your writing. We call this new supercharged version Telewriter-64. For two reasons.

### 64K COMPATIBLE

Telewriter-64 runs fully in any Color Computer — 16K, 32K, or 64K, with or without Extended Basic, with disk or cassette or both. It automatically configures itself to take optimum advantage of all available memory. That means that when you upgrade your memory, the Telewriter-64 text buffer grows accordingly. In a 64K cassette based system, for example, you get about 40K of memory to store text. So you don't need disk or FLEX to put all your 64K to work immediately.

### 64 COLUMNS (AND 85!)

Besides the original 51 column screen, Telewriter-64 now gives you 2 additional high-density displays: 64 × 24 and 85 × 24!! Both high density modes provide all the standard Telewriter editing capabilities, and you can switch instantly to any of the 3 formats with a single control key command. The 51 × 24 display is clear and crisp on the screen. The two high density modes are more crowded and less easily readable, but they are perfect for showing you the exact layout of your printed page, *all on the screen at one time*. Compare this with cumbersome "windows" that show you only fragments at a time and don't even allow editing.

### RIGHT JUSTIFICATION & HYPHENATION

One outstanding advantage of the full-width screen display is that you can now set the screen width to match the width of your printed page, so that "what you see is what you get." This makes exact alignment of columns possible and it makes hyphenation simple. Since short lines are the reason for the large spaces often found in standard right justified text, and since hyphenation is the most effective way to eliminate short lines, Telewriter-64 can now promise you some of the best looking right justification you can get on the Color Computer.

### FEATURES & SPECIFICATIONS:

**Printing and formatting:** Drives any printer (LPV/III/VIII, DMP-100/200, Epson, Okidata, Centronics, NEC, C. Itoh, Smith-Corona, Terminus, etc).

Embedded control codes give full dynamic access to intelligent printer features like: underlining, subscript, superscript, variable font and type size, dot graphics, etc.

Dynamic (embedded) format controls for: top, bottom, and left margins; line length, lines per page, line spacing, new page, change page numbering, conditional new page, enable/disable justification.

Menu-driven control of these parameters, as well as: pause at page bottom, page numbering, baud rate (so you can run your printer at top speed), and Epson font. "Typewriter" feature sends typed lines directly to your printer, and Direct mode sends control codes right from the keyboard. Special Epson driver simplifies use with MX-80.

Supports single and multi-line headers and automatic centering. Print or save all or any section of the text buffer. Chain print any number of files from cassette or disk.

**File and I/O Features:** ASCII format files — create and edit BASIC, Assembly, Pascal, and C programs, Smart Terminal files (for uploading or downloading), even text files from other word processors. Compatible with spelling checkers (like Spell 'n Fix).

Cassette verify command for sure saves. Cassette auto-retry means you type a load command only once no matter where you are in the tape.

Read in, save, partial save, and append files with disk and/or cassette. For disk: print directory with free space to screen or printer, kill and rename files, set default drive. Easily customized to the number of drives in the system.

**Editing features:** Fast, full-screen editor with wordwrap, block copy, block move, block delete, line delete, global search and replace (or delete), wild card search, fast auto-repeat cursor, fast scrolling, cursor up, down, right, left, begin line, end line, top of text, bottom of text; page forward, page backward, align text, tabs, choice of buff or green background, complete error protection, line counter, word counter, space left, current file name, default drive in effect, set line length on screen.

Insert or delete text anywhere on the screen without changing "modes." This fast "free-form" editor provides maximum ease of use. Everything you do appears immediately on the screen in front of you. Commands require only a single key or a single key plus CLEAR.

*...truly a state of the art word processor...  
outstanding in every respect.*

— The RAINBOW, Jan. 1982

### PROFESSIONAL WORD PROCESSING

You can no longer afford to be without the power and efficiency word processing brings to everything you write. The TRS-80 Color Computer is the lowest priced micro with the capability for serious word processing. And only Telewriter-64 fully unleashes that capability.

Telewriter-64 costs \$49.95 on cassette, \$59.95 on disk, and comes complete with over 70 pages of well-written documentation. (The step-by-step tutorial will have your writing with Telewriter-64 in a matter of minutes.)

To order, send check or money order to:

**Cognitec**  
704 N. Nob St.  
Del Mar, CA 92014

Or check your local software store. If you have questions, or would like to order by Visa or Mastercard, call us at (619) 755-1258 (weekdays, 8AM-4PM PST). Dealer inquiries invited.

**NOW AVAILABLE AT  
RADIO SHACK STORES  
VIA EXPRESS ORDER.**

Apple II is a trademark of Apple Computer, Inc.; Atari is a trademark of Atari, Inc.; TRS-80 is a trademark of Tandy Corp; MX-80 is a trademark of Epson America, Inc.



# Doctor ASCII

by Richard E. Esposito and Jesse W. Jackson

*Having technical difficulties? Consult the Doctor for an answer. Due to the volume of mail Doctor ASCII receives, we cannot guarantee that your query will be published. Please send a self-addressed, stamped envelope with all letters to Doctor ASCII, c/o HOT CoCo, 80 Pine St., Peterborough, NH 03458.*

**Q.** Occasionally, after turning on my 16K CoCo 2 from a cold start, the computer freezes after a minute or two and the screen fills with garbage. The only way I can regain control is to reset the computer or turn it off and back on again. How can I remedy this frustrating situation?—Wayne Hubert, Duluth, MN

**A.** Sounds like a bad connection. Check that your memory chips are firmly seated and that there are no bent pins. Also, disconnect any peripherals you have attached and try to isolate the problem by plugging them back in one at a time.

**Q.** I want to add a pilot light to my 64K CoCo 2 (a red LED with a 470-ohm resistor). Where do I safely tap into the 5-volt supply?

Also, I sometimes lose control of my computer, whether it is hot or cold. The keyboard does not respond and the reset button does not work. Garbage appears in two vertical columns under the PRINT @ locations 1 and 10. What's the problem?—Paul Hache, Amos, PQ

**A.** Looking from the front of the CoCo 2, the 5-volt is in the upper left corner. Locate resistor R2, a 1/2-watt, 0.1-ohm, series-current limiter color-coded brown, black, silver, and gold. The right side of R2 is a good place to pick off power for your pilot light. C5 is cut out on my CoCo 2, and its right terminal on top of the board is connected to +5 volts; you could solder to this. C5's left terminal is ground.

The most likely suspects of your hangup problem are memory and the SAM chip. Try running a memory-test program. Several diagnostics routines, including a memory test, are provided on Radio Shack's Diagnostic ROM program pack (catalog no. 26-3019), which sells for \$10.95.

**Q.** What type board is in my CoCo 2? How do I get a technical reference manual for it? Can I interface an RGB color board to the CoCo 2 for better resolution? Can you inform me about software suppliers in Europe?—P.T.J.G. Lammers, Hetthuisen, Netherlands

**A.** The CoCo 2 has appeared in three flavors: the original (made in U.S.A.) and two Korean-built versions. Both the original and the first Korean-made versions are similar, and you can upgrade them to 64K using eight 4164 dynamic RAM chips. The latest Korean version uses only two memory chips instead of eight. You could upgrade it using some kind of piggyback board containing 4164s. Radio Shack has not yet made this piggyback, but is replacing the board with the eight-chip version for the upgrade. (Ed. note: See "64K Modification Revisited" elsewhere in this issue for more CoCo

2 upgrade information.) The D, E, and F (or 285) boards apply only to the original, grey CoCos. Radio Shack has changed the CoCo 2's model number with each board change. (See the table below.)

16K Standard Basic	16K Extended Basic	64K Extended Basic
26-3026	26-3027	26-3127 Original
26-3134	26-3136	1.2
26-3134A	26-3136A	1.2.3

1. Made in Korea
  2. New keyboard design.
  3. Uses two TMS4416 16K by 4 RAMs instead of eight 16K by 1's. New SAM chip with 256-cycle refresh instead of the previous 128-cycle version.
- Color Basic 1.3 (Extended Basic version uses one 16K ROM instead of the previous version's two 8K ROMs.)

To order a technical manual for any Radio Shack product, just prefix that product's catalog number with TM—e.g., TM 26-3003.

RGB monitors are generally more expensive, and the low resolution of the CoCo's 6847 VDG (video-display generator) doesn't justify the extra cost. A TV set is adequate except in cases where rfi (radio-frequency interference) is a problem.

Write our advertisers for catalogs and information on overseas orders. If there is a Radio Shack store near you, ask them about their Express Order service.

**Q.** I have never been able to get my C. Itoh 1550B dot-matrix printer to work with my Color Computer. I've been told that my problem is getting the correct hookup between the printer's serial port and the CoCo's. Can you tell me how to do this? I have a Radio Shack cable that is supposed to work, but it doesn't.—Brent Prokopishin, Saskatoon, Saskatchewan

**A.** You have two problems: your cable and your switch settings. The cable you have (catalog no. 26-3014) is for connecting the CoCo to a modem, and the wiring is incorrect for your printer. Also, your printer must have either the RE or RD type of serial interface; the CD interface is a current loop and will not work without a converter between the printer and the CoCo. I've compared the cable you have with the cable you need below.

#### The cable you have:

CoCo (DIN plug)		RS #26-3014 (DB25S)
Signal	Pin #	Pin # Signal
CD	1 > ..... <	8 DSR
IN	2 > ..... <	3 RX Data
GND	3 > ..... <	7 Signal Ground
OUT	4 > ..... <	2 TX Data

#### The cable you need:

CoCo (DIN plug)		C. Itoh (DB25S)
Signal	Pin #	Pin # Signal
CD	1 > ..... <	20 DTR
IN	2 > ..... <	2 SD
GND	3 > ..... <	7 Signal Ground
OUT	4 > ..... <	3 RD

You could modify your cable for the proper connections, or if you are handy you can make your own in one of two ways. First you could buy a DIN to DIN cable, remove one end, and wire it to a DB25P





# A printer impresses the press.

**Read what the experts say about Smith-Corona Dot Matrix Printers.**

## **PC Products\***

"I picked the Smith-Corona D-300 for overall value. It is the fastest in actual use, among the least noisy, and it provides the best flexibility in terms of document printing."

"Programming can also produce near letter-quality print so convincing that it takes a magnifying glass to reveal the individual dots."

## **PC Magazine†**

"The D-300 is the only economy class printer with a wide (15 inch) carriage we can seriously recommend."

"At \$795, the D-300 can't be beat."—John Dickinson

## **Creative Computing:**

"...truly versatile dot matrix printer, the D-300 from Smith-Corona."

"This...workhorse is durable enough for heavy-duty use in the office...its relatively low price keeps it within reach of home users...in addition to its excellent text capabilities, this printer fully supports high resolution graphics printing."

## **Hot CoCo:**

"The Smith-Corona D-300 pulls away from its competition as a near letter-quality printer."

"I find the correspondence print of the D-300 to be the best in its price range."



**SMITH  
CORONA™**  
WE'RE WRITING THE FUTURE.

Smith-Corona is an operating group of SCM Corporation. For more information on this product, write to Smith-Corona, 65 Locust Avenue, New Canaan, CT 06840

\*From a review of the following printers: Epson FX-10, Okidata Microline 83A, Panasonic KX-P1091, Star Micronics Delta-15. †From a review of 31 printers tested, selling for under \$800.



connector. Second, you could make the whole cable from scratch, buying a DIN plug and DB25P connector, and using your own wire. (I recommend #22 gauge stranded.) Here are the part numbers for these:

- RS #26-2014, \$19.95, four-pin DIN to DB25 modem cable
- RS #26-3020, \$4.95, four-pin DIN to four-pin DIN printer cable
- RS #274-007, \$1.49, four-pin DIN plug
- RS #274-1547, \$2.99, DB25P connector
- RS #274-1549, \$1.99, hood for DB25P (optional)

The switch setting indicates that when you turn on your system, the printer is deselected and will not print until it receives an XON character. The printer then prints until it receives an XOFF character. This is known as XON/XOFF protocol. Below is a listing of the

switches. An asterisk indicates that the switch should be changed to that position for the CoCo. A plus sign indicates that this setting is standard as set at the factory. A question mark indicates a recommended change (e.g., slashed zeros are easier to spot when debugging) or that it wasn't clear from the manual, so experiment after you get the printer working. If there isn't an asterisk or question mark, use the standard setting.

**Q.** When I use a 4-foot flat cable with my disk-drive interface, everything works fine. But when I use the cable with the Radio Shack Multi-Pak Interface, the keyboard crashes and garbage appears on the screen. Why?—*William Link, Richfield, NC*

**A.** Not many people have been successful in extending the Multi-Pak via ribbon cable. This method decreases noise immunity and reduces the bus's bandwidth. The E and Q clocks are distorted by capacitors C27 and C28. Also, an additional delay occurs because the data bus is enabled via the PAL chip.

Switch	Open	Closed	Function
1-5	ON +	OFF*	Processing of DC1/DC3 (XON/XOFF) signal
1-6	ON +	OFF?	Line feed when the buffer is full
1-7	CR +	ALL?	Print command (CR, LF, VT, FF, US)
1-8	OFF +	ON*	Line feed after carriage return (CR)
2-1	OFF +	ON?	Print slashed zero
2-2	N +	1	Selection of buffer selection lines
2-3	66 +	72	Top-of-form (TOF) to TOF line length
2-4	1/6 +	1/8	Power-on line-feed pitch in inches
2-5	10 +	Prop	Power-on character pitch (10 cpi/proportional)
2-6	8 +	7	Selection of 7- or 8-bit data
2-7	DE +	SEL*	Selection of power-on deselect/select
2-8	OFF +	ON	Power-on unidirectional printing

**Q.** I bought a game that automatically executes after I LOADM it. How is this done? Can I fix a program to do this without disassembly or patching?—*Warren Barnes, San Jose, CA*

**A.** One way is to put a loader program into the area that Basic uses for the get-next-character routine. Basic doesn't use this area while loading a file, and when loading is finished, Basic will encounter the loading program when it tries to get the next input.

Listing 1, PUTLDR, is a Basic program that will put such a loader in a machine-language disk file. It does not copy the file; it actually modifies it on the disk, so have a backup of the disk before you try it. PUTLDR is a utility that gets the load, end, and transfer addresses of a program and adds or removes the auto-loader from the file. ■

See program listing on page 46


Circle Reader Service card #216

TRS-80+ MOD I, III, COCO, TI99/4a  
TIMEX 1000, OSBORNE, others

## GOLD PLUG - 80

Eliminate disk reboots and data loss due to oxidized contacts at the card edge connectors.

**GOLD PLUG 80** solders to the board edge connector. Use your existing cables. (if gold plated)

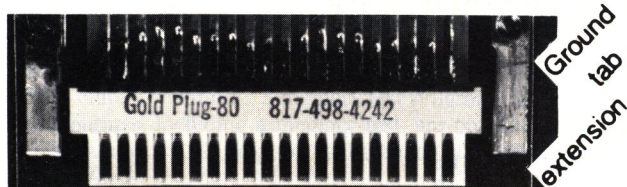

COCO Disk Module (2)	\$16.95
Ground tab extensions	INCL
Disk Drives (all R.S.)	\$7.95
Gold Disk Cable 2 Drive	29.95
Four Drive Cable	39.95

USA shipping \$1.45 Can/Mex \$4.  
Foreign \$7. Don't wait any longer TEXAS 5% TAX

Available at your favorite dealer or order direct from



**E.A.P. CO.**

P.O. BOX 14

KELLER, TEXAS 76248

(817) 498-4242

+ trademark Tandy Corp



MC/VISA



# NumberJack

The HJL Numeric Keypad  
for Color Computers



## Cuts number crunching down to size

Now you can enter and revise data twice as fast in spreadsheets, accounting and other number-intensive applications with the HJL numeric keypad, NumberJack.

### A sleek addition to your personal computer

NumberJack has a streamlined, low-profile ABS enclosure that measures just 5-1/2 x 7-1/2 x 2-1/4 max. The full-travel keyswitches have the same comfortable feel and reliability that have made the HJL-57 everyone's favorite CoCo keyboard.

### Much more than numbers

Besides the ten numeric keys, you get all four cursor keys, Clear, @, decimal point, Comma, Enter, and all four standard math keys.

### Autoshifted Add and Multiply

One keystroke is all it takes to enter the Add and Multiply keys

without shifting. Meanwhile the colon and semicolon are still instantly accessible from your main keyboard. What's more, NumberJack has its own shift key to provide convenient access to all the numeric shifted symbols.

### Quick and easy installation

The completely self-contained NumberJack keypad can be installed in five minutes or less. No soldering, no drilling, and no special tools are required. Comes with complete instructions, a 3-foot plug-in cable and all necessary connectors.

### HJL performance-- You can count on it

Bounce-Proof keyswitches are rated for 50 million cycles per key minimum and mounted on a solid aluminum baseplate. Contacts are covered by a protective membrane to guard against dirt, dust, and accidental spills. The NumberJack is built so well it carries a full,

one-year warranty and the exclusive HJL Products 15-day money back guarantee.

### Works with all color computers

Including Original, F-version, CoCo 2, TDP-100 and Dragon. Some CoCo 2 computers purchased after November, 1984 will require a special adapter (\$3.00); just let us know the model number and we will add it to your order if required.

### Order yours today Just \$89.95

Cut the tedium out of numeric data work. The NumberJack gives your CoCo the input capability of machines that cost hundreds of dollars more.

**Call Toll Free**  
**1-800-828-6968**

In New York 1-800-462-4891



**PRODUCTS**

Div. of Touchstone Technology Inc.  
955 Buffalo Road • P.O. Box 24954  
Rochester, New York 14624

Telephone: (716) 235-8358

Ordering Information: Specify model (Original, F-version, or CoCo 2 model #). Payment by C.O.D., check, MasterCard or Visa. Credit card customers include complete card number and expiration date. Add \$2.00 for shipping (\$3.50 for Canada). New York state residents add 7% sales tax. Dealer inquiries invited.

Circle Reader Service card #8



## The Fifteen Puzzle

**T**he sliding-tile puzzle is a wondrous little gadget whose prime purpose it seems is to keep children occupied on long car trips. It consists of a tray of interlocked tiles with one open square. The object is to reorder the tiles based on one of several themes. Some versions require that you order numbers, others have you arrange part of the alphabet, and still others ask you to correctly spell words or put the elements of a picture in order.

### Another from Sam Loyd

Sliding-tile puzzles derive from the Fifteen Puzzle, an invention of master puzzle maker Sam Loyd. The Fifteen Puzzle is a four-by-four box containing 15 numbered tiles (numbered one to 15) and an empty space. In the 19th century, Loyd offered a \$1,000 prize to anyone who could complete a Fifteen Puzzle that began with the numbers ordered correctly except for the last two (14 and 15), which were reversed. The tiles of the Fifteen Puzzle can be arranged in nearly 21 trillion combinations, and exactly half of them are insolvable. The wily Loyd had figured out an impossible arrangement—his money was safe.

The public paid no attention to mathematicians who published proof that trying to solve that particular arrangement was futile. There were tournaments, newspaper articles, and disappointments. Millions of the puzzles were distributed. Numerous people claimed to have solved the puzzle, but none could remember the moves when tested.

There is a simple rule for determining whether it is possible to solve a given presentation of the Fifteen Puzzle. Start with the first number of the puzzle. Read the puzzle to its end, determining how many lower numbers follow it. Keep a separate running total to which you add a one for every lower number that follows. When you have compared the first number to all the numbers that follow it and added a one to a running total for each lower number, repeat the procedure for the second puzzle number, and so on. If the final total is an odd number, that presentation of the Fifteen Puzzle can't be solved. To make it solvable, exchange any two puzzle numbers.

All the presentations of the Fifteen Puzzle generated by Listing 1 are solvable. To play, type RUN and press the enter key. You slide numbers into the blank space by pressing A for north, Z for south, comma (,) for west, and period (.) for east. Because you can only move into the blank space with one of four numbers, you use the direction key to choose the number or "tile" you want to move. Randomly generated tones sound when you have properly reordered the numbers.

### The Bull's Eye

Listing 2 is called Bull's Eye and goes directly to the heart of the mathematical implications of this kind of game. Its object, to correctly rearrange the picture of the bull's eye, is evident at once, but its solution is elusive.

Start the puzzle by typing RUN and pressing the enter key. (If your computer does not accept the speed POKE 65495,0, delete the command from line 110.) The program presents a three-by-four square arrangement on a field of white with only one empty square. On the left is a large orange circle. In its center is a blue square. On the right is a square containing a small orange box. The object is to insert this last square inside the large circle to form the bull's eye. Press A for north, Z for south, comma for west, and period for east. As with the Fifteen Puzzle, the compass direction you select also indicates the square you have chosen to move into the empty box.

Bull's Eye can be solved in 23 moves. Look for the answer in next month's column. Randomly generated tones, which stop when you press the break key, sound when you have completed the puzzle. To see your score, type PRINT LEN(S\$) and press the enter key. To see the string of all your moves by compass direction, type PRINT S\$ and press the enter key.

### Puzzle Contest II

The puzzle in Listing 3 is called Consarnation. It runs on the MC-10 and the CoCo in Color Basic. MC-10 users, see the change in line 130. To play, type RUN and press the enter key. The program draws a large blue frame that contains an arrangement of blue

squares. Filling out the frame around the squares are single-digit numbers in no particular order. In the northwest corner is a flashing orange cursor. You move it within the frame by pressing A for north, Z for south, comma for west, and period for east. Trying to move into any blue area has no effect.

The object of the puzzle is to move the cursor around the grid in attempt to land on the highest digit possible with every fifth move. The numbers you land on with every fifth move are totaled by the computer as your score. Digits you land on with a fifth move become zeros when you leave them. You are not allowed to double back on a move within a turn.

At the end of 10 turns, the computer displays your final score and answer string. The latter indicates each of your moves by compass direction. To print out the answer string for your high score, type PRINT #-2,S\$ and press the enter key. MC-10 users, type LPRINT S\$ and press the enter key. A good strategy is to plan out your moves in advance in order to score the highest number with each turn. The higher your total score, the better your chances of winning the contest. ■

*Eds. note—To enter Puzzle Contest II, type or print your name, address, highest score, and its answer string on a piece of paper. Mail it to Richard Ramella, 1493 Mt. View Ave., Chico, CA 95926. Be sure to write your score on the outside of the envelope. To be considered, entries must be postmarked by June 30, 1985. The winner will be the entrant who submits the answer string with the highest score. In case of a tie, the winner will be determined in a fair and random manner. The winner will receive a free, one-year subscription to HOT CoCo and the winner's name and score will appear in a future issue.*

See program listing on page 47

### System Requirements

16K RAM

Extended Color Basic



# DIGISECTOR<sup>TM</sup> DS-69 VIDEO DIGITIZER FOR THE COCO



## Give your COCO the gift of sight!

The Micro Works is happy to introduce the newest member of our Digisector<sup>TM</sup> family — the DS-69 Video Digitizer for your COCO. It has all the standard features of its big brothers but comes with a price tag that's right for you.

- **High Resolution** 256 by 256 spatial resolution.
- **Precision** 64 levels of grey scale.
- **SPEED!** 1/2 second for a full screen of video.
- **Compactness** Self contained in a plug in Rompack.
- **Ease of Use** Software on disk will get you up and running fast!



The DS-69 Digisector opens up a whole new world for you and your COCO. Your computer can be a security system, take portraits, analyze signatures, inspect assembly work . . .

the DS-69 is your COCO's eyes. Use the DS-69 and a TV camera to get fast, precise conversion of video signals into digital data.

## Powerful C-SEE<sup>TM</sup> software.

C-See is a menu-driven software package included with your DS-69. It provides high speed 5 level digitizing to the screen, high precision 16 level digitizing for superb hard copy printout, and simple software control of brightness and contrast. Or call our driver routines from your own Basic program for easy 64 level random access digitizing. Pictures taken by the DS-69 may be saved on disk by C-See and then edited by our optional MAGIGRAPH package for enhancements and special effects.



The DS-69 comes with a one year warranty. C-See supports both cassette and disk operation with the Multi-Pak adaptor and requires 64K. Cameras and other accessories are available from The Micro Works. Let your COCO see the World!

- DS-69 Digisector & C-See Software \$149.95
- MAGIGRAPH Graphics Package on disk \$ 39.95

Terms: Visa, Mastercard, Check or C.O.D.

**Purveyors of Fine Video Digitizers Since 1977.**

The **MICRO  
WORKS**

Established 1977

P.O. Box 1110 Del Mar, CA 92014 (619) 942-2400

Circle Reader Service card #196



# The Computer Room

by Scott L. Norman

## True Life Adventures

**W**elcome to The Computer Room. When *HOT CoCo* approached me about doing this column, the editors said they wanted a series that would discuss ways of applying the Color Computer in the home, small business, or other organization. Since that's one of my favorite computing themes, I didn't need much recruiting.

While I'm sympathetic to the needs of the newer user, I'll include enough material on applications of commercial products to appeal to a broader audience. This won't be a hard-core programming column, but I do plan to discuss modifications or additions to existing programs from time to time. I may even slip in a couple of my favorite auxiliary routines for you to incorporate into your own material.

And finally, I hope my discussions of how other CoCo owners have used their machines to solve real problems will encourage readers to do some experimenting on their own.

### Keeping Track of Stuff

Things rarely turn out as we expect. Once, I thought I'd use my Color Computer primarily for data management: organizing facts and figures, and keeping them on file for instant recall. It didn't quite happen that way. One reason was that I found a lot of other things to do with my machine, and another was the unsatisfactory state of early data-handling software. In those days I had to write my own Color Basic programs for a tape system, for Pete's sake.

Commercial software is far better now. Nevertheless, I still find that I don't use data-management programs nearly as often as I once expected. Not that I lack for possible applications; I have more material than ever to organize. It's just that most database managers (the generic term, although few CoCo programs live up to its technical definition) are designed to handle information that's neatly organized. Many are unsatisfactory for quick-and-dirty inquiries into disorganized piles of data—what I call the electronic notebook or “Now what did I do with *that*?” jobs. That's unfortunate, because I carry around a lot of mental data-management baggage of that variety. I could use some help.

I do a lot of writing, so I keep a formal database of manuscript status: When did I submit each piece and to whom, when was it

accepted, what's the status of the galley proofs, when and how much was I paid, and so on. This is a natural application for a personal computer, and I use it as a test case for database managers. It provides a good excuse for a prolonged trial of a different program every year.

It's easy to break the data for each manuscript (or *record* in database jargon) into a series of well-defined items, or *fields*. This is the kind of organization most commercial programs like to see, and most of them do a competent job of managing it. Some are much more convenient in everyday use than others, however. That's important to me. My manuscript file gets a lot of use, and after a while a program's rough spots will come to my attention like a toothache.

A recent romp through my databases reminded me of some of the high and low points of this class of software. It also refocused my attention on the problem of handling unstructured information: I happened to be in the market for a new “casual” data manager at the same time.

I'd like to share some of my findings with you. Please remember that I can only describe what I myself look for in a data manager. I am not usually interested in squeezing that largest possible file into my system, for example; I simply don't use my CoCo for very large databases. What I *do* care about includes ease of retrieving a specified record from a file, and the ability of a program to produce useful reports.

I must also be very selective. Although a reviewer tends to build up a large software library after a while, it's impossible to use everything all the time. I concentrated on just three candidates for my manuscript-tracking chore, and another for my less-structured data. This means that several very decent programs didn't even make the finals; don't take it to heart if your favorite doesn't appear here.

I have reviewed all but one of the following programs at length in previous issues of this magazine, so I feel few qualms about skipping over the nuts and bolts in order to get to the details.

### Pro-Color-File

A class act. Derringer Software's Pro-Color-File (PCF) does a fine job of performing cal-

culations on your data in order to fill out some of the fields in a record. It is also particularly competent at producing complex reports—especially when teamed with its companion routine, Pro-Color-Forms. You should be careful when defining the structure of a PCF file (i.e., the lengths of fields and the types of data they will contain), because once you have begun to enter data, your options for changing a file's setup are very limited. This is true of most CoCo data managers, by the way.

It takes about 50 seconds, plus your own reaction time, to go from startup to PCF's main menu. Human responses come into the picture because the program cannot be set to automatically load a frequently used data file; you must always type the name of the file you want to work with, and you must press the enter key a couple of times to indicate that the correct disk is in the drive.

This isn't much of a price to pay if you use PCF for prolonged sessions, but it can be annoying if you must whip in and out of your data file quickly. As it happens, my manuscript tracking demands this sort of response; I often want to just take a quick peek at the status of one particular piece. For that reason, I hope to have an auto-start modification to report to you in the near future.

In most other respects, PCF does a fine job for me. It is especially good at finding a record on the basis of fragmentary information, since it searches *all* data fields for a target string—the collection of characters you specify. That means I can search for a particular manuscript title, or look at everything I have written for a particular magazine, and so on—a very welcome feature.

### Flexi Filer

This provides a nice counterpoint to PCF. Flexi Filer, by Computerware, offers limited math and searching capabilities but does let you build a convenient self-starting system. You can engage an auto-start option to look for a particular data file whenever you begin the program; it takes only about 25 seconds to get the program and a 50-record file loaded into memory, ready to go to work.

Flexi Filer can only search the first field of each record for a target string. To retrieve a specific record for updating, you must know its location number in the file, and it takes



Prices Change

Every Day.

Please Call

1-800-343-8841

For Lower Prices.

# PRICE BREAKTHROUGH

DEALER INQUIRIES INVITED

Prices Change

Every Day.

Please Call

1-800-343-8841

For Lower Prices.

## MEGADISK™ HARD DISK DRIVE SYSTEMS

TOLL FREE ORDERING 1-800-343-8841

For the { IBM/PC, Tandy 1000, TRS/80 Models I/III/IV/4P, Compaq, Eagle, Sanyo,  
Tava, PC Workalikes, Color Computers, Apple/Franklin, Heath/Zenith, Max/80  
Complete with Hardware, Cables, Software and Quikfit Installation

5 Megabytes Internal Mount	starting at	\$299.95
10 Megabytes Internal Mount	starting at	\$44.95
20 Megabytes Internal Mount	starting at	\$79.95
5 Megabytes External System	starting at	\$499.95
10 Megabytes External System	starting at	\$699.95
20 Megabytes External System	starting at	\$999.95
Streaming Tape Backup System — Internal Or External	starting at	\$499.95

Wow! New Low Price

DOS Systems Available: { IBM/Heath — DOS, 1.0, 2.0, 2.1, 3.0, or later — Apple Franklin — DOS 3.3, ProDOS  
TRS/80-LDOS, TRSDOS 6.x, Newdos/80, Dosplus 3.5, CP/M, COCO DOS, Max/80 LDOS, OS9

FULLY WARRANTIED — PARTS AND LABOR — 24 HOUR SERVICE — CALL TOLL FREE — 1-800-343-8841

## FLOPPY DISK DRIVES, POWER SUPPLIES AND CABINETS

Our Disk Drives are UL approved — Our Floppy Drive Cabinets and Power Supplies are Underwriters Laboratory Listed and have passed the required Federal Communications Part 15 Section B-EMI/RFI tests.

Warranty on all disk drives is one full year parts and labor. Warranty on floppy disk drive power supplies is five (5) years. In warranty or out of warranty service is 24 hour turn-around on all disk drives and power supplies.

### Tandon — Full Height Drives

100-1 Single Sided 40 tk Bare	\$125.00
In Case with Power Supply	166.95
Dual Drives in One Cabinet	326.95
100-2 Dual Sided 40 tk Bare	162.00
In Case with Power Supply	206.95
Dual Drives in One Cabinet	381.95

### Half High Drives

65-1 Single Sided 40 tk Bare	122.00
In Case with Power Supply	156.95
Dual Drives in One Cabinet	306.95
65-2 Dual Sided 40 tk Bare	142.00
In Case with Power Supply	176.95
Dual Drives in One Cabinet	346.95
65-4 Dual Sided 80 tk Bare	162.00
In Case with Power Supply	196.95
Dual Drives in One Cabinet	356.95

### TEAC Half High Drives

55A Single Sided 40 tk Bare	125.00
In Case with Power Supply	166.95
Dual Drives in One Cabinet	316.95
55B Dual Sided 40 tk Bare	157.00
In Case with Power Supply	196.95
Dual Drives in One Cabinet	356.95
55F Dual Sided 80 tk Bare	177.00
In Case with Power Supply	216.95
Dual Drives in One Cabinet	386.95

### Apple/Franklin Disk Drives

35/40 Track in Case with Cable and Software	171.95
Controller Card for Two Disk Drives	46.95
Combination Price for Disk Drive and Controller	196.95

### Commodore Disk Drives

Power Supplies and Cabinets 5 1/4" and Hard Drive Systems starting at 42.00

## COLOR COMPUTER DISK DRIVE SYSTEMS AND ADD IN PRODUCTS

35 Track Single Head Drive with Case, Power Supply, Cable	
Controller, Instruction Booklet, Diskettes	\$244.95
Above with Dual Drives in One Cabinet	499.95
40 Track Dual Head with Case, Power Supply, Cable,	
Controller, Instruction Booklet, Diskettes	289.95
Above with Dual Drives in One Cabinet	429.95
128 Memory Upgrade Kit	129.95
Dual DOS Switch	19.95
With Second DOS System — JDOS, RSDOS, Micro DOS, and Booklet	59.95

## TRS/80 HARDWARE

Model I Starter System — Delivered by UPS	
One Single Sided Disk Drive, Case, Cable, Power Supply,	
TRSDOS 1.3 and Manual	\$195.00
Model III/IV Easy to Install Disk Drive Systems	309.95
Memory Upgrades — 4116 and 4164	starting at 1.50 ea.

ALL IN-STOCK ITEMS SHIPPED WITHIN 24 HOURS. SAME DAY SHIPPING PROVIDED BY REQUEST WITHOUT ANY EXTRA HANDLING CHARGES.

## IBM - PC/XT WORKALIKE

All of our computers have: 8 slot motherboard, 640K, monochrome adapter, 2 parallel printer ports, 130 watt power supply, free software — all with our full warranty.

/PC- 2 Floppy Drives - Monochrome Monitor, MS-DOS Monitor	\$1,895.00
Color system resolution - 720h x 240v, MS-DOS	\$2,295.00
5meg/XTtra - 1 Floppy Drive - Monochrome Monitor, MS-DOS	\$2,045.00
Color system resolution - 720h x 240v, MS-DOS	2,445.00
10meg/XTtra - 1 Floppy Drive - Monochrome Monitor, MS-DOS	2,395.00
XTtra - Color system resolution - 720h x 240v, MS-DOS	2,795.00
20meg/XTtra - 1 Floppy Drive - Monochrome Monitor, MS-DOS	2,695.00
XTtra - Color system, MS-DOS	3,095.00
Internal Tape Backup For Any Of Above systems Add	\$449.95

## PRINTERS

Dot Matrix	
Citizen	\$ Call
Star Micronics	
Gemini X-Series Parallel 120 CPS Near letter quality	starting at \$259.95
Delta 10/15 160 CPS	starting at 424.95
Radix 10/15 200 CPS	starting at 649.95
Panasonic 1090	249.95
Daisy Wheel	
Silver Reed 440 80 Column 12 CPS	315.95
550 132 Column 19 CPS	439.95
770 132 Column 36 CPS	895.00
Olympia 132 Column 14 CPS with Form and Tractor	399.95
Apple/Franklin Printer Interface w/Graphics and Cable	84.95
Printer Cables	starting at 19.95
Printer Paper — Microperf Edge 1000 Sheets	16.95

## ELECTRICAL

Surge Protectors — Line Filters — SL Waber — 6 Outlets with Switch	\$ 39.95
Uninterruptable Power Supplies	399.95

## MODEMS

Volsmodem 300 Baud	\$ 69.95
Signalman Mark X Autodial	123.95
Mark XII 1200/300 Baud Autodial	284.95

## ADD IN BOARDS FOR THE IBM

Multi Function Board Clock 256K, Parallel Port, Serial Port,	
Special Software	\$399.95
Floppy Disk Controller	\$145.00
STB — Rio Plus 128K	299.95
Graphix Plus	283.00
Graphics Plus II	355.00
Serial Port	84.95
Monochrome Board with Parallel Printer Port	210.00
Quadram — Quadboard w/128K	289.95
Quadcolor I	215.95
Quadcolor II	439.95

## MISCELLANEOUS

Diskettes in 10 Pack	from \$ 12.95
Twoprint Switches	from 99.95
Disk Drive Cables	from 16.00
Maintenance Cleaning Kits	12.00
Parallel Printer Buffers 8K	149.95
Floppy Disk Drive Cables	
1 Drive	16.00
2 Drives	18.95
Heath/Zenith 2 Drive Cables — Shielded	24.95

# © 1985 SOFTWARE SUPPORT, INC.

1 Edgell Road, Framingham, MA 01701 (617) 872-9090 Telex-383425

Hours: Mon. thru Fri. 9:30 am to 5:30 pm (E.S.T.) Sat. 10 am to 3:30 pm

SERVICE POLICY — Our Professional Technical Staff Is Available To Assist You Monday Through Saturday.

WARRANTIES — Up To One Full Year Parts And Labor. Floppy Disk Drive Power Supplies — Five (5) Years.

SERVICE — 24 Hour Turn-A-Round On All In-Stock Parts. Dealer Inquiries Invited. Call 617-872-9090

## Toll Free 1-800-343-8841

Please Call For Shipping,  
Handling And Insurance.

Please Call For Our Latest Price Saving Specials.

Not Responsible for Typographical Errors.  
Prices and Specifications May Change  
Without Notice.



# The Master Handicapper™

Series by Professor Jones



## EVALUATES FROM RACING FORM!

Age	Gender	Post (Today)
Class	Jockey (Today)	Post (Last)
Condition	Jockey (Last)	Speed
Consistency	Length	Trainer
Earnings	Time of Year	Workouts

And gives you GRAPHIC REPRESENTATION of finish

## PROGRAM



### GLD. Thoroughbred "Gold" Edition™

A "Full" featured thoroughbred analysis designed for the professional and serious novice.

\$159.95 complete

### EGLD. Enhanced "Gold" Edition™

"Gold" Edition with complete Master Bettor™ system integrated onto the same disk. This powerful program will transfer all horses and scores to the bet analysis with a "single keystroke."

(Master Bettor™ included) \$199.95 complete

### GLTD. Limited "Gold"™

Enables Professional Handicappers to assign specific values to the racing variables "they" feel are important.

#### PROFESSIONAL HANDICAPPING SYSTEMS

%	%	%
Age 5	Consistency 15	Speed 10
Class 15	Jockey 15	Workouts 0
Condition 10	Trainer 5	Time of Year 0
Earnings 5	Post 10	Consistency 5
100%	Is Everything OK (Y/N)	

Create program weight based on a particular track and fine tune it for maximum win percentage. This program is designed for "ease of use". The user needs no programming experience.

(contains Integrated Bettor™) \$299.95 complete

### GD. Gold Dog Analysis™



The only professional dog handicapper on the market, includes:

- 1) Speed
- 2) Post Today
- 3) Kennel
- 4) Post Last
- 5) Distance
- 6) Condition
- 7) Running Style
- 8) Weight
- 9) All new internal weighting
- 10) NEW class indicator

If you are near a greyhound track, you can't afford not to use this program.

\$149.95 complete

(with integrated Master Bettor™) \$199.95

### Limited Dog™ \$299.95



### MHH. Master Harness Handicapper™

Professional software designed to provide a thorough analysis of all trotter and pacer races in North America and Canada. Features:

Class	Post Positions	Time Finish
Driver	Track Conditions	Time Last Quarter
Days Since Last	Trainer	Track Rating
Gender	Time ¼	Temp Allowance

\$159.95 complete w/integrated Master Bettor™ \$199.95

### PPX. Professor Jones' Football Predictor, Prof. Pix™

Complete Football Analysis with Data-Base.

- 1) Overlays
- 2) Point Spreads
- 3) "Super Plays"
- 4) "Over/Under" bets
- 5) Data Base Stats
- 6) Holds "100" teams

Highest percentage of winners 1983

\$39.95 complete

\$99.95 with Data Base Management

### NBA. Basketball™

This data base managed analysis will provide the user with "ALL" betting situations while storing relevant information on the disk.

\$99.95 complete w/Manual \$129.95 NBA/College Version

### LOT. LOTTERY ANALYSIS™

Statistical comparison program designed to detect subtle patterns in winning lottery numbers.

\$79.95 complete w/Manual \$99.95 with Lotto

## BROCHURE AVAILABLE

Send check / money order / VISA / Mastercharge (Include expiration date) to:



TELEPHONE  
(208) 342-6939

Prof. Jones  
1940 W. State St.  
Boise, ID 83702



TERMS: FREE SHIPPING ALL SOFTWARE. Add \$6.00 hardware / \$6.00 C.O.D. / UPS Blue \$6.00 / Out of Country \$9.00 / ID Residents 4% / 3 weeks personal checks / Cash price only, add 2% Visa, MC / Prices subject to change.

IBM, APPLE, TRS-80,  
C-64 AND OTHERS

# The Computer Room

an extra step to find this. There are a good many selection commands for pulling records out of the file, however; it's easy for me to build a separate file consisting of, say, just the reviews I wrote for *HOT CoCo* in 1984. You can specify as many as a staggering 36-selection criteria at once, linked with AND and OR functions.

The program's mathematical abilities are limited to finding the totals of selected columns when you print a report—not much when compared to PCF, but adequate for many needs. By the way, both of these programs make it easy to specify the video screen instead of the printer as the output device, so you can get a quick preview of a report. It is also simple to get a printout of all the information for any single record, without having to define a separate report format.

## Elite-File

A program of surprising flexibility, a few very appealing features, and one or two complexities. Elite-File can deal with files up to 4,000 records in size, although the product of record length and number must always be less than the capacity of a formatted disk—roughly 156K. The program is also able to handle as many as 16 files at once, so you can command it to look through a lot of data when you're hunting for something.

Nice features include the ability to copy a file definition (i.e., the names and lengths of the various fields) from one file to another. I can use that: The easy way to set a year's manuscript file is to copy the definition used for the previous year and start filling in the data.

There a couple of ways to search for a record buried somewhere in a file. You can look for a target string imbedded in any field, or you can specify that the first field of a record be an exact match to your specification. This is usually the faster way to go. Unfortunately, there is no quick-and-dirty way to get a complete printout of a single record when you find it.

In fact, report generation is handled differently from the way it is done under PCF or Flexi Filer. Elite-File does not have a built-in facility for setting up and storing multiple report formats. You must use either its stablemate word processor, Elite-Word, another text processor, or a Basic program to build a "command file" containing the special instructions needed to specify a report's appearance. It is possible to build a report specification at the moment you need it, using nothing but Elite-File itself, but it will not be saved for future use. That gets awkward, unless your reporting needs are awfully simple. It's a pity, too, because Elite-File has enough other bells and whistles to merit serious attention.

## CoCo Cookbook

This product caters to the "electronic scratchpad" market. It requires you to learn

almost nothing about database technology, since the records are not officially divided into fields. You just enter information about a given topic as a chunk of text; you can easily edit a file and retrieve records, but more complicated sorting and report-generation procedures are out. I tend to use this kind of program as a loosely organized reminder of my progress on various personal and business projects: telephone calls made, things to check into, and so on.

It's hard to believe that a product called CoCo Cookbook can handle data management. Well, the fact is that Cookbook is really a general-purpose, free-form data manager at heart; you can think of the jargon peculiar to its recipe-storage application as having been tacked on after the fact. It should be possible to remove all specific references to cooking and thus customize the program, but I'll leave that for a future column.

CoCo Cookbook entries can be as long as 3,040 characters, but the program will only recognize parts of a 45-character title when performing a search. I wish Cookbook had more flexibility, but nothing's perfect. ■

Scott Norman is the manager of solid state science at GTE Laboratories in Waltham, MA, and has been a personal computer enthusiast for five years. Write to him at 8 Doris Road, Framingham, MA 01701.

## Products Mentioned In The Computer Room

Pro-Color-File  
Derringer Software  
P.O. Box 5300  
Florence, SC 29502  
803-665-5676  
64K, disk  
\$59.95

Flexi Filer  
Computerware  
4403 Manchester Ave.  
Suite 102-Box 668  
Encinitas, CA 92024  
619-436-3512  
32K, disk  
\$54.95

Elite-File  
Elite Software  
Box 11224  
Pittsburgh, PA 15238  
412-795-8492  
32K, disk  
\$74.50

CoCo Cookbook  
Computerware  
32K, disk  
\$27.95



**DISK**  
\$44.95

**NEW**

Introducing The "Super Smart"

## DATA PACK II

### TERMINAL COMMUNICATIONS SOFTWARE

Also Supports The PBJ 80 Column "Word Pak", Deluxe RS-232 Pak,  
Parallel Printer Card and PBJ 2SP Pak

#### "FEATURES"

- No Lost Information When Using Hi-Resolution Display On Line
- ASCII Compatible File Format
- Full Text Buffering
- Terminal Baud Rates 300 to 9600
- Automatic Word Wrap Eliminates Split Words
- Full/Half Duplex
- Automatic File Capture
- Programmable Word Length, Parity and Stop Bits
- Save and Load Text Buffer and Program Key Buffers to Tape or Disk
- 9 Hi-Resolution Display Formats, 28 to 255 x 24
- True Upper/lower Case Display
- Kill Graphics Option for an Extra 6K
- Supports Line Break

- Freeze Display and Review Information On Line
- Send Files Directly from Buffer or Disk
- Full Disk Support for Disk Version
- Send Control Codes from Keyboard
- Separate Printer Baud Rates 110-9600
- Display on Screen or Output Contents of Buffer to Printer
- Automatic Memory Sense 16-64K
- 9 Programmable Function Key Variable Length Macro Buffer
- Programmable Prompt Character or Delay to Send Next Line
- Programmable Control Character Trapping
- Programmable Open/Close Buffer Characters
- Automatic Key Repeat For Editing
- Program and Memory Status Displays

**TAPE**  
\$34.95

9 Unlimited  
Variable Length  
Macro Key Buffers

BUFFER  
EDITOR  
Insert, Delete  
Change or Add  
To Buffer

**NEW!!!**

### "The Wait is Finally Over" ANNOUNCING The CBASIC COMPILER

Now anyone can create fast efficient Machine Language Programs  
without the Drudgery of using an Assembler.

**NEW!!!**

CBASIC is a fast Machine Language integer Basic Compiler that can convert Color Basic programs into fast machine language programs. CBASIC features over 100 Basic Commands and functions that fully support Disk, Tape, Screen and Printer I/O, Hi & Low Resolution Graphics, Sound, Play and String Operations just like Color Basic. CBASIC also includes a powerful full featured Basic program Editor using a 51, 64 or 85 by 24 line display. The Hi-Resolution display can be automatically included in your compiled program for enhanced display capability and allow mixed text and graphic displays.

**Graphics Commands:** CIRCLE, COLOR, CLS, DRAW, GET, LINE, PAINT, PCLS, PCOPY, PMODE, PRESET, PSET, PUT, RESET, SCREEN, SET, POINT, PPOINT

**Sound Commands:** PLAY, SOUND

**String Functions:** CHR\$, LEFT\$, MID\$, RIGHT\$, LEN, INSTR, LSET, RSET, TRIM\$, STR\$, STRING\$, INKEY\$, MKNS

**Numeric Functions:** ABS, POS, TIMER, RND, ASC, TAB, CAL, JOYSTK, PEEK, POKE, LOC, LOF, EOF, FREE, CVN, ERR, VARPTR, SWAP

**I/O Commands:** OPEN, CLOSE, INPUT, LINEINPUT, PRINT WRITE, PRINT @, GET, PUT, KILL, CHAINM, FIELD, DATA, READ, RESTORE

**Program Control:** FOR/NEXT/STEP, GOTO/GOSUB, IF/THEN/ELSE, RETURN, STOP, RETI, ON n GOTO/GOSUB, ON ERROR, ON RESET, ON IRQ/FIRQ/NMI, ON OVR/NOVR, EXEC, LET

**Directives:** ORG, REM OR, END, DIM, END, BASE, RAM, ON/OFF, RAM64K, HIRES, GENERATE, DPSET, STACK

**Editor Commands:** LINE EDIT, AUTO EDIT, COPY, MOVE, RENUMBER, AUTO LINE#, PRINTER, LIST, DELETE, SEARCH, REPLACE, BAUD RATE, PRINTER, CBASIC, TAPPEND, SKIP, SIZE, LOAD, SAVE, APPEND, KILL, DIR, and much, much more.

REQUIRES 32K and Disk, 64K recommended


**Introductory Price \$119.00**  
Regularly \$149.00

# HI - RES II SCREEN UTILITY

## NEW IMPROVED VERSION

- UP TO 85 CHARACTERS PER LINE READABILITY
- ADJUSTABLE AUTOMATIC KEY REPEAT
- PROTECT 1-23 SCREEN LINES
- CONTROL CODE KEYBOARD

- FULLY BASIC COMPATIBLE
- DISPLAY FORMATS OF 28 TO 255 CHARACTERS PER LINE
- FULL 96 UPPER/LOWER CASE CHARACTERS
- MIXED GRAPHICS & TEXT OR SEPARATE GRAPHIC & TEXT SCREENS
- INDIVIDUAL CHARACTER HIGHLIGHTING
- REVERSE CHARACTER HIGHLIGHT MODE
- WRITTEN IN FAST MACHINE LANGUAGE
- AUTOMATIC RELOCATES TO TOP OF 16/32K
- AUTOMATICALLY SUPPORTS 64K OF RAM WITH RESET CONTROL
- REVERSE SCREEN
- ON SCREEN UNDERLINE
- DOUBLE SIZE CHARACTERS
- ERASE TO END OF LINE
- ERASE TO END OF SCREEN
- HOME CURSOR
- BELL TONE CHARACTER
- HOME CURSOR & CLEAR SCREEN
- REQUIRES ONLY 2K OF RAM
- COMPATIBLE WITH ALL TAPE & DISK SYSTEMS

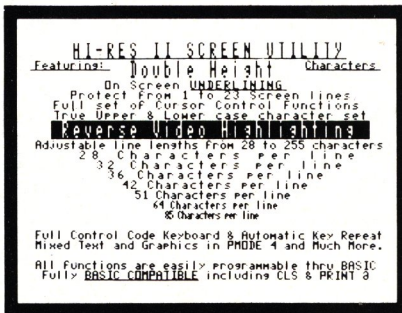

**\$24.95** TAPE **\$29.95** DISK

ALL ORDERS SHIPPED FROM STOCK  
ADD \$2.50 POSTAGE

**CER  
COMP**

5566 Ricochet Avenue Las Vegas, Nevada 89110

**(702) 452-0632**

Circle Reader Service card #335

PROGRAM FEATURES	Program Comparison Chart		
	HI-RES II NEW	HI-RES I OLD	BRAND X
Upper/Lower case characters	Yes	Yes	Yes
Mixed Text and Graphics	Yes	Yes	Yes
Separate Text & Graphics	Yes	Yes	No
Print @ fully implemented	Yes	Yes	Yes
Print @ on all line lengths	Yes	Yes	51 only
Different line lengths	28 to 255 (9)	28 to 255 (9)	51 only (1)
Automatic Key Repeat	Yes	Yes	Yes
Adjustable Key Repeat	Yes	No	No
Auto Repeat Disable	Yes	No	No
Erase to end of line/screen	Yes	Yes	Yes
Home Cursor	Yes	Yes	Yes
Solid or Blinking Cursor	Yes	No	Yes
CLS command supported	Buff/Black	Buff/Black	Buff/Black
X,Y Coordinate Cursor	Yes	Yes	No
Positioning	Yes	Yes	No
Double Size Characters	Yes	Yes	No
Individual/Continuous	Yes	Yes	No
Highlighting	Yes	Yes	No
On Screen Underlining	Yes	Yes	No
Clear Key functional	Clear/L keys	Clear key	No
16, 32 & 64K Supported	Yes	Yes	Yes
Green or Black Background	Yes	No	No
Color	Yes	No	No
Dual Character sets for Enhanced 64 and 85 Characters per line display	Yes	No	No
Protected Screen Lines (programmable)	1 to 23	No	No
Full Control Code Keyboard for Screen control directly from the keyboard	Yes	No	No
Programmable Tab Character Spacing	Yes	No	No
Full Screen Reverse Function Switch to & from the Standard	Yes	Yes	No
16 by 32 Screen for full compatibility	Yes	No	No
On Error Goto Function	No	No	Yes
Extended Basic Required	No	Yes	Yes
All Machine Language Program RAM Required in addition to Screen RAM	2K	2K	2K
Program Price (Tape)	\$24.95	\$19.95	\$29.95



VISA, MASTERCARD AND C.O.D. ACCEPTED




# NEW DISK DRIVES

STARTING AT

## \$129.00

**WITH CASE &  
POWER SUPPLY**


### \$169.95

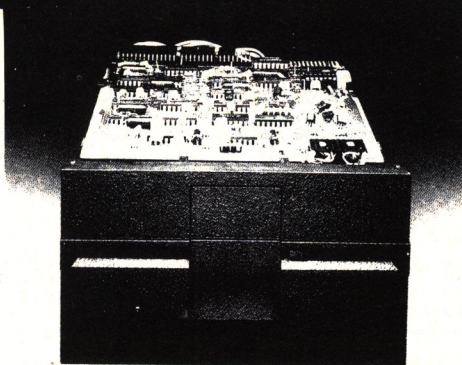

TANDON MPI TEAC

Speed 6 ms tk to tk and up  
Capacity 250k unformatted  
Tracks 40  
Warranty **now 1 YEAR**

New Low Price!



40Tks 6Ms  
Double Sided  
Double Density

40 or 80 Tracks

1/2 Hght. Teac/Panasonic



We carry only the finest quality disk drives • no seconds • no surplus

**SATISFACTION GUARANTEED!!**

ALL DRIVES FULLY TESTED & WARRANTED

Complete Disk Drive with Power Supply & Case ..... Teac ..... \$169.95

Two Drives in Dual Case & Power Supply ..... Teac ..... \$279.95

1/2 ht double sided double density Disk Drives (Panasonic/Teac) <sup>Tracks 40 only</sup> **\$159.00**

1/2 ht double sided double density Disk Drive <sup>Tracks 40</sup> with ps & case ..... \$199.95



How to use your new drive system on audio cassette

Single ps & case \$44.95 Dual 1/2 ht ps & case ..... \$54.95 Dual ps & case ... **Call**

Color Computer Controller (J&M)



**\$129.95**

**DRIVE 0 FOR RADIO SHACK COLOR COMPUTER**

TANDON, MPI OR TEAC DRIVE (SINGLE SIDED 40 TRACKS SPEED 5MS TRK TO TRK & UP)

POWER SUPPLY and CASE, TWO DRIVE CABLE WITH ALL GOLD CONNECTORS

J&M CONTROLLER, MANUAL and DOCUMENTATION ..... ~~\$329.95~~ ..... **\$ SALE!**

BUY THE BEST  
FOR LESS!  
CALL!

**DRIVE 0 FOR RADIO SHACK COLOR COMPUTER**

PANASONIC 1/2 HEIGHT DOUBLE SIDED DOUBLE DENSITY DRIVE 500K unformatted

POWER SUPPLY and CASE, 2 DRIVE CABLE WITH ALL GOLD CONNECTORS

J&M CONTROLLER, MANUAL and DOCUMENTATION ..... ~~\$399.95~~ ..... **Super!! SALE!**

TAKE ADDED SAVINGS ON TWO DRIVE SYSTEMS

DISKETTES with free library case ..... **\$17.95**

Unadvertised Specials ..... **\$Call**

Drives cleaned, aligned & tested ..... **\$29.95**



10 Diskettes

CD CONTROL DATA


TECHNICAL STAFF ON DUTY, PLEASE CALL FOR ASSISTANCE.



**CALL US TODAY!!  
ORDER TOLL FREE**

**(617) 234-7047  
1-800-635-0300**

\* DEALER INQUIRIES INVITED.  
**(617) 234-7047**



**TRUE DATA PRODUCTS**



195 Linwood Street, P.O. Box 546

Linwood, Massachusetts 01525

(617) 234-7047

HOURS MON-SAT 9-6 (EST)

We welcome

- Visa / Master Charge  
- Checks (allow 2 weeks for clearing)
- C.O.D. Add \$2.00


Circle Reader Service card #93



# New Hard Drives

----- COMPLETE SYSTEM ----- JUST PLUG IN -----

**Call For  
BEST PRICE**

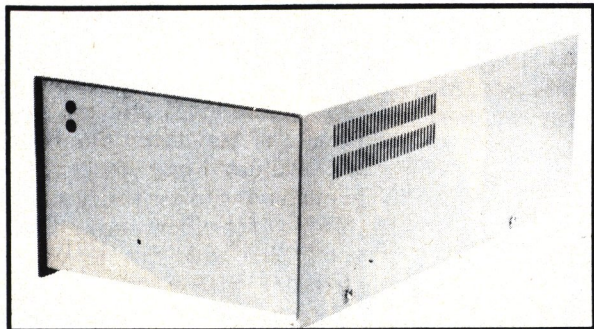

**Warranty - One Full Year**

5 to 20 Megabyte, ready to run on the TRS  
80 Model I/III/IV/4P, color computer,

**64K UPGRADES \$39<sup>95</sup>**

## star


**PRINTERS**

**PRINTER CABLES AND  
INTERFACES AVAILABLE**  
Call for current pricing

- 100 - 120 - 160 CPS
- Bidirectional Logic Seeking
- Friction and Tractor
- 9X9 Dot Matrix
- True Decenders
- High Res-Bit Image Block Graphics

- Super Script-Subscript
- Underlining
- Backspacing Doublestrike
- 5, 6, 8 1/2, 10, 12 and 17 Pitch
- Programmable Line Spacing
- SIX (6) MONTH WARRANTY

**GEMINI 10X** (9 Inch Carriage, 120cps) Friction and Tractor.....\$CALL  
**GEMINI 15X** (15 Inch Carriage, 120cps) Friction and Tractor.....\$CALL  
**DELTA 10** (10 Inch Carriage, 160cps) Friction and Tractor.....\$CALL  
**POWER TYPE** Letter quality

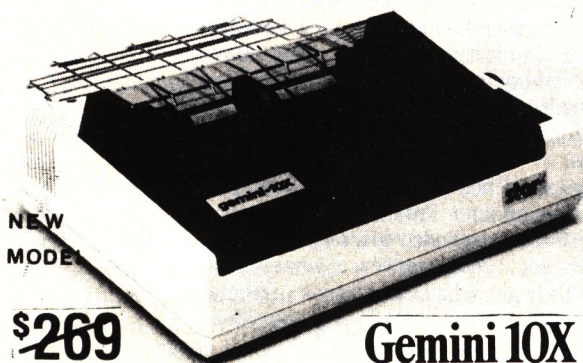

**NEW  
MODEL**


**\$269**

**Gemini 10X**

## NEW QUALITY VIDEO MONITORS

Starting at **\$79.<sup>95</sup>**

**MONOCHROME  
COLOR MONITORS**



### VIDEO DRIVER

ENABLES YOUR COCO TO OPERATE WITH A  
VIDEO MONITOR INSTEAD OF A TELEVISION!

### SCREEN DUMP PROGRAM


The best screen dump program for the Epson & Gemini  
printers ever!! Have the option of standard images  
or reverse w/regular or double sized pictures **\$19<sup>95</sup>**

### SP-3 INTERFACE for Color Computer

- 300-19,200 BAUD rates
- External to printer — No AC Plugs
- Built in modem/printer switch—no need for Y-cables or plugging/unplugging cables

**Only:**

**\$59.95**

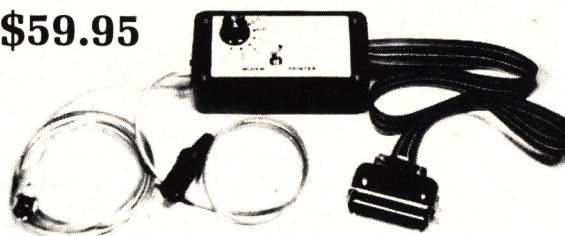

### COMPLETE SYSTEM

**ONLY**

**~~319<sup>95</sup>~~**

**NEW  
LOW  
PRICE**

now  
with  
screen  
dump

**Nothing more to buy!**

Dealer inquiries invited



**TRUE DATA PRODUCTS**

195 Linwood Street, P.O. Box 546  
Linwood, Massachusetts 01525



**CALL US TODAY!!  
ORDER TOLL FREE**

**(617)234-7047  
1-800-635-0300**



# *In Search of 128K*

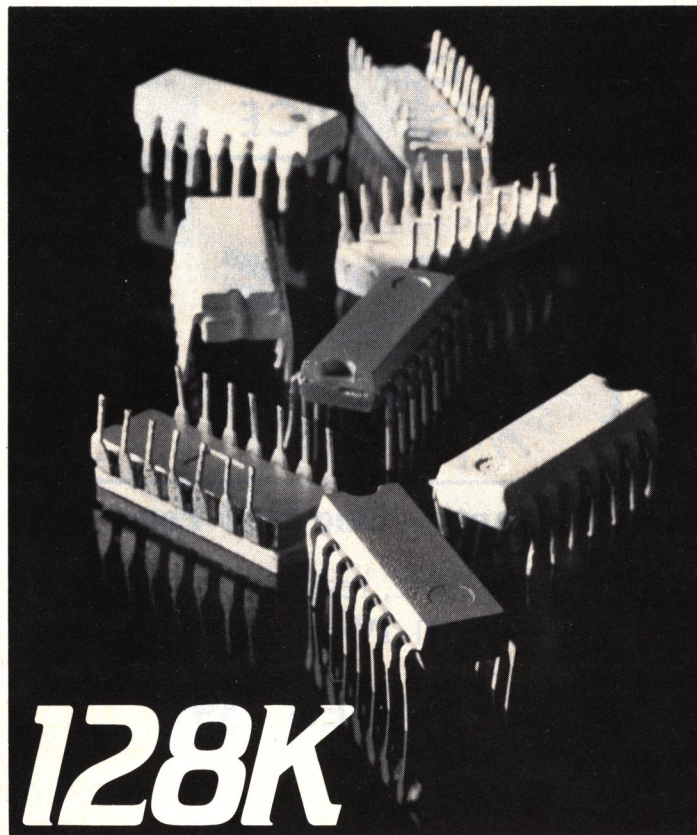


Photo by Edward Justice

*Find out whether one of these two  
memory-expander kits will work for you.*

**O**ver the years, the Color Computer has experienced many significant hardware upgrades. One such upgrade currently making the rounds is memory-expansion kits that increase capacity to 96 or even 128K of RAM. Several brands of these kits have appeared recently on the market, and while they don't increase the space available to individual programs, they do open up a host of interesting possibilities. Memory upgrades let you keep two or three 32 to 64K programs loaded in RAM and ready to go. You can jump from one program to another by flipping a switch or by using one or two Basic commands.

This review describes my experience with expansion kits from Dynamic Electronics and DSL Computer Products. Because their approaches to treating the CoCo's expanded memory resources are different, this should give you a good overview of what is possible in memory upgrades. To begin, let's look at how a machine purported to peak at 64K is manipulated to handle larger blocks of memory.



## The Expandable CoCo

The Color Computer can address only 64K of memory at one time. This limit is imposed by the addressing scheme used in the 6809 microprocessor and its support chips. But its setup still leaves room for invention. The 6883 SAM (synchronous-address multiplexer), which handles communications with the computer's memory, can assign the same addresses to different sets of chips at different times. This "bank selection" technique is the key to the Color Computer's memory expansion beyond 64K.

When the Color Computer is first turned on, it assigns the lower 32K of addresses to RAM. ROMs get 24K of the remainder, even with 64K RAM chips installed. Color Basic, Extended Color Basic, and Disk Extended Color Basic (or a ROM pack) each get 8K. The remaining 8K of address space is unused, except for a small segment assigned to I/O (input/output) devices, such as the keyboard, joystick ports, and so on. This memory setup is called Map Type 0.

You can also program CoCos with 64K of RAM for Map Type 1, which interprets all addresses, with the exception of those vital to I/O locations, as belonging to RAM. The ROMs are effectively switched out of the circuit, although it is possible to copy some of their code to RAM locations if it is needed. Map Type 1 is used by Flex and OS-9, and such popular applications programs as Telewriter-64, DynaCalc, and the VIP library. Perhaps the most exciting aspect of Map Type 1 is that it allows the SAM to handle a second bank of 64K.

The new memory-expander kits consist of logic circuits and additional RAM chips. This extra memory can be applied in two ways. The computer can treat the second bank as independent storage. In this mode an expanded CoCo becomes two 64K computers, although only one can run its resident program at a time. This is the approach taken by the Dynamic Electronics expander kit reviewed here.

The extra memory provided by some upgrade kits is divided into two "pages" or banks of 32K, residing at the lower addresses. It is possible to keep the Basic ROMs active while loading as many as three 32K programs into the computer at once: one in the lower 32K of the original RAM and two more in each half of the additional 64K of memory provided by the upgrade kit. The DSL expander uses this technique.

### Kit Installation

Both of these memory expanders come with all soldering completed, but installation of the kits still requires care and effort. The installation procedure for Dynamic's ME-128-64, described here, is similar to that of DSL's 128K the Easy Way. First you remove 10 of your CoCo's ICs (integrated circuits): eight memory chips, the SAM, and one of the two PIAs (peripheral interface adapters). Eventually you reinstall these in new sockets that ride "piggy-back" on additional chips (including a complete bank of RAM) plugged into the computer's circuit board. For the Dynamic, you must also drill a hole in your CoCo's case to install the bank-selection toggle switch.

The most difficult task for nonhobbyists is likely to be the removal of the 40-pin SAM and PIA. There isn't much room to maneuver your tools; factory-installed ICs of this size tend to fit very snugly. I found it necessary to use a hobby knife followed by a thin screwdriver to open a little space between the chips and their sockets. Then I used a tweezer-style IC puller to extract the chips with a rocking motion while steadying the printed-circuit board with my free hand.

The 16-pin RAMs are easy to remove by comparison. Although the instruction sheet doesn't point this out, it is a good idea to observe the usual precautions against static electricity, which

could harm your computer. Touch a grounded metal object before handling your chips. When you have pulled them out, keep them on a conducting surface, such as a sheet of aluminum foil.

When you have removed the original chips, insert the 10 new IC/socket assemblies. These chips plug into your board, and your original chips plug into them. A little care is required to ensure that they are properly oriented and that all the pins make contact with their sockets. Then you install the bank-selector switch (on the Dynamic ME-128-64) and replace the PIA and SAM. Dynamic recommends testing the new memory bank at this point, before you replace your original RAM chips. When you turn the computer on, only one bank will be properly initialized. It is necessary to throw the switch to the other side and press the reset button to initialize the second bank.

Dynamic offers a solution for purchasers whose nerve fails them; the company will do the upgrade for a modest fee. It is also possible to arrange for the loan of a computer while yours is in the shop for this modification.

## The Dynamic ME-128-64

When you have concluded the installation, how do you use your 128K CoCo? The toggle switch provides one method for skipping between programs in the two memory banks. The Dynamic Electronics documentation also includes two POKEs that you can insert in Basic programs to perform the same function. The switch has a middle position that you use when you are running under program control.

Whenever you change banks, the program that was running is suspended, the values of all variables and pointers are saved, and the original RAM is placed in a reduced-power mode (drawing only about 10 percent of the power it normally uses). My E-board CoCo tends to run warm because of its many modifications, but I don't think the addition of the ME-128-64 has added any noticeable heat load.

The toggle switch is less reliable than POKE statements for transferring control, at least on my CoCo. The toggle works successfully several times in a row and then hangs up on the next attempt for no apparent reason. Bill Chapple from Dynamic Electronics acknowledges that the switch is probably susceptible to contact bounce—microscopic oscillations that can occur whenever a mechanical contact opens or closes.

Contact bounce is often interpreted by high-speed digital electronics as many closely spaced operations of the switch, and it is possible that the CoCo's circuitry can be fooled at some critical point. There are some simple ways of "debouncing" a switch through circuitry, but these methods are not incorporated in the current generation of 128K expanders.


The ME-128-64 was designed and tested for use with two copies of Cognitech's Telewriter-64 working on two different text files. I have switched banks from this configuration dozens of times without encountering a problem. Although this is a useful setup for me, it is specialized, and not for everyone. There are also some restrictions to the way you can switch memory banks. Dynamic has not tested the compatibility of the ME-128-64 with many other commercial programs. A fair amount of trial and error is necessary to see if two applications routines will run side by side.

Because the Color Computer has only one video-display generator chip and only one SAM to drive it, it does not let you pass control successfully from one bank to another unless both programs are in the same display mode. In other words, you cannot switch from a 32-column by 16-row text screen to high-resolution graphics. If you try to do so, the screen displays a meaningless pattern, and both programs are apt to hang up. It is usually safe to make a switch if both the active program and the one on standby



# ((( ))) CoCo Tuner™ ((( )))

**An easy-to-use tuning instrument  
of unbelievable precision**

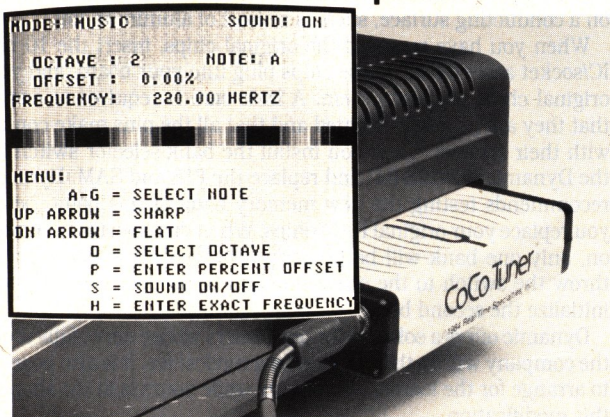

*Actual Display*

- Tunes like a Strobotuner\* at a fraction of the cost!
- Both generates pitch and measures pitch.
- Real-Time strobe pattern displayed on screen.
- Full 7 octave range, including sharps & flats.
- Accurate to .003% \*\*.
- Extremely friendly user interface.
- ROM pack works with any Color Computer.
- Accepts standard 1/8" microphone plug.
- Percent offset and direct frequency selection available.
- Optional piano tuning kit available — (professional tuning wrench, 4 mutes, 1 felt muting strip, and "How To" booklet).

**Send or call for more information.**

Circle Reader Service card #55

\* Strobotuner is a trademark of C.G. Conn, Limited  
\*\* with internal oscillator trimming.



**Mail To: Real-Time Specialties, Inc.**  
6384 Crane Road,  
Ypsilanti, Michigan 48197

**or call: (313) 662-6671**

Shipping: add 2% UPS ground, 5% air or Canada.  
Sales Tax: Michigan residents add 4% Sales Tax.

- |   |      |
|---|------|
| <input type="checkbox"/> CCT-1 CoCoTuner Module & Manual .....                          | \$89 |
| <input type="checkbox"/> CCT-2 Microphone with 6' cord .....                            | \$14 |
| <input type="checkbox"/> CCT-3 Piano Tuning Kit<br>(wrench, mutes, felt, booklet) ..... | \$27 |

Shipping & Tax .....

**Total** .....

☐ VISA    ☐ MASTERCARD    ☐ check

Card# \_\_\_\_\_ Exp. \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Signature \_\_\_\_\_

are performing similar display operations at the time the transfer is made. But in truth, even this is not enough to guarantee success.

A few combinations of commercial programs work well together on the ME-128-64, and others just don't seem to get along. I was disappointed, for example, to discover that Telewriter and DynaCalc won't work together. Even though both programs use a 51-column by 24-line display, I can find no way to leave the spreadsheet and get into the word processor's edit mode.

However, Chapple promises that he will explain in an upcoming issue of his newsletter how to pass variables between two Basic programs in the ME-128-64's separate banks of RAM. (The technique involves reconfiguring the PIA chips for output, a state in which they retain data that is POKED into them.) That should make the ME-128-64 more valuable to the do-it-yourself programmer.

## DSL's 128K the Easy Way

DSL's memory-expander board is called 128K the Easy Way. The first step in the installation of this board is removing the CoCo's SAM chip and reinstalling it on a small printed-circuit board that plugs into the original SAM socket. Then you remove the original 64K RAMs and reinstall them piggyback on the new set, just as for the Dynamic Electronics kit. Two clip-on leads connect the new SAM board to a pair of pins on one of the RAMs.

DSL's 128K the Easy Way does not use a toggle switch for bank selection. You use POKE commands to switch in and out of memory segments. The new RAM is divided into two pages, each of which occupies the lower 32K of the CoCo's address range. These are designated by DSL's documentation as Page 1 and Page 2. The bottom half of the original 64K, the work space normally available in Basic, is called Page 0.

With this system there is a fourth 32K memory segment, the "high RAM," which is normally unavailable to the CoCo's Basic because it occupies the same space address as the ROMs. This space is accessible with the DSL kit and can be used to hold a control program or a copy of the Basic ROMs. The 20-page instruction booklet that comes with 128K the Easy Way includes Basic and Assembly-language versions of a page-changing routine that takes care of all bookkeeping chores, such as clearing space for strings and arrays and setting stack pointers for the various pages.

Like the Dynamic Electronics kit, 128K the Easy Way will find its niche initially with experienced programmers. Some commercially available software can capitalize on the new memory; the Star-DOS and XEX operating systems already work on the DSL product. And there is other software for 128K the Easy Way under development, including new basic interpreters, a word processor, and a database manager. People who want to write 128K software are invited to contact Dennis Lewandowski at DSL. The company is also publishing *The 128K Newsletter* selling at the subscription rate of \$10 per year. Included in upcoming issues is an explanation by Dennis Derringer of Derringer Software on how to make Pro-Color File work on 128K the Easy Way. ■

The ME-128-64 is manufactured by Dynamic Electronics Inc., P.O. Box 896, Hartselle, AL 35640, 205-773-2758. The company offers several models to cover all the board versions of the Color Computer ranging in price from \$129 to \$189. Dynamic's 96KX, not reviewed here, uses another method to give you extra memory and costs \$59 (\$49 in cartridge form). The 128K the Easy Way kit is manufactured by DSL Computer Products Inc., P.O. Box 1176, Dearborn, MI 48121, 313-582-8930. Models are available to fit all 64K CoCos and the CoCo 2 for \$99.



# Reviews

edited by J. Scot Finnie

Ed. note—In keeping with HOT CoCo's new appearance, our review-rating system has undergone an overhaul to standarize reviewers' assessments. We have reduced the number of ratings from ten to six and given each a short description. The change is meant to make the reasoning behind ratings clearer for readers and reviewers alike. We have also added overall ratings to sum up our reviewers' impressions. Overall ratings are an average of the ratings for all the categories rounded to the nearest quarter of a rating point. The table below defines the new rating system.

## HOT CoCo's New Review Ratings

6	Unsurpassed
5	Excellent
4	Above Average
3	Acceptable
2	Needs Improvement
1	Unsatisfactory

## Contents

<b>Star Trap</b> .....	<b>34</b>
<b>Color Computer Graphics</b> .....	<b>35</b>
<b>Edittron</b> .....	<b>35</b>
<b>Side Wise</b> .....	<b>37</b>
<b>Dual DOS Card</b> .....	<b>39</b>
<b>Zookey</b> .....	<b>72</b>
<b>CoCo Logo</b> .....	<b>73</b>
<b>The Sound/Speech Cartridge</b> .....	<b>73</b>
<b>T/S Edit</b> .....	<b>76</b>

## Caught Up in Star Trap

by Richard Ramella

	graphics	sound	playability	documentation
6				
5				
4				
3				
2				
1				
<b>OVERALL RATING 4.75</b>				
Games				

When I was a child I saw a carom board game advertised as "100 games in one." It cost \$10, which works out to only 10 cents a game. I sent for it and was not disappointed. It had checkers, chess, tiddly winks, carom billiards, puzzles, shuffleboard, and more. And it was based on little more than 80 game pieces and my imagination.

Star Trap's spirit of inventiveness evoked the memory of that carom board game when I sat down at the CoCo with my children to play it. Star Trap has some important basic features, including a maze, moving pieces, and sound keyed to game events. The most interesting feature of this program, however, is that it gives you numerous games in one. Players can change play levels, maze size, speed, among other parameters, and design their own mazes. I highly recommend the game for its intended audience, ages 7 and up.

Radio Shack calls Star Trap a "cooperative/strategy" game. It is a product of Radio Shack and the Children's Computer Workshop, an offshoot of the Children's Television Workshop, producers of *Sesame Street*. The

game is not based on a violent premise. The object is to trap the star so that it can't move, not obliterate it. Two joystick-equipped players can work cooperatively to catch the star, rather than competing—a fresh approach.

The rules might seem complex at first, but children make early, satisfying plays without much knowledge of what to do. In time, they learn the finer points of play, too. The instruction booklet is very good; young children find it easy to understand. In the back of the booklet there are suggestions for non-computer activities with mazes, including blindfold travel of a labyrinth made of paper towels and a board-game version of a game called Fox and Geese.

The essence of Star Trap is a star on the loose in a maze. Players control a graphic symbol, which they use to pursue and trap the star. Two players can win by trapping the star between them. The graphic symbol can also leave a single X or a trail of Xs behind it that impede the constantly moving star. Other features of the maze are available through menu selection or in the higher levels. There are several gates that confer a new status on the star and the graphic symbol as they pass through them. Included among these are speed gates, slow gates, jump gates, invisible gates, and magic gates. The wily star is fast and can be tricky to catch. It amuses kids because it seems to take on its own personality.

If players tire of the form of the maze, they can set their ideas in motion by using a simple maze-building menu. You can set the maze to a small, medium, or large size. It can



An Introductory-Level Screen on Star Trap

be black, green, or white. It's possible to set the star and graphic symbol separately at one of three speeds. Star Trap lets you combine five kinds of gates in any order. Play takes on a new look without maze walls. The total number of game variations possible in Star Trap is 124,416.

The 9-year-old member of my family test panel has played Star Trap daily for more than a week. To me this is a sure sign that Star Trap, like my old carom board game, passes the amortization test: Cost ÷ Number of Plays = Value. ■

Star Trap is packaged by Tandy Corp. (Catalog No. 26-2510), 1400 One Tandy Center, Fort Worth, TX 76102. It requires 16K, Extended Color Basic, and is available on cassette or disk. It sells for \$19.95.



# Monitoring The TV Buff IIc

by Gary W. Clemens

	construction quality	documentation	set up	performance	ease of use
6					
5					
4					
3					
2					
1					
<b>OVERALL RATING 4.50</b>					
Hardware					

**T**V Buff IIc is an adapter circuit from Green Mountain Micro that you add to your CoCo in order to use a color or monochrome composite-video monitor. The monitor adapter is designed to intercept the video signal generated by the computer before it is converted to the RF (radio frequency) signal used by a television. The product lets you connect a monitor to your CoCo for a clean, interference-free picture that is far superior to its TV counterpart.

TV Buff IIc is made up of a small circuit board with eight color-coded wires and a ground wire. The circuit board has double-stick tape on its bottom to make mounting the card inside the computer easy. Although its advertising doesn't mention it, TV Buff IIc requires you to solder its wires to components inside the computer. You must also obtain a connector (most CoCos need a female phone plug, such as Radio Shack part number 274-337) and solder it to one of the wires. If you decide to install sound, you'll need a second jack.

You can set TV Buff IIc to use either a monochrome or a color monitor when you install it, but it can't be set for both at the same time. The video driver does allow simultaneous use of the TV and monitor outputs. You can get sound with TV Buff IIc through the cassette port or by hardwiring it for permanent installation.

## Set Up

The installation procedure for this video driver is not complicated. However, because it requires soldering to components inside the Color Computer, you must be careful. If you have not used a soldering iron in electronics projects before, you should find someone to help you. You'll find that an extra pair of hands can be a real help.

Most of the soldering for TV Buff IIc's installation is done on the VDG (video display generator, part number MC6847P) chip, which you could damage accidentally if you are careless. The other items that you must solder are the output jacks and a ground point on the computer's circuit board. The instructions tell you to solder seven of the nine wires to the VDG, one to the output jack, and one to a ground point. For a permanent sound installation, you need to solder a capacitor between chip U3 and an output jack.

The instructions direct you to remove the VDG chip from its socket before you start soldering. This works fine for the earlier production models of the CoCo and CoCo 2 but might not be possible with newer versions, some of which have most of their components soldered into place. Green Mountain Micro needs to update TV Buff IIc's documentation to cover this possibility.

The last step in setting up TV Buff IIc is to run the output lead or leads outside the CoCo's case. The way you accomplish this depends for the most part on the size of the wires and jacks you select. I filed a small notch in the top of the computer's cover. But another method calls for a small diameter wire that you squeeze through the existing notch for the TV jack.

## Documentation

TV Buff IIc's instructions guide you through the installation procedure step by step. Because you must choose between monochrome or color installation, the instructions provide you with guidance on each choice.

TV Buff IIc comes with seven pages of instructions. Three pages cover installation, two provide troubleshooting tips, and one has additional notes that discuss specifications, adding sound, and using surplus monitors. A separate page has a component layout and schematic diagram of TV Buff IIc. These instructions are excellent. They are easy to understand because they are not filled with technical jargon.

One shortcoming of the documentation is that it glosses over the instruction for installing sound. The sound section needs to be expanded to clarify, for example, how you use the cassette output to get sound. Connect the plug that normally goes to the auxiliary port of the cassette to the audio input of the monitor—not the cassette.

Customer support is an important part of any purchase. Green Mountain Micro gets high marks in this area. I had a question about the installation. When I called the company, I got the answer I needed from the first person I talked to, without a run-around or a hassle.

## Ease of Use

Most TV Buff IIc owners will find that using the adapter once they have installed it is as easy as turning on their CoCos. If you have both a color and a monochrome monitor and want to switch back and forth, however, the changeover is difficult. You have to open up the computer and switch back and forth between the MC1372 chip and a resistor on the adapter board.

TV Buff IIc is a well-made piece of equipment. Its components are solidly attached to the board and loosen only with the application of determined force. One point to weigh before you buy TV Buff IIc concerns repairs

to your CoCo. If you ever need to return your computer for servicing, you will have to unsolder and remove the adapter and reinstall it after the repairs have been completed.

## Performance

The most important aspect of a video driver is how it measures up on your monitor's screen. I used TV Buff IIc with monochrome and color monitors and got surprisingly different results.

TV Buff IIc's monochrome quality was not as good as I expected. I compared the text output to that produced by other adapters on a brand-name, medium-resolution monitor with a well-known word processor in 50-, 64-, and 85-character modes. The characters that TV Buff IIc produces are fatter, and as a result, somewhat harder to read than those I have found with other adapter products. Nevertheless, the picture quality is plainly better than that of a good TV. My impression is that the picture is overdriven, but I couldn't discover any way to correct the problem.

The color-monitor mode produced different results. Because text is not the best application with which to judge color, I looked at more colorful applications. I preferred the TV Buff IIc with a color monitor to some other monitor adapters I've seen. The colors on the low-resolution color monitor I used were vivid and sharp, without any blotchiness or bleeding. The picture quality of TV Buff IIc with the monitor mentioned above was far superior to that of a color TV.

Neither the color nor the monochrome installation of the TV Buff IIc showed any signs of snow, ghosting, line interference, motor noise, or any of the many other problems associated with the use of a TV and a computer. The sound quality was consistent with what you normally hear from a TV. A minor note: I found that shielded cables aren't necessary for the video output. A good-quality unshielded patch cord works fine.

## Summary

The TV Buff IIc is a good product. If you don't anticipate needing both monochrome and color output, it will serve you well. Although installation of TV Buff IIc is more difficult than that of some other video adapters, it is also more permanent. That can be an advantage. Some other adapters leave you wondering whether their connections are really tight enough. If you plan to do a lot of word processing on a monochrome monitor, check into another video driver. But if you are looking for a reliable video driver for your color monitor, this might be the one. ■

*TV Buff IIc is manufactured by Green Mountain Micro, Bathory Road, Box R, Roxbury, VT 05669, 802-485-6112. It sells for \$19.95 plus \$2.50 for shipping.*



# On Color Computer Graphics

by Richard Ramella

	organization thoroughness	production readability	quality
6			
5			
4			
3			
2			
1			
OVERALL RATING 5			
Books			

**B**ill Barden, author of *Color Computer Graphics*, is the Color Computer's premier programming writer. When he shares his knowledge, beginners and experts alike learn new programming methods for the CoCo. *Color Computer Graphics* upholds this tradition. I recommend it to Color and Extended Color Basic programmers working at any level.

*Color Computer Graphics* provides the beginner with graphics essentials in sections that improve on the Color Computer's manuals. It lures the advanced programmer into experimentation. The best aspect of the work is its numerous short listings, which provide illustrative results after just a few moments of typing. The effect for those who work through the text in a thoughtful and open-minded manner is a transformation from beginner into technical expert.

Barden's writing style is light-hearted and informative. His humor is disarmingly

corny, as in the first chapter's claim that the book has a sequel titled *The Color Computer Meets the Mad Scientist*. This is writing in the tradition of David Lien's "classic" *TRS-80 User's Manual for Level I* on which many programmers cut their teeth in the late 1970's.

*Color Computer Graphics* has two sections. The first covers how to use graphics commands and the second explores programming techniques. The book also has a slick four-page center section of color screen photos showing results from listings given in the book. Barden has something for everyone. He does not, for example, skim over Color Basic, but covers it thoroughly in its own chapter. And he explains Extended Color Basic graphics methods so that almost everyone can understand them and begin using them creatively.

*Color Computer Graphics* has new ideas, such as if you create a circle with a large enough radius in Extended Color Basic, it flattens against the boundaries of the screen—making a box with a short command. The book's many interesting pointers include how to display extra colors in otherwise color-limited modes; how the draw command can give you many unusual shapes without using much memory; how to use serigraphic modes, the best of which lets you POKE eight colors into a 64-by-192 pixel resolution; how to produce precise rounded shapes with short commands.

I have only one quibble with *Color Computer Graphics*—it was written backwards. It should

start off with Color Basic and move into Extended Color Basic so that it is easy for beginners to follow. Instead, it begins with memory mapping, important theory but not the first concern of a beginning programmer. It moves from there into serigraphic modes, some of which the author mentions are there only to amaze. He even recommends that readers skip to later chapters if they lose interest in the first few chapters. Despite this shortcoming, the chapters themselves are well organized.

Be warned that no amount of technical expertise can turn anyone into a creative programmer. Barden shows you the fundamentals; it's up to you to find creativity by discovering how to combine graphics commands to create colors, shapes, and movement. *Color Computer Graphics* contains insightful tips and explanations throughout its many chapters. If you use this book to learn the essentials, the applications and execution will fall into place. ■

*Color Computer Graphics* was written by William Barden, Jr. and is published by Tandy Corp., Fort Worth, TX 76102, 1982, softcover, 237 pp., \$5.95.

## Meet Edittron

by Scott L. Norman

	ease of use performance	documentation error handling	
6			
5			
4			
3			
2			
1			
OVERALL RATING 4.50			
Application Software			

**I**t takes only a little program writing and debugging to make a believer out of you: Extended Color Basic's built-in line editor isn't ideal. Once you have worked with a word processor or other full-feature applications program, you become accustomed to the joys of full-screen editing, such as the ability to move the cursor freely over a screen

of text, making changes wherever needed. The CoCo's standard editor limits you to working on a single program line at a time and could require you to specify a line number several times if major changes are needed. It is no surprise that one of the most popular accessories for programming in Basic is an enhanced editor.

Vidtron's Edittron is one. It offers 3K of machine language that you can load into any convenient spot (usually at the top of whatever RAM you have available) and put into action or sideline as you require. It might not be the most powerful program editor around, but it is simple to learn, and it works well.

The disk version reviewed here contains five copies of Edittron, any of which could be copied on an application disk. The stock program loads into RAM starting down at address \$E00, putting it into conflict with

Extended Color Basic's high-resolution graphics pages. Because it is written in relocatable code, however, it is easy to specify an offset when loading Edittron. The manual tells you how to do this. Owners of 64K machines have to use one of the map-changing utilities that copy the Basic ROMs into high RAM first.

The program that you want to edit must be in RAM before you can start Edittron. The documentation recommends loading the utility first, followed by the Basic program, and then typing the EXEC command to get Edittron running. You can use it as a programming editor when entering a new program from scratch if you resort to the following trick. Load Edittron as usual, then enter a dummy one-line Basic "program." Anything will do; the manual recommends that you type the line 10 A for simplicity.



Then you can type EXEC and go to work.

## The Workings of Edittron

Edittron has two major modes of operation. The cursor-control mode comes up when you start up the utility. (You can return to Basic with the shift-clear key combination and restart Edittron with the EXEC command.) The commands in this mode move the cursor around a listing. You can use them to move in all four directions, scroll forward or backward by a screen at a time, go to home position on the current screen, and jump to a line number you specify or the top or bottom of the code. Each cursor-control command requires a single keystroke (except those that control scrolling by screens). The utility also gives you auto-repeat.

The search-the-line command finds the next occurrence of a character in the line on which the cursor is resting currently. The find-a-string command locates any combination of eight or fewer characters. It starts its search on the line below your current program line and continues through the end of the code. You use the find-a-string command in conjunction with the repeat-find command, a feature found in many word proces-

**"Edittron turned out to be the ideal tool for editing the DATA statements in my personal-finance program."**

sors, to locate multiple occurrences of a character string. This is handy if you want to change the name of a variable wherever it appears in a long program. This command combination identifies only the first occurrence of your search characters on each program line. Examine complex program listings carefully.

The cursor-control commands are fine for when you just want to nose around the code, but suppose you want to change things? Edittron's other mode, screen-editing, offers 10 helpful commands. Six of these use only a

single keystroke each, and the other four use two-keystroke commands. The six single-keystroke commands let you change, insert, or delete characters within a Basic line and extend, remove, or move a line by assigning it a new number. The last command is the only one that gives you direct control over line numbers. You can't tinker with a line number by means of the character-changing command, for instance. That would probably play havoc with some of Basic's pointers.

The remaining screen-editing commands are "line oriented" instead of "character oriented." They allow you to split a single program line into two consecutively numbered segments, copy a line to a new location, merge any two consecutive lines, or automatically number new lines as you enter them.

## Summary

Edittron runs smoothly. Its ability to make numerous changes to a line of code without having to leave the editor and retype the Edit command, a common occurrence with Color Basic, is welcome. It is true that you must sometimes use several Edittron commands to get the job done, and you must return to Basic to save any modifications you make,

Circle Reader Service card #70

### Sugar Software

Tim's Utility	11.75
Rainbow Screen Machine	22.75
Super Screen Machine	33.75
Auto Run	15.75
Semigraf 32K	15.75
Tim's	20.75
Tim's Mail	15.75
Bible Stories	21.75
Great U.S.A.	15.75
Prereader	15.75
Presidents of the U.S. 16K	19.75
Flying Tigers 16K	19.75
Syntax Stories	8.75
Silly Syntax	16.75
Radio System Design	22.75
Co-Co Calligrapher 32K	19.75
Statgraf 32K	20.75

### Mark Data

Trekboer 32K	19.75
Tut's Tomb 32K	19.75
Time Fighter	19.75
Glaxons	19.75
Shenagians 32K	19.75
Sea Search 32K	19.75
Calixto Island 32K	19.75
Black Sanctum 32K	19.75
Zokey Typing Tutor	19.75
Super Bug	23.75
Super Screen	23.75
Easy File 32K-Disk	47.75
Accounting System 32K-Disk	79.75
Order Entry System 32K-Disk	79.75

## Quality Software At Discount Prices

### Prickly-Pear Software

To Preserve Quantic 2 Disks-32K	29.75
Gravitor	18.75
Complete Enchanter 32K	18.75
Viking II 32K	18.75
Color Disk Trivia	22.75
Question Disk - Choose From History • Science & The World Movies & TV • Sports The Written Word	14.75
Question Disk - When Purchased With Game	7.50
Travelin' Toad 32K	18.75
Ockywocky 32K	18.75
Light Runner	18.75
Jumbo Jet	18.75
Fantasy Gamer's Pack	22.75
Adventure In Wonderland 32K	18.75
Decipher	18.75
Erland 32K	18.75
Flight	18.75
Gangbusters	18.75
Monsters & Magic 32K	18.75
Naked Gamer	18.75
TeeOff	18.75
Viking	18.75
Tape To Disk	18.75
Varalyzer 64K	18.75
Oracle II Tape	26.75
Disk Zapper 64K	26.75
Clone Master Tape-32K	29.75
Color Kit	26.75
Tape Omni Clone Tape	22.75
Super Scroll 64K	18.75

### Prickly-Pear Software

AIRNAY Disk Only	75.00
Rom Free 64K	18.75
Modem Master 16K	18.75
Liz Pack 32K	145.00
Statistical Analysis 8 Disks	
Family Income Organizer (Disk)	22.75
Colorcal	18.75
Super Astrology 32K	18.75
Music Reader	26.75
Phonics 1 or 2 (Tape Only) Each	18.75
Prereader 1, 2 & 3	18.75
Spelling	37.75

**Tom Mix Software**  
**Take 10% Off These Prices!**  
Through 5/20/85

Sailor Man 64K	23.75
Worlds Of Flight 32K	23.75
Chambers 32K	19.75
Warehouse Mutants	19.75
Draconian 32K	21.75
Quix 32K	19.75
elec*TRON	19.75
Space Shuttle 32K	22.75
SR-71 32K	22.75
Touchstone 32K	21.75
Cu*Ber 32K	21.75
Buzzard Bait 32K	21.75
Vocab. Mgmt. System	31.75

**Saguaro Software**  
See Our Other Ad  
In This Issue

### Petrocci Freelance

Guillotine	7.75
Alphabet Song	8.75
Chalkboard Math	15.75
123's, ABC's	
Big-Bigger-Biggest Shapes	19.75
Medical Terminology	14.75
Telepatch 64K-Disk Only	14.75
Demon 64K	26.75
(Edtasm, Graph. Ed., Music Ed.)	
Adventure Game Decoder	11.75
Super Disk Utility (Disk) 32K	23.75
Astro Cast 32K	23.75
Family	19.75
Super Bowling Secretary 32K	19.75
Stress Evaluator	19.75
Weather Pro 32K	19.75
Weather Watch	19.75
Philatelic Mgmt. Disk Only 32K	23.75
Inspector Clueseau	14.75
Bond Yield	17.75
Master Graphics	29.75

**Add \$3.00 For Disk**

**\$1.00 SHIPPING!**

We'll Ship Your Order To  
Anywhere In The USA  
For Only \$1.00

**Send For Our Free Catalog**

**We Have Gift Certificates!**

# Saguaro Software



**NEW 24-HOUR ORDER LINE**

**602-795-4159**



**7331 E. BEVERLY DRIVE • TUCSON, AZ 85710**  
AZ. Residents Add 7% Tax • Add \$1.00 Shipping • COD \$2.00 Additional  
Dealer Inquiries Invited • Some Quantities Limited  
**AUTHORS! ASK ABOUT OUR ROYALTY PROGRAM**



but these are minor shortcomings compared with the advantages the program provides.

I have been using a personal-finance program for several years that stores my predictable bills and bank deposits in DATA statements and then plots a graph showing how my checking-account balance is likely to look during the next several weeks. The program was written back when I was still using cassette storage. I've since transcribed

it for disk. I should rewrite it to take advantage of disk-file techniques, but I haven't had the time to do so. Edittron turned out to be the ideal tool for editing all those DATA statements. When I make a monthly payment, I use the routine to update the "Due Date" and shift the "Amount Due" to whatever I've predicted for my next month's bill. Edittron also helps by making it easy to search for names or dates.

Edittron has already found a home in this application on one of my frequently used disks. I recommend the routine highly. ■

*Edittron is manufactured by Vidtron, 4418 E. Chapman Ave., Suite 284, Orange, CA 92669, 714-639-4070. It runs on 16 to 64K CoCos and requires Extended Color Basic. It sells for \$20 on cassette and \$22 on disk.*

## Sideways with Side Wise

by Scott L. Norman

	ease of use	documentation	performance	error handling
6				
5				
4				
3				
2				
1				
<b>OVERALL RATING 5</b>				
Application Software				

**D**o you use your Color Computer to generate w-i-d-e spreadsheets? Are you tired of compromising your high-tech printouts by using cellophane tape to hold them together? Then you might be interested in Side Wise, a nifty new utility from Derringer Software. Side Wise can read any ASCII disk file and signal a dot-matrix printer to print on a 90-degree angle so that the spreadsheet's rows are running parallel with the

long dimension of the paper. The most common application for this feature might be a multi-columned spreadsheet that represents a long period of time.

There are some minor limitations. Side Wise limits printed lines to 255 characters, but that is enough for many purposes. The program also requires your printer to have dot-addressable graphics capability; the rotated characters are produced by a machine-

# GREAT COCO PRODUCTS

## HI-RES GRAPHIC ADVENTURES

- Calixto Island
- Black Sanctum
- Shenanigans
- Sea Search
- Trekboer

Cass. 24.95 Disk 27.95

## ARCADE GAMES

- Tut's Tomb
- Time Fighter
- Other titles available

24.95 27.95

## BUSINESS SOFTWARE

- Accounting System
- Order Entry System
- Easy-File Data Manager

99.95  
99.95  
59.95

## UTILITIES AND MISCELLANEOUS

- Super Screen
- Super Bug
- Easy-Edit Line Editor
- Zookey Typing Tutor

29.95 32.95  
29.95 32.95  
34.95  
24.95 27.95

## HARDWARE AND ACCESSORIES

- Discs & systems start at \$99.95
- Quality video Monitors
  - Taxan Amber 129.95
  - Sakata Color 269.95
- Universal Video Driver
  - works with all Color Computers & all monitors 29.95
- Super Pro Keyboard 64.95
- F-Board Adapter 4.95

## SUPPLIES

- C-10 Cassettes w/labels .59 ea. or 10 for 5.50
- Cassette Storage Boxes .25 ea. or 10 for 2.00
- 5¼" Disks — high quality, 2.25 ea.  
nationally advertised brands 10 for 19.95
- 64K Memory Expansion Kit  
all parts & complete instructions 39.95
- Fanfold Printer Paper — letter size 500 sheet pack 8.95  
sheets (9½ x 11) with detachable 2500 sheet carton  
perforated margins; high quality 20 lb. bond 37.95

**SHIPPING:** All orders under \$100 please add \$2 regular, \$5 air. All orders over \$100 please add 2% regular, 5% air. California residents please add 6% sales tax. Orders outside the continental U.S., check with us for shipping amount; please remit U.S. funds. Software authors—contact us for exciting program marketing details. We accept MasterCard and VISA. Distributed in Canada by Kelly Software.

**FREE - Send for our NEW 24 page catalog!**

**Mark Data Products**

24001 ALICIA PKWY., NO. 207 • MISSION VIEJO, CA 92691 • (714) 768-1551



language routine that works through the graphics codes. Side Wise comes with routines for driving Radio Shack's DMP series, Epson, C. Itoh, Okidata, and Gemini printers and their clones. These drivers should cover most installations. Author Dennis Derringer has offered to assist customers with making the program compatible with other printers or refund the purchase price of Side Wise.

The program disk contains two copies of a Basic program called Side and a machine-language routine named Wise. You can copy these on an applications program disk and use them in a single-disk system. Once Side Wise is in memory, you can exchange a data disk for the program disk.

Side Wise operation is easy. Typing RUN "SIDE" loads the program and brings up prompts for you to type in the printer and baud rate you want to use, and a main menu. The next step is to specify the name and drive number of the ASCII file you want to read and then stand back. Side Wise loads the file and displays the number of lines of text it contains. You can either specify the first and last lines for printing or just print the whole file if it will fit. Fitting means that the short dimension of a printed page (typically 8½ inches) is large enough to hold all

the lines. The menu screen tells you how many lines will fit.

Side Wise's documentation also has a table of the number of printed lines it takes to cover the width of a page in both standard and compressed format (you select one of these two fonts with a toggled command) for each printer model the program supports. For example, my Epson FX-80 can print 48 lines in a single burst in standard font and 96 lines in the compressed mode. The C. Itoh Prowriter is the champ when it comes to packing in the data. It can stuff up to 108 compressed lines into a space 8½ inches high. If your file contains more data, you must enter additional start-line and end-line commands before printing each group of lines.

Once Side Wise has your printing under

This text demonstrates the ability of Side Wise to print any ASCII file sideways. It was prepared with the ASCII I/O option of Telewriter 64 and stored on disk for the Derringer program. One note of caution: do not use embedded control characters—they will not be properly interpreted by Side Wise.

Fig. 1. The Side Wise Character Set on the Epson FX-80

way, there is little to do but sit back, watch the show, and ponder the merits of the utility. One question that comes to mind is print quality. What do you give up by going sideways with Side Wise? The answer is speed and density. Side Wise prints in only one direction so you cannot get the equivalent of emphasized printing. In all probability the character set for your printer will not be the same as the one defined by your printer's ROM. The character set that Side Wise and my Epson produce is very pleasing, however. (See Fig. 1.) It is not likely that there are legibility problems with any of the printers that are compatible with Side Wise.

There are some procedures to remember when using Side Wise with applications programs. For the most part these concern setting line length. If you want Side Wise to print 150 characters wide, remember to specify it wherever it is appropriate in your application program. For example, before producing an ASCII file with DynaCalc's output-to-disk-file command, you should change the parameter for width of a printed page. If you don't, Side Wise generates 80 columns of spreadsheet turned on its side. The attributes command, /A, gives you the appropriate options. The complete com-

## Mouse Technological Software For The Color Computer!

*Many Companies call their  
Home and Business Software  
User Friendly . . .*

ONLY ONE CALLS IT

# Child's Play™

COMING  
SOON!

Send for  
FREE Catalog

TCE BUSINESS DIVISION  
P.O. BOX 2477  
GAITHERSBURG, MD 20879  
1-800-4TC-4TCE 1-(301) 963-3848



mand string for a 150-character spreadsheet is /APW150.

You should also change the line length if you want to use Side Wise to print a file you wrote with your word processor. Side Wise does not recognize imbedded control characters, so get rid of them before saving the file to disk. For example, you must strip TeleWriter-64 documents of all font-control commands introduced by a caret (^). If you

leave them in, you will receive an odd, near verbatim printout as the program struggles to interpret the carets and other commands. Side Wise does not recognize left-margin settings. The simplest way to have your printout start 10 spaces from a page break is to advance the paper 10 lines past the print head manually before you begin.

I gleaned these last few points while using Side Wise in several successful practice ses-

sions. Don't let them deter you. Side Wise works well and is easy to use. It is also a unique program in the Color Computer world. ■

*Side Wise is manufactured by Derringer Software Inc., P.O. Box 5300, Florence, SC 29502-2300, 803-665-5676. It requires a disk drive and sells for \$19.95.*

## RGS Dual DOS Card

by Gary W. Clemens

	construction quality	documentation	set up	performance	ease of use
6					
5					
4					
3					
2					
1					
<b>OVERALL RATING 4.50</b>					
Hardware					

**T**he Dual DOS Card from RGS Micro Inc. lets you access two ROMs or a ROM and an EPROM without opening your disk controller to switch ICs (integrated circuits). The product was designed to plug into the ROM socket of J&M's JDOS Disk Controller (it won't fit in the Radio Shack controller) and has two additional sockets and an external switch. It comes in two configurations. You can get two 24-pin sockets for two ROMs or two 28-pin sockets that can hold a 24-pin

ROM and a 24- or 28-pin ROM or EPROM. This gives you the option of having DECB (Disk Extended Color Basic) and JDOS, or a DOS and an EPROM of your choice at your fingertips. If you buy the 24/28-pin configuration, you have to modify the card to use a 28-pin chip.


### Construction and Setup

The Dual DOS Card is durable and well-  
*Continued on p. 72*


Circle Reader Service card #299

**SPECTRAL ASSOCIATES**

**TALKING GAMES**



\$24.95 for tape



\$27.95 for disk

**SYZYGY (siz-ih-gee)**  
The Ultimate Graphics Adventure! You are trapped aboard the Deathstar starship and have had a near fatal encounter with the Dark Lord, Darth Vader. Your strength is all but gone and you know that Vader is somewhere near. Your only hope is to locate the mysterious Glowing Emerald, hidden deep within the Deathstar, guarded by the Dark Lord himself. Syzygy has over 250 graphic pictures and 300 locations with an assortment of treasures, weapons and hazards. These allow a virtually endless array of different scenarios and complex situations designed to give the user hour upon hour of entertainment and adventure. Grab your light saber and may the Force be with you! 32K required.

**SPACE TREK**  
Realistic, hi-res 3-D graphics put you in the captain's seat of the Federation's most powerful starship. Work your way from sector to sector by fighting the deadly aliens which are trying to destroy you. A long range scanner, front view screen, phasers, photon torpedoes, mines, shields, star bases and 3-D asteroids are only a few of the many features which make Space Trek the most realistic space battle simulation ever developed. Space Trek will talk when you have a Tandy Speech/Sound cartridge. Colorware's Real Talker or Spectrum Projects' Voice Pak installed. Just plug one in before loading the program and fasten your seat-belt for the ultimate in simulations for the Radio Shack Color Computer. 32K and joysticks required.

CALL 1-206-581-6938 to place your Visa or MasterCard order today!  
SEND your order with check or money order (sorry, no C.O.D.) to:

**SPECTRAL ASSOCIATES**  
**3418 South 90th Street**  
**Tacoma, Washington 98409**

All orders shipped in two business days. Allow two weeks for delivery.  
Shipping & Handling:  
United States add 3%; \$2 minimum. Canada add 6%; \$3 minimum. Foreign add 15%; \$5 minimum. Washington State residents add 7.8% sales tax.

Circle Reader Service card #223

**DISKETTES AND 680X SOFTWARE**

**SUPER SLEUTH DISASSEMBLER** EACH \$99-FLEX, \$101-OS-9  
interactively generates source on disk with labels, includes xref specify 6800,1,2,3,5,8,9/6502 version or Z-80/8080/85 version OS-9 version also processes FLEX object file format

**OBJECT-ONLY versions:** EACH \$50-FLEX & OS-9, \$49-COCO DOS  
COCO DOS available in 6800,1,2,3,5,8,9/6502 version only

**CROSS-ASSEMBLERS** EACH \$50-FLEX/OS-9, ANY 3 \$100, ALL \$200  
specify for 180x, 6502, 680x, Z-80, 8048/51, 8085, 68000  
true, modular, free-standing cross-assemblers, written in C  
8-bit source included only with all cross-assemblers (for \$200)

**DEBUGGING SIMULATORS** EACH \$75-FLEX, \$100-OS-9  
specify 6800/1, (14)6805, 6502, 6809 OS-9, Z-80 FLEX  
**OBJECT-ONLY versions:** EACH \$50-COCO FLEX & COCO OS-9

**6502 TO 6809 ASSEMBLER TRANSLATOR** \$75-FLEX, \$85-OS-9  
translates 6502 programs to 6809, noting inexact conversions

**6800 TO 6809 & 6809 PIC TRANSLATORS** \$50-FLEX, \$75-OS-9  
translates 6800 programs to 6809, 6809 programs to PIC

**FULL-SCREEN FLEX TSC XBASIC PROGRAMS**  
(with complete cursor control)

DISPLAY GENERATOR/DOCUMENTOR	\$50 w/source, \$25 without
MAILING LIST SYSTEM	\$100 w/source, \$50 without
INVENTORY WITH MRP	\$100 w/source, \$50 without
TABULA RASA SPREADSHEET	\$100 w/source, \$50 without

**DISK AND XBASIC UTILITY PROGRAM LIBRARY** \$50-FLEX  
edit sectors, sort directory, maintain master catalog, do disk sorts, ...

**CMODEM PROGRAM** \$100-FLEX & OS-9  
menu-driven with terminal mode, file xfer, MODEM7 protocol, etc.  
**OBJECT-ONLY versions:** EACH \$50-FLEX & OS-9

**5.25" DISKS** EACH 10-PACK \$13-SSDD \$15-SSDD/DSDD \$25-DSQD  
American-made, excellent quality, with jackets and hub rings

Computer Systems Consultants, Inc.  
1454 Latta Lane, Conyers, GA 30207  
Telephone Number 404-483-1717/4570

Most programs in source on disk: give computer, disk size, OS.  
Contact CSC for full catalog and dealer information.  
25% off multiple purchases of same program on same order.  
VISA and MASTER CARD accepted; US funds only, please.  
Add GA sales tax and 5% shipping; no shipping for disks in 100's.

FLEX trademark Technical Systems Consultants. OS-9 trademark Microware.



## TUTORIAL

by Richard E. Esposito and Raymond W. Rowe

```
DATAU4E2F2  
R3D2G1L2,BU1F1R  
U6R2F1D4G1L2,R3L  
R2D2U3R3,U5E1R1F1H1  
U6D3R3U3D6,BR1R2L1U  
U6D3R1E3G3F3,U6D6F  
U1F1R2E1U4H1L2G1D4,U6F  
D6L3R3H1F2,U6R3D3L3R1E  
U2L3U2E1R1F1,BR1U6R2  
BU2U4D4F2E2U4,U6D6R2  
U4U1D1G2H2U1D1F4D1,B  
U1,R3L3U2E3U1L3,BU  
U1D4,BR1R2L1U6G1,R3  
U1F1R1E1U2L2R2U2H1L  
U4U3,BU1F1R1E1U1H1  
U1F1H1L1G1D4F1R1E1  
U4,BU1U4E1R1F1D4G1  
U1E1U4H1L2G1D1F1R  
EK(65280)=12  
THENJ=1:SOUND2  
SCREEN1,SM:LINE  
6),PSET,B:GOSUB10:  
U8L2D8R2U8L4H2U12R2D1  
R2D10U10R2D10U10R2D12G2L2":R
```



# 64K Modification Revisited

*Get the scoop on upgrading your CoCo no matter what version you have.*

**S**till struggling with 32, 16, or even 4K of memory in your Color Computer? In most cases, increasing your CoCo's memory capacity is easy enough for anyone with the confidence to try.

Some upgrading techniques, however, are too involved for novices. Opening your Color Computer voids its warranty, and if you make a mistake such as cutting a land on a printed circuit (PC) board, your local Radio Shack technician might refuse to service it. Each upgrade method in this article is rated for level of difficulty.

When Radio Shack was charging \$150 for the 64K RAM chip set, the do-it-yourself upgrade could save the user up to \$100—worth risking damage to the CoCo. Today the savings are less, so if anything in this article is not clear to you, don't go ahead with the procedure. A wrong assumption could be costly. Read all instructions thoroughly and make sure the modification does not exceed your level of experience. And make sure you have all the parts on hand.

## Ground Rules

Chips are numbered counterclockwise from the notch (Fig. 1). Where soldering is called for, use a 25- to 40-watt iron with small-gauge (71 mm. is fine), 50/50 or 60/40 rosin-core solder. Where wire is called for, use 30-gauge insulated wire. Where 4164 dynamic RAMs are called for, they must be of the 128-cycle variety. NEC chips are suitable, but TMS chips will not work because they require a 256-cycle refresh.

The difficulty ratings are easy (no soldering required), moderate (some soldering required), and difficult (cutting of lands or desoldering necessary).

Use the following procedure to prepare your CoCo for each upgrade modification. Open the CoCo by turning it upside down and removing the five (six on the CoCo 2) screws. Be sure to remove the screw under the warranty seal. Place a piece of masking tape over each hole so you won't lose the screws. Turn the machine upright and lift off the top.

Unplug the keyboard and put it aside. After clipping the two plastic cable ties, remove the metal shield covering the section of the board that contains the 6809 CPU (central processing unit), 6883 SAM (synchronous address multiplexor), the 6821 PIAs (peripheral interface

adaptors), the 6847 VDG (video display generator), and the memory chips. (Note: The CoCo 2 may not have a shield.)

## 4K to 16K—Easy

This modification applies only to C, D, or E boards.

Remove the metal shield. The eight 4K RAMs are identified as U20 to U27 on the board. Replace these with 4116 dynamic RAMs, making sure that the rounded notches on the chips match the notches on the sockets. (The notches point toward the rear of the computer.)

Move all jumpers to the 16K position. Replace the shield and close up the machine and you are done.

*Continued on p. 54*

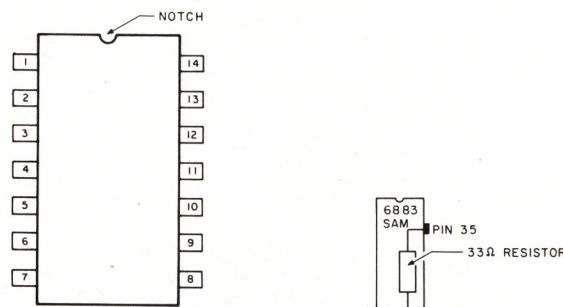


Fig. 1. Chip Pin Location

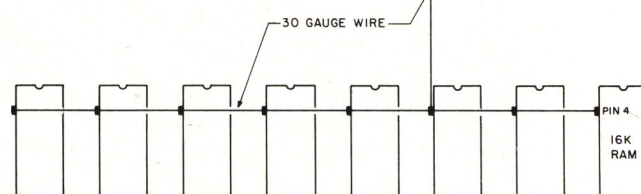


Fig. 2. The Piggyback Upgrade



# There's only one newsstand in the entire world offering you this selection of great computer publications.



## You're holding it.

That's right; you can get them all here. **And at discounts.** So browse. Whether you're new to computers, an experienced home/professional user or "in the business": order yours, today!

- ☐ **Computerworld.** If you manage information, you can't manage without your own subscription. \$39 gets you 51 issues, plus 10 Special Focus publications. Save \$5.
- ☐ **PC World.** The one publication that will grow with your growing PC needs. Helps you analyze financial/accounting data, manage complex projects, communicate results and plan. Now 12 issues for only \$17.97; you save \$5.78.
- ☐ **InfoWorld.** The only way to stay on top of what's happening is by getting the **only** personal computing newsweekly. Authoritative. Objective. Easy to read. \$29.58 for 51 issues . . . only 58¢ an issue.
- ☐ **inCider.** The Apple journal . . . and the **only** magazine devoted exclusively to the Apple family of computers. \$24.97 for 12 monthly issues. Save 30% off the cover price.
- ☐ **Macworld.** The world's most creative computer demands a journal that's just as simple, powerful and fun: *Macworld*. Now 12 issues of this attractive, easy-to-read publication can be yours for only \$24 (you save \$6).
- ☐ **HOT CoCo.** Keep the color in your life all year long with *HOT CoCo*, the magazine specifically created for the TRS-80 color computer and MC-10 user. \$24.97 for 12 months. Save 30% off the cover price.
- ☐ **80Micro.** Don't risk being an uninformed TRS-80 user. Get current, unbiased, system-specific information from the largest, most knowledgeable TRS-80 source. \$24.97 for 12. Save 48% off the cover price.
- ☐ **RUN.** The informative (and fun) Commodore 64/Vic-20 monthly. Comprehensive software/hardware reviews, action-packed games and timely tips to help you get the most out of your system. \$19.97 for one year: 43% off the cover price.
- ☐ **Micro Marketworld.** Selling? Twice a month, get in-depth reviews/forecasts to keep **ahead** of consumer trends/market needs. FREE if you qualify.

☐ **On Communications.** Bypass, teleconferencing, CATV: each month, explore the major developments shaping our communications world. FREE to qualified applicants.

### TO ORDER:

Check the publications you want above, then fill in below, and return this page to:

CW Communications/Inc.  
Circulation Department  
Box 880  
Framingham, MA 01701

Name \_\_\_\_\_  
(Please print or type.)

Title \_\_\_\_\_

Company \_\_\_\_\_

Nature of Business \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Telephone ( ) \_\_\_\_\_

Address shown is: ☐ Home ☐ Business

☐ Bill me.

☐ Payment enclosed (make check payable to "CW Communications/Inc.")

☐ Send information about foreign rates.

Please allow 6-to-8 weeks for your first issue.

### Your Money-Back Guarantee

If for any reason you're ever dissatisfied with your subscription, simply request a refund for all unmailed issues.



**CW COMMUNICATIONS/INC.**

375 Cochituate Road, Box 880  
Framingham, MA 01701  
(617) 879-0700

6C09-12-HC06



*From Computer Plus to YOU...*  
**PLUS after PLUS after PLUS**

**A SPECTACULAR  
OFFER!**



**A  
VERY  
AFFORDABLE  
DAISY WHEEL PRINTER**

**SMITH-CORONA L-1000**

**ONLY  
\$259.00**

The Smith-Corona L-1000 text printer delivers fully formed executive quality daisy wheel print at a speed of 12 characters per second. It features bi-directional printing, triple pitch — 10, 12, 15 cpi, logic seeking, underlining, 570 character buffer, and has both a serial and parallel interface for easy connection to any computer. It takes single sheets of paper up to 13 inches wide, and an optional continuous forms feed can be added at any time.

The Smith-Corona L-1000 is a simple, low cost and reliable text printer backed by the quality workmanship of Smith-Corona. The L-1000 is compatible with most word processors, and even if you own a dot matrix printer this is a great opportunity to obtain professional looking results at an affordable price.

Take advantage of this one time offer from Computer Plus while supplies last.

**CALL TOLL FREE  
1-800-343-8124**

- LOWEST POSSIBLE PRICES
- BEST POSSIBLE WARRANTY
- KNOWLEDGEABLE SALES STAFF
- TIMELY DELIVERY
- SHOPPING CONVENIENCE



**computer  
plus**  
P.O. Box 1094  
480 King Street  
Littleton, MA 01460 **SINCE 1973**

IN MASSACHUSETTS CALL (617) 486-3193



# Missile Defense

*The aliens are back,  
and boy are they mad.*

**M**issile Defense II picks up the theme of the arcade game Missile Command. The object of the game is to defend your six cities from attack by missiles and aliens. There are five different skill levels, each increasing in speed and score values.

The joystick moves a sighting cursor and the joystick button fires your laser. To hit a missile, place the sighting cursor directly on or below the leading edge of the missile. To hit an alien, aim the cursor at the off-colored pixels on each alien.


Any missiles that are not hit will continue down the screen until they hit a city or the ground near a city. Aliens you do not hit will attack your laser turret and penalize you by stealing some of your extra cities. You lose the game if you do not have any extra cities, if all your cities are destroyed, or if a missile penetrates the ground near a city.

## Loading Missile Defense

Missile Defense is made up of two separate programs: the main program, Defense 2 (Listing 1), and its controlling Basic loader program (Listing 2). To load Missile Defense, type in and save Listing 1. (Due to memory limitations, users with 16K systems must type PCLEAR 2 before entering Listing 1.) Then enter the Basic loader by typing in Listing 2 after entering CLEAR 200,&H3D00. Note: 16K users must unplug the disk controller in order to have sufficient memory.

## System Requirements

**16K RAM  
Extended Color Basic  
Joystick**

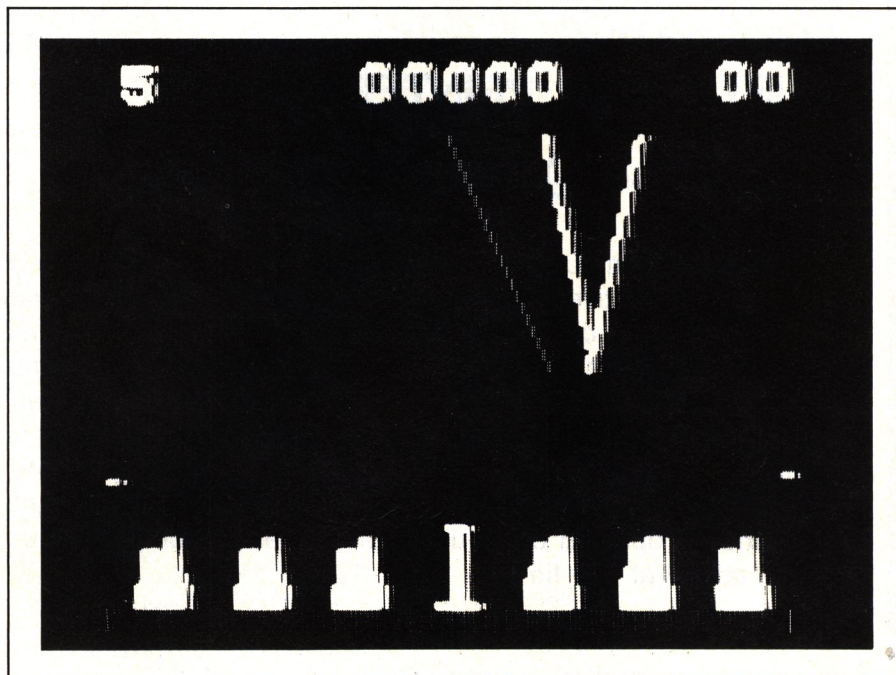

The Basic loader saves the machine code on tape or disk. On disk systems, the loader will automatically save the machine code to Drive 0. If you use tape, use Listing 2 to generate the machine code and then save that code directly after Listing 1.

## Special Features

You can make the game more competitive. Defense II includes a top-ten scoring routine which allows you to modify the program through the use of an auto-disk save. With it you can record the scores of the top ten play-

ers. To take advantage of this feature, remove the remark symbol from line 2630, but first be certain that line 1090 is exactly as written in Listing 1, since it is vital to the save routine. For a bigger challenge at a higher speed, activate the POKE switch in line 1280 by removing the remark symbol.

Our best score is 25,786. Try to beat it! ■

*See program listing on page 48*

Address correspondence to Jim McDowell, JML Software Design, Northgate Road, Apt. 231, Burlington, VT 05401.



# HOT CoCo's Pull-Out Program Listings

64K Modification Revisited .....	45
80K Color Computer .....	45
Doctor ASCII .....	46
Mindbusters .....	47
Missile Defense .....	48
Pie In The Sky .....	50
Investment Analysis .....	51
Fabulous Fonts For The Gemini 10X .....	52
How Your CoCo Adds Up .....	52



All program listings are available on our Instant CoCo cassette.

## 64K Modification Revisited

Program Listing 1.

Memory Test

```

10 FOR I= 32382 TO 32407
20 READ X
30 POKE I,X
40 NEXT I
50 EXEC32382
60 DATA 26,80,142,128,0,166,132,183
70 DATA 255,223,167,128,183,255,222,140
80 DATA 255,0,38,241,183,255,223,28
90 DATA 175,57
100 CLS:PRINT
110 PRINT"E-BOARD TEST - E"
120 PRINT "WRITE TO ROM AREA - R"
130 PRINT"WHICH ONE?";
140 AS=INKEY$:IFA$="" THEN 140
150 PRINTAS
160 IF AS="R" THEN 240
170 IF PEEK(49152)=68 THEN S=&HE000 ELSE S=&HC000
180 FOR I=S TO &HFEFF
190 POKEI,0: IF PEEK(I)<>0 THEN PRINT"TEST FAILS AT $";HEX$(I):GOTO110
200 POKEI,255: IF PEEK(I)<>255 THEN PRINT"TEST FAILS AT $";HEX$(I):GOTO110
210 PRINT0,HEX$(I):NEXTI
220 PRINT"E-BOARD TEST CHECKS OK": PRINT

```

```

230 GOTO110
240 POKE&HA147,99
250 IF PEEK(&HA147)<>99 THEN PRINT"TEST FAILS":GOTO110
260 PRINT"OS-9, FLEX, 64K CHECKS OUT": PRINT
270 GOTO110

```

Program Listing 2.

64K Enable

```

10 REM ENABLE 64K AND COPY BASIC INTO RAM
20 FOR I= 32382 TO 32407
30 READ X
40 POKE I,X
50 NEXT I
60 EXEC32382
70 DATA 26,80,142,128,0,166,132,183
80 DATA 255,223,167,128,183,255,222,140
90 DATA 255,0,38,241,183,255,223,28
100 DATA 175,57
110 REM RESET PROTECTION
120 POKE&HA055,&H0D
130 FOR I=&HA068 TO &HA071
140 POKE I,&H12
150 NEXT I
160 REM USE RESET VECTOR
170 A1=PEEK(114): A2=PEEK(115)
180 POKE114,0:POKE115,&HF8
190 POKE&HF8,&H12
200 POKE&HF9,&H7F: POKE&HFA,&HFF: POKE&HFB,&HDF
210 POKE&HFC,&H7E: POKE&HFD,A1: POKE&HFE,A2
220 PRINT"BASIC NOW IN RAM"
230 POKE 44014,ASC("o")
240 POKE 44015,ASC("k")

```

## The 80K Color Computer

Program Listing 1. Bank Switching Utility

```

5 CLEAR 100,32300
10 FOR I=65068 TO 65068+172
20 READ AS:POKE I,VAL("&H"+AS):NEXTI
25 RESTORE
30 FOR I=32300 TO 32300+172:READ AS:POKE I,VAL("&H"+AS)
40 NEXTI
41 RESTORE
42 DEFUSR0=32300:DEFUSR1=32326
45 IFPT>0 THEN 54
47 PT=1
50 XX=USR0(0)
52 GOTO10
54 POKE&HFFDE,1
55 YY=USR1(0)
60 END
199 'ML SUBROUTINE 1
200 DATA1A,50,8E,80,00,A6,84,B7
210 DATAFF,DF,A7,80,B7,FF,DE,8C
220 DATAFF,00,26,F1,B7,FF,DF,1C
230 DATAAF,39
235 'ML SUBROUTINE 2
240 DATA1A,50,8E,00,00,10,8E,00
250 DATA00,A6,80,B7,FF,D5,A7,A0
260 DATAB7,FF,D4,10,8C,80,00,25
270 DATAF0,1C,AF
275 'ML SUBROUTINE 3
280 DATAB7,FF,D5,86,39,B7,01,67
290 DATAB7,FF,C6,B7,FF,C9,B7,FF
300 DATACA,B7,FF,CC,B7,FF,CE,B7
310 DATAFF,D0,B7,FF,D3,39
315 'ML SUBROUTINE 4

```

Listing continued



Listing continued

```

320 DATAB7,FF,D4,86,7E,B7,01,67
330 DATAB7,FF,C6,B7,FF,C9,B7,FF
340 DATAA,B7,FF,CC,B7,FF,CE,B7
350 DATAFF,D0,B7,FF,D2,39
355 'ML SUBROUTINE 5
360 DATA1A,50,8E,00,00,10,8E,00
370 DATA00,A6,80,B7,FF,D5,A7,A0
380 DATAB7,FF,D4,10,8C,05,FF,25
390 DATAF0,1C,AF,7E,7E,61
395 'ML SUBROUTINE 6
400 DATA1A,50,8E,00,00,10,8E,00
410 DATA00,A6,80,B7,FF,D4,A7,A0
420 DATAB7,FF,D5,10,8C,05,FF,25
430 DATAF0,1C,AF,7E,7E,7F

```

Program Listing 2. Bank Switching Utility, Assembly Version

```

7E2C      00090 *MACHINE LANGUAGE SUBROUTINE 1
7E2C 1A 50 00095 ORG $7E2C
7E2E 8E 8000 00100 ORCC #$50 INHIBIT INTERRUPTS
7E31 A6 84 00110 LDX $8000 START OF ROM
7E33 B7 FFDF 00120 LOOP1 LDA ,X GET ROM BYTE
7E36 A7 80 00130 STA $FFDF MAP1
7E38 B7 FFDE 00140 STA ,X+ STORE BYTE, INCREMENT X
7E3B 8C FF00 00150 STA $FFDE MAP0
7E3E 26 F1 00160 CMPX $FF00 ALL ROM COPIED?
7E40 B7 FFDF 00170 BNE LOOP1 LOOP IF NO
7E43 1C AF 00180 STA $FFDF LEAVE MAP 1 RUNNING
7E45 39 00190 ANDCC $AF ENABLE INTERRUPTS
00200 RTS
00210 *MACHINE LANGUAGE SUBROUTINE 2
7E46 1A 50 00220 ORCC #$50
7E48 8E 0000 00230 LDX $0 INITIALIZE REGISTERS
7E4B 108E 0000 00240 LDY $0 TO BOTTOM OF RAM
7E4F A6 80 00250 LOOP2 LDA ,X+ GET BYTE, INC. X
7E51 B7 FFDF 00260 STA $FFDF SELECT RAM BANK TWO
7E54 A7 A0 00270 STA ,Y+ STORE BYTE, INC. Y
7E56 B7 FFDF 00280 STA $FFDF SELECT RAM BANK 1
7E59 108C 8000 00290 CMPY $8000
7E5D 25 F0 00300 BLO LOOP2
7E5F 1C AF 00310 ANDCC $AF
00320 *MACHINE LANGUAGE SUBROUTINE 3
7E61 B7 FFDF 00330 STA $FFDF EXIT IN RAM BANK 2
7E64 86 39 00340 LDA $39 DISABLE SUBROUTINE WHICH
7E66 B7 0167 00350 STA $167 RESETS VIDRAM TO PAGE2
7E69 B7 FFCE 00360 STA $FFCE SET VIDRAM REGISTER
7E6C B7 FFC9 00370 STA $FFC9 TO BIT PATTERN
7E6F B7 FFCA 00380 STA $FFCA 1000010
7E72 B7 FFCC 00390 STA $FFCC
7E75 B7 FFCE 00400 STA $FFCE
7E78 B7 FFD0 00410 STA $FFD0
7E7B B7 FFD3 00420 STA $FFD3
7E7E 39 00430 RTS
00440 *MACHINE LANGUAGE SUBROUTINE 4
7E7F B7 FFD4 00450 STA $FFD4 SELECT BANK 1
7E82 86 7E 00460 LDA $7E ENABLE ROM SUBROUTINE
7E84 B7 0167 00470 STA $167 TO RESETVIDEO RAM TO PAGE 2
7E87 B7 FFCE 00480 STA $FFCE SET VIDRAM
7E8A B7 FFC9 00490 STA $FFC9 REGISTER TO
7E8D B7 FFCA 00500 STA $FFCA BIT PATTERN
7E90 B7 FFCC 00510 STA $FFCC 0000010
7E93 B7 FFCE 00520 STA $FFCE
7E96 B7 FFD0 00530 STA $FFD0
7E99 B7 FFD2 00540 STA $FFD2
7E9C 39 00550 RTS
00560 *MACHINE LANGUAGE SUBROUTINE 5
7E9D 1A 50 00570 ORCC #$50
7E9F 8E 0000 00580 LDX $0
7EA2 108E 0000 00590 LDY $0
7EA6 A6 80 00600 LOOP3 LDA ,X+
7EA8 B7 FFDF 00610 STA $FFDF
7EAB A7 A0 00620 STA ,Y+
7EAD B7 FFD4 00630 STA $FFD4
7EB0 108C 05FF 00640 CMPY $5FF
7EB4 25 F0 00650 BLO LOOP3
7EB6 1C AF 00660 ANDCC $AF
7EB8 7E 7E61 00670 JMP $7E61
00680 *MACHINE LANGUAGE SUBROUTINE 6
7EBB 1A 50 00690 ORCC #$50
7EBD 8E 0000 00700 LDX $0
7EC0 108E 0000 00710 LDY $0
7EC4 A6 80 00720 LOOP4 LDA ,X+
7EC6 B7 FFD4 00730 STA $FFD4
7EC9 A7 A0 00740 STA ,Y+
7ECB B7 FFD5 00750 STA $FFD5
7ECE 108C 05FF 00760 CMPY $5FF
7ED2 25 F0 00770 BLO LOOP4
7ED4 1C AF 00780 ANDCC $AF
7ED6 7E 7E7F 00790 JMP $7E7F
00800 END
00000 TOTAL ERRORS

```

```

LOOP1 7E31
LOOP2 7E4F
LOOP3 7EA6
LOOP4 7EC4

```

Program Listing 3. Basic Transfer Demonstration

```

100 CLS:PRINT"THIS SECTION OF THE PROGRAM IS EXECUTED IN THE FIRST RAM BANK."
110 INPUT"<ENTER> TO GO TO THE SECOND RAM BANK";ANS
120 EXEC 32413
130 CLS:PRINT"THIS SECTION IS EXECUTED IN THE SECOND BANK."
135 INPUT"<ENTER> TO RETURN TO BANK ONE";ANS
140 EXEC 32443
150 CLS:PRINT"NOW YOU ARE BACK WHERE YOU STARTED IN THE FIRST RAM BANK"

```

# Doctor ASCII

Program Listing 1. PUTLDR

```

10 ' PUTLDR.BAS V1.0
20 CLEAR 10000
30 CLS:PRINT" PUTLDR PROGRAM"
40 PRINT" BY"
50 PRINT" J.W.JACKSON"
60 PRINT" FOR"
70 PRINT" HOT COCO"
80 PRINT" <C> 1984"
90 IF YC<0 THEN 140
100 REM ADDS AN AUTOMATIC LOADER
110 REM TO A BINARY FILE ON DISK
120 REM SO THAT WHEN THE FILE IS
130 REM LOADM'D,IT AUTO STARTS.
140 PRINT:PRINT"SELECT OPTIONS"
150 PRINT"1. DISPLAY FILE ADDRESSES"
160 PRINT"2. PUT AUTO LOADER"
170 PRINT"3. REMOVE AUTO LOADER"
180 PRINT"4. QUIT"
190 INPUT" YOUR CHOICE <1,2,3,4>";YC
200 IF YC<4 THEN GOSUB 270:IF FE=0 THEN 300
210 IF YC<1 OR YC>4 THEN 300
220 IF YC=3 THEN UN$="Y" ELSE UN$="N"
230 ON YC GOSUB 360,620,380,260
240 IF YC=2 OR YC=3 THEN GOSUB 300
250 GOTO 300
260 END'*****
270 CLS:PRINT"ENTER FILENAME":PRINT" <DRIVE>:FILENAME<EXT>":LINE INPUT" ? ";AS
280 C0=INSTR(1,AS,":")
290 IF C0<3 THEN 320
300 DR$=MID$(AS,C0+1,1)
310 AS=DR$+": "+LEFT$(AS,C0-1)
320 IF (INSTR(1,AS,"/") = 0) AND INSTR(1,AS,":") = 0 THEN AS=AS+"/BIN"
330 GOSUB 810'CHECK FILE EXISTS
340 IF FE=0 THEN GOSUB 960:RETURN
350 RETURN
360 GOSUB 380'GET FILE ADDRESSES
370 INPUT" PRESS A KEY ";ZZ$:RETURN
380 EA=0:L=0:S=0:OS=1:UA=0'GET FILE ADDRESSES
390 OPEN "D",#1,AS,1
400 FIELD #1,1 AS BS
410 GET #1,OS:TI=ASC(BS)
420 GET #1,L+OS:LH=ASC(BS)
430 GET #1,L+OS:LL=ASC(BS):L=LH*256+LL
440 GET #1,L+OS:AH=ASC(BS)
450 GET #1,L+OS:AL=ASC(BS):A=AH*256+AL
460 IF TI=255 THEN A:TH=AH:TL=AL:GOTO 520
470 IF UN$="Y" AND TI=0 THEN IF A=159 THEN UA=OS
480 IF EA=0 OR EA=A THEN 490 ELSE GOSUB 590:GOSUB 580
490 EA=A+L
500 IF S=0 THEN GOSUB 560:GOSUB 580
510 IF TI=0 THEN S=S+L:OS=L+5+OS:GOTO 410
520 IF UN$="Y" AND UA>0 THEN GOSUB 730'REMOVE LOADER
530 CLOSE #1
540 GOSUB 590:GOSUB 600
550 PRINTSTRING$(30,""):RETURN
560 GOSUB 550:PRINTA$, " HEX/ DEC"
570 PRINTSTRING$(30,""):RETURN
580 PRINT"LOADS",HEX$(A)"/A:RETURN

```

Listing continued



```

590 PRINT"ENDS",HEX$(EA)"/"EA:RE
TURN
600 PRINT"EXEC",HEX$(T)"/"T
610 PRINT"SIZE",HEX$(S)"/"S:RE
TURN
620 GOSUB380:FL=OS'PUT LOADER
630 OPEN "D",#1,AS,1
640 FIELD #1,1 AS BS
650 RESTORE
660 FOR I=0TO23
670 READ B
680 LSET BS=CHR$(B)
690 PUT #1,FL
700 FL=FL+1
710 NEXT I
720 GOTO760
730 FL=UA'REMOVE LOADER
740 BS=CHR$(255):GOSUB800
750 BS=CHR$(0):GOSUB800:GOSUB800
760 BS=CHR$(TH):GOSUB800
770 BS=CHR$(TL):GOSUB800
780 CLOSE #1
790 RETURN
800 LSET BS=BS:PUT #1,FL:FL=FL+
1:RETURN
810 AA$=A$'CHECK IF FILE EXISTS
820 CO=INSTR(1,AA$,"")
830 IF CO>0 THEN DR$=LEFT$(AA$,C
O-1):DR=VAL(DR$):AA$=RIGHT$(AA$
,LEN(AA$)-CO)
840 IF CO=0 THEN DR=PEEK(&HEB)
850 SL=INSTR(2,AA$,"/")
860 IF SL>0THEN880
870 SL=INSTR(2,AA$,""):IF SL=0
THEN 890
880 L=LEN(AA$):AA$=LEFT$(AA$,SL-
1)+STRING$(9-SL,"")+RIGHT$(AA$,
L-SL)
890 FOR I=3 TO 11
900 DSKI$ DR,17,I,Z1$,Z2$
910 Z1$=LEFT$(Z1$,128)+LEFT$(Z2$
,127)
920 IF INSTR(1,Z1$,AA$)<>0 THEN
FE=1:GOTO950
930 NEXT I
940 FE=0' FILE DOESN'T EXIST
950 RETURN
960 CLS(0):PRINT"FILE "A$ NOT O
N DISK"
970 PRINT" PRESS A KEY";
980 IF INKEY$=""THEN980
990 RETURN
1000 DATA 00,00,16,00,159
1010 DATA 15,112,15,113,18
1020 DATA 32,02,173,174,127
1030 DATA 255,64,110,159,00,157
1040 DATA 255,00,00,00,159
1050 END' PUTLDR.BAS

```

## Mindbusters

### Program Listing 1. Fifteen Puzzle

```

100 REM * ORIGINAL FIFTEEN PUZZL
E *
110 REM * TRS-80 EXTENDED COLOR
BASIC 16K / RAMELLA
120 CLS: CLEAR 500: DIM A$(4)
130 A$(1)=" 1 2 3 4"
140 A$(2)=" 5 6 7 8"
150 A$(3)=" 9 10 11 12"
160 A$(4)="13 14 15"
170 FS=A$(1)+A$(2)+A$(3)+A$(4):
N=1: SS=STRING$(32,32)
180 X=10: Y=4: CS=STRING$(2,32):
DS="AZ,,"
190 GOSUB 330: PRINT: INPUT "HOW
MANY DISPLACEMENTS":Q: PRINT @
160,SS;
200 FOR R=1 TO Q
210 BS=MID$(DS,RND(4),1)
220 IF BS="A" AND ES="Z" OR BS="
Z" AND ES="A" OR BS="," AND ES="

```

```

." OR BS="." AND ES="." THEN210
230 PRINT @ 196,"DISPLACE:"N
240 GOSUB 290: IF J=0 THEN 210 E
LSE J=N+N+1: ES=BS: GOSUB 330
: NEXT R: PRINT @ 196,SS;
250 BS=INKEY$: IF INSTR(D$,BS)>0
THEN GOSUB 290 ELSE 250
260 GOSUB 330
270 IF FS=A$(1)+A$(2)+A$(3)+A$(4
) THEN PRINT @ 235,"YOU WIN": FO
R J=1 TO 50: SOUND RND(13)*13,1:
NEXT J: END
280 GOTO 250
290 IF BS="A" AND Y<4 THEN MID$(
A$(Y),X,2)=MID$(A$(Y+1),X,2): MI
D$(A$(Y+1),X,2)=CS: Y=Y+1: J=1
300 IF BS="Z" AND Y>1 THEN MID$(
A$(Y),X,2)=MID$(A$(Y-1),X,2): MI
D$(A$(Y-1),X,2)=CS: Y=Y-1: J=1
310 IF BS="," AND X<10 THEN MID$(
A$(Y),X,2)=MID$(A$(Y),X+3,2): M
ID$(A$(Y),X+3,2)=CS: X=X+3: J=1
320 IF BS="." AND X>1 THEN MID$(
A$(Y),X,2)=MID$(A$(Y),X-3,2): MI
D$(A$(Y),X-3,2)=CS: X=X-3: J=1
330 PRINT @ 0,"";: FOR Z=1 TO 4:
PRINT A$(Z): NEXT: RETURN
340 END

```

### Program Listing 2. Bull's Eye

```

100 REM * BULL'S EYE * TRS-80 EX
TENDED COLOR BASIC 16K/RAMELLA
110 POKE 65495,0: PCLEAR 2: PMOD
E 1,1: COLOR 3,0: PCLS 1: SCREEN
3,1: DIM M(31,31)
120 DIM K(6,5): FOR X=0 TO 5: FO
R Y=0 TO 4: IF X<1 OR Y<1 OR X>4
OR Y>3 THEN K(X,Y)=1
130 NEXT Y,X: FOR Z=26 TO 32 STE
P 6: CIRCLE(48,48),Z,4: NEXT: PA
INT(48,21),4,4
140 FOR Y=0 TO 64 STEP 32: FOR X
=0 TO 96 STEP 32
150 LINE(X,Y)-(X+32,Y+32),PSET,B
: LINE(X+1,Y+1)-(X+31,Y+31),PSET
,B: NEXT X,Y
160 PAINT(48,48),3,3: PAINT(125,
3),2,3: PAINT(125,92),2,3
170 COLOR 4,0: LINE(108,45)-(116
,50),PSET,BF: A=2: B=2: X=33: Y=
X: Q=32: W=32
180 AS=INKEY$: IF AS<>"A" AND AS
<>"Z" AND AS<>"," AND AS<>"." OR
AS="A" AND K(A,B+1)=1 OR AS="Z"
AND K(A,B-1)=1 OR AS="," AND K(
A+1,B)=1 OR AS="." AND K(A-1,B)=
1 THEN 180
190 IF AS="," THEN U=X+32: S=-1:
GOSUB 260: X=X+32: A=A+1
200 IF AS="." THEN U=X-32: S=1:
GOSUB 260: X=X-32: A=A-1
210 IF AS="A" THEN V=Y+32: S=-1:
GOSUB 270: Y=Y+32: B=B+1
220 IF AS="Z" THEN V=Y-32: S=1:
GOSUB 270: Y=Y-32: B=B-1
230 SS=SS+AS
240 IF PPOINT(48,48)=8 AND PPOIN
T(28,28)=8 AND PPOINT(48,23)=8 A
ND PPOINT(68,28)=8 AND PPOINT(74
,48)=8 AND PPOINT(68,68)=8 AND P
POINT(48,74)=8 AND PPOINT(28,68)
=8 AND PPOINT(23,48)=8 THEN SOUN
D RND(200),1: POKE 65494,0: GOTO
240
250 GOTO 180
260 V=Y: GET(U,V)-(U+Q,V+W),M,G:
FOR H=U TO X STEP S: PUT(H,V)-(
H+Q,V+W),M,PSET: NEXT H: RETURN
270 U=X: GET(U,V)-(U+Q,V+W),M,G:
FOR H=V TO Y STEP S: PUT(U,H)-(
U+Q,H+W),M,PSET: NEXT H: RETURN
280 END
290 REM * TYPE POKE 65494,0 AND
PRESS ENTER AFTER USE

```

### Program Listing 3. Consarnation

```

100 REM * CONSARNATION - PUZZLE
CONTEST #2 *
110 REM * COLOR BASIC AND MC-100
BASIC
120 CLEAR 500
130 P=1024: ' FOR MC-100 MAKE IT:
P=16384
140 CLS: DIM A$(8): Q=70: K=175:
M$="AZ,,"
150 A$(0)="9 4 2 2 7 1 5 4 3 3 2"
160 A$(1)="6 1 9 4 3 7"
170 A$(2)="5 5 3 1 1 1 4 9 2 5 1"
180 A$(3)="2 4 4 9 1 4"
190 A$(4)="1 1 7 5 3 7 6 9 4 3 2"
200 A$(5)="6 1 4 3 8 2"
210 A$(6)="1 6 8 2 9 3 4 6 3 8 9"
220 FOR X=70 TO 288 STEP 32: PRI
NT @ X,A$(Z):; Z=Z+1: NEXT
230 FOR X=37 TO 59: IF X=37 OR X
=59 THEN FOR Z=X TO X+256 STEP 3
2: POKE P+Z,K: NEXT Z
240 POKE P+X,175: POKE P+X+256,K
: NEXT X
250 FOR X=104 TO 120 STEP 4: FOR
Z=X TO X+128 STEP 64: POKE P+Z,
K: NEXT Z,X
260 E=PEEK(Q+P): F=Q+P
270 Z$=INKEY$:IF Z$<>"A"AND Z$<>"Z
"AND Z$<>","AND Z$<>"." THEN POKEQ+P
,255:PORT=1TO40:NEXT:P=POKEQ+P,E:G
OTO270
280 IF Z$="A" AND W$="Z" OR Z$="
Z" AND W$="A" OR Z$="," AND W$="
." OR Z$="." AND W$="," THEN 270
290 IF KJ=1 THEN KJ=0: GOSUB 520
: GOTO 270
300 W$=Z$: E=PEEK(Q+P): F=Q+P: G
OSUB 340: N=N+1
310 IF N=5 THEN SC=SC+VAL(CHR$(E
-64)): N=0: POKE F,112: E=PEEK(F
): W$="": H=H+1
320 IF H=10 THEN 530
330 PRINT @ 0,"TURN"H:"SC: GOTO
270
340 IF Z$<>"A" THEN 370
350 IF PEEK(P+Q-32)<>K THEN Q=Q-
32: GOTO 460
360 N=N-1: RETURN
370 IF Z$<>"Z" THEN 400
380 IF PEEK(P+Q+32)<>K THEN Q=Q+
32: GOTO 460
390 N=N-1: RETURN
400 IF Z$<>"," THEN 430
410 IF PEEK(P+Q-2)<>K AND PEEK(P
+Q-1)<>K THEN Q=Q-2: GOTO 460
420 N=N-1: RETURN
430 IF Z$<>"." THEN 460
440 IF PEEK(P+Q+1)<>K AND Z$="."
AND PEEK(P+Q+2)<>K THEN Q=Q+2:
GOTO 460
450 N=N-1: RETURN
460 IF Z$="A" THEN D$="N"
470 IF Z$="Z" THEN D$="S"
480 IF Z$="," THEN D$="W"
490 IF Z$="." THEN D$="E"
500 SS=SS+D$: F=Q+P: E=PEEK(Q+P)
: GOSUB 520: RETURN
510 E=PEEK(Q+P): F=Q+P: GOSUB 52
0
520 POKE Q+P,255: FOR T=1 TO 20:
NEXT T: POKE Q+P,E: RETURN
530 PRINT @ 0,"TURN"H"FINAL SCOR
E:";SC: SS=STR$(SC)+" "+SS
540 PRINT @ 320,"ANSWER STRING:"
SS: END

```



# Missile Defense

## Program Listing 1. Defense 2

```
1010 GOTO 2900
1020 ' DEFENSE VERSION 2.0
1030 'D-M-D SOFTWARE ASSOCIATES
1070 IF PEEK(&HC0000)=68 THEN CLEAR
1024,&H7CFE: AD=&H7D00: LOADM
"BDDEFENSE.BIN",&H4000 ELSE CLEAR1
024,&H3CFE: AD=&H3D00: CLOADM"BD
EFENSE"
1075 DEFUSR0=AD: CS=USR0(0)
1090 SL$="*** 00000000*** 00000000***
00000000*** 00000000*** 00000000*** 00000000***
00000000*** 00000000*** 00000000*** 0
0000"
1100 Q=VARPTR(SL$):Q=PEEK(Q+2)*2
56+PEEK(Q+3)
1110 DIM P(2), C(1,5), PS(2), NS
(9), CS(2), AS(1,1), S(4)
1120 'DRAW $ FOR CITIES & DGTS
1130 CS(0)="U4R2U4R2U14R6D4R2D12
R4D6L16"
1140 CS(1)="U6R2U12R4D2R4U6R2D12
R2D4R2D6L16"
1150 CS(2)="U8R2U4R2U8R2D4R4U6R4
D16R2D6L16"
1160 NS(0)="BU2U6E2R4F2D6G2L4BR1
4"
1170 NS(1)="BR2R4L2NU10BR10"
1180 NS(2)="BU8E2R4F2G2L2G4D2R8B
R6"
1190 NS(3)="BU8E2R4F2G2NL2F2D2G2
L4NH2BR14"
1200 NS(4)="BU4NR8E6D10BR10"
1210 NS(5)="BU10NR8D4R6F2D2G2L4N
H2BR14"
1220 NS(6)="BU10BR4NR4G4ND4R6F2D
2G2L4BR14"
1230 NS(7)="BU10R8G6D4BR14"
1240 NS(8)="BU2U2BU4E2R4F2G2NL4F
2D2G2L4BR16"
1250 NS(9)="BU8E2R4F2D2NL6D4G2L4
NH2BR14"
1260 'CITY,LASER ORIGNS; MISSLE
Y-POS, BONUS SIZE, HI/SLO POKES
1270 C(0,0)=10: C(0,1)=46: C(0,2
)=82: C(0,3)=154: C(0,4)=190: C(
0,5)=226
1280 P(0)=10: P(1)=5: P(2)=2: PN
=65494: PF=PN+1
1300 'PLAY $
1310 P0$="V31L10004CDEDEFEGFGAG
ABABO+C"
1320 P1$="V31L6901C#CC#CC#CC#CC#
CC#CC#CC#CC#CC#CC#CC#": P2$="V3
1L10004A": P3$="V20L2501PAPA":
P4$="L15010FA": P5$="V5L15004E"
1330 P(1)="T2V31L1303BEBEBEBEBE
BEBEBE": P(2)="T2V31L1003ABCDE
FGABCDGFGABCDGFGABCDGFGABCDGFGAB
CDEFGAB"
1340 AS$="GECECO-GO+CO-GE": P(0)
="V31L5005"+AS+AS+AS
1350 'MAIN PROGRAM
1360 'INSTRUCTIONS & LEVEL
1370 POKE PN,0: CLS: FOR T=487 T
O 231 STEP -32: PRINT @T,"D E F
E N S E II";: PLAY "V10L2405G"
: FOR U=0 TO 63: NEXT U: IF T>23
1 THEN PRINT @T,"
";: NEXT T
1380 PLAY P1$:POKE PF,0:PRINT: P
RINT@262,"INSTRUCTIONS (Y/N)?"
1390 AS$=INKEY$: IF AS$="Y" THEN 2
790 ELSE IF AS$="" THEN 1390
1400 POKE PF,0: CLS: PMODE 1,1:
PCLS
1410 PRINT@35,"CHOOSE SKILL LEVE
L (1-5):"
1420 L=ASC(INKEY$+" ")-48: IF L<
1 OR L>5 THEN 1420
1430 'CITYS, SCOR, HIT VAL, BONU
S CITYS, BONUS THRESHOLD, SCORE
COUNT, MISL X-POS & ANGL, SCREEN
MODE, COLRST OFST
```

```
1440 FOR T=0 TO 5: GOSUB 1860: N
EXT T: GOSUB 1890
1450 S(0)=0: S(1)=0: S(2)=0: S(3
)=0: S(4)=0: VA=10: C0=0: C1=0:
CC=3: SC=1: CT=6
1460 FOR T=0 TO 2: GOSUB 1830: N
EXT T: MD=1: CM=4: SCREEN 1,MD
1470 'SHOW LVL, SCOR, BNS CTYS
1480 LINE (0,0)-(254,10),PRESET,
BF: DRAW "C3BM92,10"+NS(S(4))+NS
(S(3))+NS(S(2))+NS(S(1))+NS(S(0)
)
1490 DRAW "BM5,10"+NS(L)+"BM228,
10"+NS(C1)+NS(C0)+"C4"
1500 'TOP OF MISSILE LOOP
1510 IF INKEY$="Q" THEN 2440 ELS
E IF RND(50)+RND(50)=20 THEN 208
0
1540 MS=USR4(0): IF MS THEN 1610
1550 IF USR1(L) THEN 1510
1560 SS=USR3(0): IF SS THEN 1580
ELSE IF VA THEN VA=VA-2
1570 GOTO 1510
1580 T=(SS AND 3)-1: GOSUB 1830:
IF T+1=SS THEN SC=P(T): PLAY P(
T)
1590 GOTO 1960
1600 'MSL HIT CTY, GND, OR UNDR
1610 FOR T=2 TO 0 STEP -1: IF (M
S AND 1) THEN GOSUB 1830
1620 MS=MS*.5: NEXT T: FOR T=0 T
O 5
1630 IF C(1,T)=PEEK(CS+T) THEN 1
690 ELSE ON C(1,T) GOTO 2440,167
0
1640 PLAY "V1": FOR U=0 TO 16 ST
EP 2: CIRCLE (C(0,T)+8,182),U,4,
2,.5,0: PLAY "V+V+V"+P4$: NEXT
U
1650 FOR U=16 TO 0 STEP -2: CIRC
LE (C(0,T)+8,182),U,1,2,.5,0: PL
AY "V-V-V"+P4$: NEXT U
1660 LINE (C(0,T)-8,160)-(C(0,T)
+24,182),PRESET,BF: C(1,T)=2: CT
=CT-1: GOTO 1630
1670 PLAY "V31": FOR U=0 TO 16 S
TEP 2: CIRCLE (C(0,T)+8,187),U,4
,.5
1680 PLAY P4$+"V-V-V-": CIRCLE (
C(0,T)+8,187),U,1,.5: NEXT U: C(
1,T)=1: GOTO 1630
1690 NEXT T: GOTO 2040
1700 '***SUBROUTINES***
1800 'CLEAR STREAMER
1810 A=USR5(T)
1820 '*GET NEW MISSL X-POS/ANGL
1830 A=RND(7)-1: B=RND(7)-1: IF
B=3 OR ABS(A-B)>2 THEN 1830
1840 A=USR0((B-A+2)*256+A*4+T):
RETURN
1850 '*DRAW GRND & RANDOM CITY
1860 C(1,T)=3: POKE CS+T,3: COLO
R 2,1: LINE (C(0,T)-10,184)-(C(0
,T)+24,190),PSET,BF
1870 DRAW "C4BM"+STR$(C(0,T))+",
182"+CS(RND(3)-1): PAINT (C(0,T)
+6,180),4: CT=CT+1: RETURN
1880 '*DRAW FORTRESS & GROUND
1890 DRAW "C3BM124,156R2D26NL6NR
8R2U26R2C2": LINE(102,184)-(152,
190),PSET,BF: COLOR 4,1: RETURN
1950 'SCORE ROUTINE
1960 A=VA*SC*L: VA=10: SC=1:T=0
1970 S(T)=S(T)+A: IF S(T)>9 THEN
A=INT(S(T)*.1): S(T)=S(T)-A*10:
T=T+1: GOTO 1970
1990 IF S(3)+S(4)*10<CC THEN 202
0 ELSE CC=CC+3: C0=C0+1: PLAY "T
205V24L80AP30": IF C0=10 THEN C0
=0: C1=C1+1
2000 GOTO 1990
2010 'CHECK LEVEL AGNST SCOR
2020 IF L*5-1<S(3)+S(4)*10 AND L
<5 THEN L=L+1
2030 'CHECK IF NEW CITY NEEDED
2040 FOR T=0 TO 5: IF C0=0 AND C
1=0 THEN 2055 ELSE IF C(1,T)<3 T
```

```
HEN PLAY P0$: GOSUB 1860: C0=C0-
1: IF C0<0 THEN C0=9: C1=C1-1
2050 NEXT T
2055 IF CT=0 THEN 2440 ELSE 1480
2060 'START OF ALIEN ROUTINE
2070 'CLR STRMRS, CHNG SCRIN MODE
, GET ALIEN ATTRK X-STRT & ANGL
2080 FOR T=0 TO 2: GOSUB 1810: N
EXT T: MD=1-MD: CM=MD*4: SCREEN
1,MD: R=0
2090 A=RND(100)*2+26: B=32: C=(1
26-A)*L/126
2100 'SELECT ALIEN
2110 ON RND(5) GOSUB 2290,2320,2
350,2380,2410
2120 'TOP OF ALIEN LOOP
2130 'INCR ALIEN POS, DRAW CURSO
R & ALIEN, CHECK IF AT FORTRESS
2140 A=A+C: B=B+L: R=1-R: IF R T
HEN PLAY P2$
2150 DRAW "C2BM"+STR$(INT(A))+",
"+STR$(B)+AS(R,0)+"C4"+AS(R,1)
2160 IF B>156 THEN 2250
2170 IF USR2(L) THEN 2230
2190 GOSUB 2210: GOTO 2140
2200 '*CLEAR ALIEN
2210 DRAW"C1BM"+STR$(INT(A))+",
"+STR$(B)+AS(R,0)+AS(R,1):RETURN
2220 'ALIEN HIT
2230 GOSUB 2210: POKE PN,0: PLAY
P1$: POKE PF,0: GOSUB 1890: VA=
20: SC=10: GOTO 1960
2240 'ALIEN ATTKD FTRRS: CHECK
NMBR OF BONUS CITYS
2250 IF C1=0 AND C0<L THEN 2440
ELSE GOSUB 2210: PLAY "V2403L9T3
FCV<FCV<FCV<FCV<FCV2": GOSUB 189
0: C0=C0-L: IF C0<0 THEN C0=C0+1
0: C1=C1-1
2260 GOTO 1480
2270 'ALIEN $
2280 'PAC-MAN
2290 AS(0,0)="R2E2L4U2R6U2L6U2R8
U2L8U2R6U2L6U2R4H2L4ND10G2D14H2U
6NU4NL2NG2": AS(0,1)="BR8U2"
2300 AS(1,0)="BD8U2R2E2L6U2R16D2
L6F2R2ND2U6L12U2R12H2L8E2R4": AS
(1,1)="BD6U2": RETURN
2310 'STARSHIP
2320 AS(0,0)="BD4U2NL2NR2U16F2ND
8BL4ND8BD6L4NU4ND2R12ND2NU4": AS
(0,1)="BL6U2"
2330 AS(1,0)="U2NL2NR2U16F2ND8BL
4ND8G2L2NU4ND2R12ND2NU4": AS(1,1
)="BD2BL6D2": RETURN
2340 'FLYING SAUCER
2350 AS(0,0)="U4NL4NR4U2NL8NR8U2
NL8NR8U2NL4NR4": AS(0,1)="BU2U2"
2360 AS(1,0)=AS(0,0)+"U4": AS(1,
1)="BD12D2": RETURN
2370 'POD
2380 AS(0,0)="NL2E2NL6E2NL10U2NL
10H2NL6H2NE4L2NH4BD10BL4G6P6BR10
E6H12": AS(0,1)="BD2R2"
2390 AS(1,0)="BL6NL2E2NL6E2NL10U
2NL10H2NL6H2NL2E2R2BL8L2BD12L4D8
BR18U8L4H6": AS(1,1)="R2":RETURN
2400 'ROBOT
2410 AS(0,0)="U10G2ND14D4NL6NR10
BE4ND14D2": AS(0,1)="L2"
2420 AS(1,0)="U10G2D10NG4BR4NF4U
10BR4D4L12U4BR4BD2": AS(1,1)="R2
": RETURN
2430 'TOP TEN SCORE ROUTINE
2440 POKE PN,0: FS=S(0)+S(1)*10+
S(2)*100+S(3)*100+S(4)*100: FSS=
STR$(FS): FSS=LEFT$(FSS,10)
10-LEN(FSS))+MID$(FSS,2)
2450 'LOOP-RIND POS IN TOP TEN
2460 FOR T=90 TO 9 STEP-9: IF VA
L(MID$(SL$,T-4,5))>FS THEN 2470
ELSE NEXT T: SL$=FSS+LEFT$(SL$,
81): GOTO 2480
2470 IF T=90 THEN GOSUB 2590: GO
TO 2560 ELSE SL$=LEFT$(LEFT$(SL$,
T)+FSS+MID$(SL$,T+1),90)
2480 GOSUB 2590: PRINT: PRINT" Y
```



```

OU'VE SCORED IN THE TOP TEN!"
2490 PRINT " PLEASE ENTER YOUR I
INITIALS."
2500 'GET INITS, ADD TO LIST
2510 U=T/9: PRINT @73+U*32,">";:
A=0: B=0: FOR V=0 TO 2
2520 FSS=INKEY$: IF FSS<CHR$(32)
THEN B=B+1: IF B=24 THEN B=0: P
OKE 1101+U*32+V,42+A: A=64-A: GO
TO 2520 ELSE 2520
2530 PRINT @77+32*U+V,FSS;: MIDS
(SL$,T+1+V,1)=FSS: NEXT V: GOSUB
2590
2540 'POKE LINE 1090 W/ UPDATED
SCORE LIST
2550 FOR T=0 TO 89: POKE T+Q,ASC
(MIDS(SL$,T+1,1)): NEXT T
2560 PRINT@419,"HIT ENTER TO PLA
Y NEW GAME HIT <Q> TO QUIT T
HIS PROGRAM";
2570 FSS=INKEY$: IF FSS=CHR$(13)
THEN 1400 ELSE IF FSS="Q" THEN
2620 ELSE 2570
2580 '*DISPLAY TOP 10 LIST
2590 CLS: PRINT " TOP TEN
SCORES": PRINT
2600 FOR U=1 TO 10: PRINT USING
" ## % %",U,MIDS(
SL$,U*9-8,9): NEXT U: RETURN
2620 CLS: PRINT"TO SAVE THE TOP
TEN SCORES JUST SAVE DEFENSE II
OVER ITSELF."
2625 '**OPTIONAL LINE FOR DISK
USERS TO AUTO-SAVE TOP TEN LIST
2630 'IF PEEK(&HC0000)=68 THEN SA
VE"DEFENSE2"
2770 END
2780 'INSTRUCTIONS
2790 CLS: PRINT "THE OBJECT OF T
HIS GAME IS TO DEFEND YOUR SIX
CITIES FROM MISSILES, AND Y
OUR FORTRESS FROMALIENS. TO DO
THIS YOU MUST POSITION YOUR S
IGHT ON A MISSILEOR THE DARKENED
PORTION OF AN ALIEN AND FIRE
YOUR LASER."
2800 PRINT: PRINT "THIS GAME CON
SISTS OF FIVE SKILLLEVELS WITH I
NCREASING MISSILE AND ALIEN SPE
EDS AS THE LEVEL INCREASES. TH
E FINAL VALUE OF A SCORE ON A MI
SSILE IS DETERMINEDBY THREE FACT
ORS:"
2810 GOSUB 2880: PRINT "FIRST, T
HE BASE VALUE OF THE SHOT IS
SET AT 10. EVERY SHOT MISSED D
ECREASES THIS VALUE BY 2 TO A M
INIMUM OF 0. WHEN A SHOT SCO
RES THE BASE VALUE IS MULTIPLI
ED BY THE SKILL LEVEL. A 'DEAD
CENTER' HIT WILL";
2820 PRINT " AWARD ABONUS MULTIP
LIER OF 2,5, OR 10 DEPENDING ON
COLOR. THE BASE VALUE IS RES
ET TO 10 EACH TIME ASHOT SCORES.
"
2830 PRINT: PRINT "A BONUS CITY
IS ASSIGNED EVERY 3000 POINTS.
SKILL LEVEL INCREASES EAC
H 5000 POINTS."
2840 GOSUB 2880: PRINT "A SUCCES
SFUL ATTACK BY AN ALIEN WILL COS
T 1-5 BONUS CITIES DEPENDIN
G ON YOUR LEVEL."
2850 PRINT: PRINT "YOU LOSE WHEN
ALL OF YOUR CITIESARE GONE, WHE
N AN ALIEN ATTACKS YOUR FORTRESS
AND YOU HAVE TOO FEW BONUS CIT
IES, OR WHEN A MISSILE PENET
RATES THE UNDERGROUND.
"
2860 GOSUB 2880: PRINT "THE TOP
OF THE SCREEN DISPLAYS FROM LEF
T TO RIGHT: LEVEL, SCORE, A
ND BONUS CITIES. AT THE E
ND OF THE GAME A 'TOP TEN' ROU
TINE WILL ALLOW FOR SAVING T
HE TOP TEN SCORES ON DISK."

```

```

2870 GOSUB 2880: GOTO 1400
2880 PRINT@481,">> TYPE ANY KEY
TO CONTINUE <<";
2890 IF INKEY$="" THEN 2890 ELSE
CLS: RETURN
2900 PCLEAR 2: GOTO 1020

```

### Program Listing 2. Basic Loader

```

10 '*** BDEFENSE MACHINE CODE
20 '*** LOADER
30 '*** (C) 1984 BY D-M-D
40 '*** SOFTWARE ASSOCIATES
50 '*****
55 CLS: PRINT"MACHINE CODE LOADI
NG..."
60 STARTADDRESS=&H3D00
70 AD=ST
80 READ CODE
90 IF CODE=999 THEN PRINT"MACHIN
E CODE IS NOW IN MEMORY": GOTO 5
00
100 POKE AD,CODE
110 AD=AD+1: GOTO 80
500 IF PEEK(&HC0000)=68 THEN SAVE
M"BDEFENSE.BIN",&H3D00,&H3FDB,&H
3D00: PRINT"BDEFENSE IS NOW STOR
ED ON DISK": END
510 PRINT"TO SAVE BDEFENSE ON TA
PE TYPE:"
520 PRINT"CSAVEM"CHR$(34)"BDEFEN
SE"CHR$(34)"",&H3D00,&H3FDB,&H3D0
0
1000 '
1010 DATA 52, 64, 158, 176, 51,
141, 0, 213, 239, 129
1020 DATA 51, 140, 77, 239, 129,
51, 140, 40, 239, 129
1030 DATA 51, 141, 2, 100, 239,
129, 51, 141, 1, 44
1040 DATA 239, 129, 51, 141, 2,
154, 239, 132, 222, 186
1050 DATA 51, 201, 12, 0, 255, 6
2, 149, 53, 64, 48
1060 DATA 141, 1, 15, 31, 16, 12
6, 180, 244, 141, 34
1070 DATA 90, 39, 248, 166, 140,
38, 68, 204, 2, 128
1080 DATA 37, 3, 204, 40, 0, 164
, 136, 224, 228, 136
1090 DATA 225, 237, 227, 23, 1,
159, 236, 225, 32, 221
1100 DATA 141, 2, 32, 217, 189,
179, 237, 192, 6, 231
1110 DATA 140, 112, 204, 0, 0, 3
9, 20, 158, 186, 68
1120 DATA 86, 48, 139, 204, 240,
15, 37, 3, 204, 0
1130 DATA 255, 164, 132, 228, 1,
237, 132, 182, 255, 35
1140 DATA 132, 247, 183, 255, 35
, 182, 255, 32, 167, 140
1150 DATA 5, 173, 159, 160, 10,
134, 0, 183, 255, 32
1160 DATA 182, 255, 35, 138, 8,
183, 255, 35, 252, 1
1170 DATA 90, 30, 137, 139, 14,
88, 88, 237, 141, 1
1180 DATA 92, 68, 86, 68, 86, 23
7, 140, 181, 158, 186
1190 DATA 68, 86, 48, 139, 204,
15, 240, 37, 3, 204
1200 DATA 255, 0, 170, 132, 234,
1, 237, 132, 108, 140
1210 DATA 13, 39, 10, 204, 14, 1
28, 131, 0, 1, 38
1220 DATA 251, 32, 145, 134, 0,
246, 255, 0, 196, 1
1230 DATA 57, 189, 179, 237, 231
, 140, 24, 128, 2, 167
1240 DATA 140, 29, 237, 140, 33,
196, 3, 134, 13, 61
1250 DATA 48, 140, 42, 48, 133,
167, 10, 76, 167, 1
1260 DATA 204, 0, 9, 132, 60, 61

```

```

, 203, 18, 231, 2
1270 DATA 204, 0, 0, 71, 86, 237
, 6, 204, 0, 0
1280 DATA 84, 84, 231, 140, 1, 1
39, 0, 129, 3, 37
1290 DATA 1, 74, 167, 12, 57, 85
, 0, 0, 0, 12
1300 DATA 0, 0, 0, 1, 0, 0, 0, 0
, 170, 0
1310 DATA 0, 0, 12, 0, 0, 0, 1,
0, 0, 0
1320 DATA 0, 255, 0, 0, 0, 12, 0
, 0, 0, 1
1330 DATA 0, 0, 0, 0, 3, 3, 3, 3
, 3, 3
1340 DATA 52, 96, 49, 141, 0, 14
7, 51, 140, 202, 111
1350 DATA 140, 56, 104, 140, 53,
108, 65, 141, 58, 167
1360 DATA 75, 236, 141, 0, 110,
163, 70, 167, 74, 230
1370 DATA 65, 193, 80, 37, 25, 4
8, 140, 212, 166, 76
1380 DATA 48, 134, 166, 132, 129
, 2, 36, 4, 193, 88
1390 DATA 38, 8, 106, 132, 108,
140, 11, 79, 141, 19
1400 DATA 166, 196, 51, 77, 76,
38, 201, 198, 0, 53
1410 DATA 96, 126, 180, 244, 0,
0, 0, 236, 196, 167
1420 DATA 140, 42, 231, 140, 245
, 236, 66, 237, 140, 45
1430 DATA 236, 68, 237, 140, 48,
230, 140, 37, 68, 86
1440 DATA 68, 86, 68, 86, 158, 1
86, 48, 139, 230, 140
1450 DATA 24, 196, 6, 166, 165,
164, 132, 167, 140, 6
1460 DATA 92, 166, 165, 132, 0,
138, 0, 188, 62, 149
1470 DATA 36, 2, 167, 132, 204,
0, 0, 227, 70, 237
1480 DATA 140, 249, 204, 0, 0, 2
27, 72, 106, 140, 180
1490 DATA 38, 196, 57, 63, 192,
207, 48, 243, 12, 252
1500 DATA 3, 255, 0, 128, 0, 77,
0, 0, 0, 0
1510 DATA 0, 52, 96, 49, 140, 23
3, 51, 140, 238, 48
1520 DATA 72, 204, 1, 0, 237, 13
2, 237, 30, 204, 0
1530 DATA 0, 128, 77, 37, 6, 38,
7, 167, 132, 32
1540 DATA 3, 64, 96, 132, 192, 1
26, 37, 6, 38, 7
1550 DATA 231, 30, 32, 3, 80, 96
, 30, 231, 65, 231
1560 DATA 140, 1, 129, 0, 39, 48
, 37, 6, 48, 30
1570 DATA 167, 65, 30, 137, 77,
39, 37, 231, 140, 13
1580 DATA 231, 140, 14, 198, 128
, 231, 140, 11, 95, 72
1590 DATA 37, 4, 129, 0, 37, 4,
128, 0, 203, 0
1600 DATA 100, 140, 252, 36, 240
, 166, 132, 74, 39, 2
1610 DATA 76, 80, 237, 132, 108,
65, 23, 255, 54, 142
1620 DATA 162, 0, 232, 128, 202,
2, 247, 255, 32, 134
1630 DATA 128, 74, 38, 253, 140,
162, 32, 38, 239, 230
1640 DATA 65, 23, 255, 31, 53, 2
24, 23, 255, 118, 48
1650 DATA 141, 254, 154, 79, 76,
167, 140, 37, 236, 10
1660 DATA 224, 141, 255, 121, 37
, 32, 192, 1, 34, 28
1670 DATA 231, 140, 14, 160, 141
, 255, 109, 37, 19, 129
1680 DATA 6, 34, 15, 68, 74, 71,
138, 0, 167, 140
1690 DATA 3, 141, 31, 204, 0, 0,

```

Listing continued



```

32, 11, 48, 13
1700 DATA 166, 140, 248, 129, 3,
38, 203, 79, 95, 126
1710 DATA 180, 244, 189, 179, 23
7, 134, 13, 61, 48, 141
1720 DATA 254, 85, 48, 133, 52,
96, 49, 141, 255, 19
1730 DATA 51, 132, 79, 230, 65,
23, 254, 193, 111, 74
1740 DATA 53, 224, 999

```

## Pie in the Sky

```

10 CC=0
20 POKE65495,0
60 CLEAR6000
65 FORX=1TO15:BS$=BS$+CHR$(8):NE
XTX
70 PMODE4,1
80 DIMD(23),A$(10),S$(23),S(23),
P(23),L$(64):GOSUB1000
90 GOTO780
190 CLS
200 PRINT"NUMBER OF SECTORS (1-2
2)":INPUT S:IF S>22 THEN 200
201 S$(0)="SEC/SUBJECT### AMOU
NT"
202 PRINTS$(0)
210 FORX=1TOS
220 PRINT "+CHR$(X+64)+". ":LI
NE INPUT S$(X)
230 PRINTBS$:INPUTS(X)
240 NEXTX
271 PRINT"input SUBJECT FOR THE
GRAPH":LINEINPUTSB$
272 IPS<21THENPRINT"INPUT A NOTE
OR PRESS ENTER":LINEINPUTNT$
280 IF S=0 THEN RUN ELSE PCLS1:S
CREEN1,SC:GP=1:COLOR2,1
281 IF S>20 THEN NT$=""
290 CIRCLE(200,70),40:CIRCLE(236
,128),14
295 C=0
300 FORX=1TOS:C=C+S(X):NEXTX
310 FORX=1TOS
320 P(X)=S(X)*100/C:D(X)=P(X)
330 NEXTX:C=0
331 FORX=1TOS:A=10-LEN(S$(X)):IF
A<0THENS$(X)=LEFT$(S$(X),10):A=0
332 S$(X)=S$(X)+STRING$(A,32):NE
XTX
340 FORX=1TOS
350 C=C+P(X)
360 P(X)=C:NEXTX
370 PI=ATN(1)*4
380 FORX=1TOS
390 T=P(X)-50
400 A=(2*PI)*T/100
410 LINE(200,70)-(40*SIN(A)+200,
40*COS(A)+70),PSET:LINE(236,128)
-(12*SIN(A)+236,12*COS(A)+128),P
SET
411 T=(P(X)-(D(X)/2))-50
412 IFD(X)>8THENK=28ELSEK=46
413 A=(2*PI)*T/100
414 DRAW"BM"+STR$(INT(K*SIN(A)+1
99))+", "+STR$(INT(K*COS(A)+68))+
"C"+STR$(F)+L$(X+64-32)
420 NEXTX
421 X=LEN(SB$)*8:X=255-X
422 IFX<0THENX=0
430 DRAW"BM"+STR$(INT(X/2))+",0;
C2"
435 IFSB$=""THEN475
441 FORX=1TOLEN(SB$)
450 DRAWL$(ASC(MID$(SB$,X,1))-32
)
460 DRAW"BR4BU7"
470 NEXTX
475 IFS<16THENC=40ELSECD=14
480 DRAW"BM",+STR$(CD)+",C2"
490 FORX=1TOS
500 DRAWL$(X+64-32)+"BR4R1BR8BU7

```

```

"
505 IFS$(X)=""THEN500
510 FORA=1TOLEN(S$(X))
530 DRAWL$(ASC(MID$(S$(X),A,1))-
32)
540 DRAW"BR4BU7"
550 NEXTA:IFLEN(STR$(INT(D(X))))
=2THENDRAW"BD7BR4BU7BR4"+L$(ASC(
"0")-32)+"BU7BL4":CL=1:IFLEN(STR
$(INT(D(X))))=2ANDINT(D(X))=0THE
NDRAW"BD7BR4BU7BR4"+L$(ASC("0")-
32)+"BU7BL4":CL=2
551 D=D(X)*100:D=INT(D):D=D/100:
L$=STR$(D):FORC=1TO6-CL:A$=MID$(
L$,C,1):IFA$=""ANDFF=0THENA$=CHR
$(64+32):FF=-1ELSEIFA$=""THENA$=
"0"
552 IFA$=""THENA$=CHR$(64+32):D
RAWL$(ASC(A$)-32)+"BR4BU7"ELSEDR
AWL$(ASC(A$)-32)+"BR4BU7"
553 NEXTC:DRAWL$(ASC("0")-32):FF
=0:CL=0
560 DRAW"BM",+STR$(CD+X*8)
570 NEXTX:L=CD+X*8:IFL<155THENL=
155
571 IFNT$=""THEN580
572 X=LEN(NT$)*8:X=255-X:IFX<0TH
ENX=0:DRAW"BM"+STR$(INT(X/2))+",
"+STR$(L)ELSEDRAW"BM"+STR$(INT(X
/2))+", "+STR$(L)
573 FORX=1TOLEN(NT$)
574 DRAWL$(ASC(MID$(NT$,X,1))-32
)
575 DRAW"BR4BU7":NEXTX
580 A$=INKEY$
590 A$=INKEY$:IF A$=""THEN590ELS
E780
780 POKE65495,0:CLS:PRINT"*****
*****"
PEICES OF PIE *****
*****"
790 CC=-1:PRINT"CHOOSE ONE: 1.C
REATE A FILE 2.S
AVE TO TAPE 3.L
OAD FROM TAPE 4.E
DIT SECTORS 5.C
HANGE SUBJECT 6.C
HANGE NOTE ** 7.E
XAMINE GRAPH"
795 INPUTA
810 ON A GOTO190,820,860,2000,30
00,4000,280
820 IF S=0 THEN RUN ELSE POKE654
94,0:CLS:PRINT"*****
*****"
SAVE TO
TAPE"
830 PRINT:PRINT"INPUT AN EIGHT L
ETTER NAME FOR YOUR GRAPH '123
45678' "
LINEINPUTA$
840 OPEN"O",#-1,A$:PRINT"SAVING
"A$
850 PRINT#-1,S:FORX=1TOS:PRINT#-
1,S$(X),S(X):NEXTX:PRINT#-1,SB$,
NT$:CLOSE#-1:GOTO780
860 POKE65494,0:CLS:PRINT"*****
*****"
LOAD FROM TAPE"
870 PRINT:PRINT"WHAT IS THE NAME
OF THE FILE":LINEINPUTA$
880 OPEN"O",#-1,A$:PRINT"LOADING
"A$
890 INPUT#-1,S
900 FORX=1TOS:INPUT#-1,S$(X),S(X
):NEXTX:INPUT#-1,SB$,NT$:CLOSE#-
1:GOTO780
910 INPUT#-1,S$(X),S(X)
920 X=X+1:GOTO900
930 S=X-2:SB$=S$(X-1):NT$=S$(X)
940 CLOSE#-1:GOTO780
1000 FOR X=65-32 TO 96-32:READ L
$(X):NEXT X
1010 DATA BD2D4U4R1U1R1U1D1R1D1R
1D2NL4D2BD1
1030 DATA R3D1R1D1L1D1L3NU3D3R3U
1R1U1BD3
1050 DATA BD1R1L1R1U1R2D1R1BD4L1
R1L1D1L2U1L1U4BR4BD6

```

```

1070 DATA R3D1R1D4L1D1L3U6BD7BR
4
1090 DATA NR4D3NR2D3R4BD1
1110 DATA NR4D3NR2D3BR4BD1
1130 DATA BD1R1L1R1U1R2D1R1BD3L2
R2D1L1D1L2U1L1U4BD6BR4
1150 DATA D3R4NU3D3BL4U3BD4BR4
1170 DATA BR2L1R1L2R1D6L1R2BR1BD
1BR1
1190 DATA BR3L1R1L2R1D6L1U1L1BD2
BR4
1210 DATA D6U3R1U1R1U1R1U1R1BD3B
U3D1R1D1R1D1R1BD1
1230 DATA D6R4BD1
1250 DATA ND6D1R1D1R1D1U1R1U1R1U
1D6BD1
1270 DATA ND6D1R1D1R1D2R1D1R1U5D
6BD1
1290 DATA BD1R1U1R2D1R1D4L1D1L2U
1L1U4BD6BR4
1310 DATA ND6R3D1R1D1L1D1L3BD4BR
4
1330 DATA BD1R1U1R2D1R1D4L1D1L2U
1L1U4BD4BR1D1U1D1R1D1R1BR1
1350 DATA ND6R3D1R1D1L1D1L2R1D1R
1D1R1D1L1BR1BD1
1370 DATA BR4BD1L1R1L1U1L2D1L1D1
R1D1R2D1R1D1L1D1L2U1L1BD2BR4
1390 DATA R4L2D6BD1BR2
1410 DATA D5R1D1R2U1R1U5BD7
1430 DATA D4R1D1R1D1U1R1U1R1U4BD
7
1450 DATA D6U1R1U1R1U1D1R1D1R1D1
NU6BD1
1470 DATA D1R1D1R2U1R1U1BL2BD3L1
D2L1D1BR2BU3R1D2R1D1BD1
1490 DATA D1R1D1R2U1R1U1BL2BD3D3
BR2BD1
1510 DATA R4D1L1D1L1D1L1D1L2R4
BD1
1511 DATA NR3D6R3BR1BD1
1512 DATA D1R1D1R1D2R1D1R1D1BD1
1513 DATA BR1R3D6L3BR3BD1
1514 DATA BR2D6U6D1L1D1L1R3U1D1R
1BD5
1515 DATA BD3R4L4R1U1D2R1D1U4BR2
BD6
1516 DATA BD6BL2R1BD1BL1
1520 FOR X=48-32 TO 57-32:READ L
$(X):NEXT X
1530 DATA BD1D4R1D1R2U1R1U4L1U1L
2D2R1D2R1D2BR1BD1
1540 DATA BD1BR1R1L1R1U1D6L2R4BD
1
1550 DATA BD1R1L1R1U1R2D1R1D1L1D
1L2D1L1D2R4BD1
1560 DATA BD1R1L1R1U1R2D1R1D1L1D
1L2R2D1R1D1L1D1L3BR4BD1
1570 DATA BR2R1L1D1L1D1L2R4L1U
4D6BR1BD1
1580 DATA NR4D2R3D1R1D2L1D1L2U1L
1BD1BR4BD1
1590 DATA BR3L2D1L1D4R1D1R2U1R1U
1L1U1L3BD3BR4BD1
1600 DATA ND2R4D2L1D1L1D1L1D1L1D
1BR4BD1
1610 DATA R4D2L1D1L2U1L1U2BD6NR4
U2R1U1R2D1R1D2BD1
1620 DATA BD1R1L1R1U1R2D1R1D2L3U
1L1BD3R1L1R1D1R2U1R1U2BD3BD1
1630 FOR X=32-32 TO 47-32:READ L
$(X):NEXT X
1640 DATA BD7BR4
1650 DATA BR2D1U1D4BD3U1BR2
1660 DATA BR1D3BR2U3D3BD5BR1
1670 DATA BR1D1U1D6U2L1R4L1U4D2R
1L4R3D4BR1BD1
1680 DATA BR2D1U1D6BR2BU5L4D2R4D
2L4BR4BD2
1690 DATA D1U1BR4D1L1D1L1D2L1D1L
1D1BR4U1D1BD1
1700 DATA NR3D1R1D1R1U1R1L1D4L2U
2D2R4U1D1L1D1BD1BR1
1710 DATA BR2D3BD4BR2
1720 DATA BR1R2L2D1L1D4R1D1R1BD1
BR1
1730 DATA BR1R1L1R1D1R1D4L1D1L2B
R3BD1

```



```

1740 DATA D1R1D1R2U1R1U1BL2BD3L1
D2L1D1BR2BU3R1D2R1D1BL2U6D6U3L2R
4BD4
1750 DATA BR2BD1D1U1D4U2R2L4BR4B
D4
1760 DATA BR2BD5D1U1D1L1D1BR3
1765 DATA BD3BR1R2L2BD4BR3
1770 DATA BR2BD5D1BD1BR2
1780 DATA BR4D1U1D1L1D1L1D2L1D1L
D1BR4BD1
1790 FOR X=58-32 TO 64-32:READ L
$(X):NEXT X
1800 DATA BR1BD1D1R1U1L1BD3D1R1U
L1L1BD3BR3
1810 DATA BR1BD1D1R1U1L1BD4D1R1U
L1L1D1R1D1BR2
1820 DATA BR3D1U1D1L1D1L1D1L1R1D
1R1D1R1D1BD1BR1
1830 DATA BR1BD2R2L2BD2R2L2BD2BR
3BD1
1840 DATA BR1D1U1D1R1D1R1D1R1L1D
L1L1D1L1D1BD1BR3
1850 DATA BD1D1U1R1U1R2D1R1D1L1D
L1L1BD1D1BR2BD1
1860 DATA BR1R2L2R2D1R1D4L1D1L2U
L1U2R1U1R1D1R1L1D1R1L1D1R1L1D1B
D1BR2
1870 RETURN
2000 IFS=0 THEN RUN ELSE PRINT "++
++++"
SECTOR EDIFICATION"
2001 SS(0)="SEC/SUBJECT### AMO
UNT"
2030 FORX=1TO1500:NEXTX
2040 B=1
2046 A=32
2050 IFS>14THENE=14ELSEE=S
2051 IFGF=-1THENG=F:GOTO2060
2055 CLS
2060 PRINT@,"";
2061 IFB<1THENG=F:-1:GOTO2040
2062 IFE>S THENE=E-1:B=B-1
2063 IFS<15THENCLS
2069 PRINTSS(0)
2070 FORX=B TOE
2080 PRINT " "+CHR$(X+64)+" " +S$(
X);
2090 PRINTTAB(17)"?";S(X)
2095 NEXTX
2100 PRINT@A,CHR$(128);
2110 A$=INKEY$:IFA$=" "THEN2110
2111 IFA$=CHR$(12)THEN700
2112 IFA$="D"THEN2200
2113 IFA$="A"ANDE=S THEN2230ELSE
IFA$="I"ANDE=S THEN 2230
2115 PRINT@A,CHR$(32);
2120 IFA$=CHR$(10)THENA=A+32:IFA
>448THENA=A-32:B=B+1:E=E+1:GOTO2
060
2130 IFA$=CHR$(94)THENA=A-32:IFA
<32THENA=A+32:B=B-1:E=E-1:GOTO20
60
2135 IFA$=CHR$(9)THEN2160
2140 IFA>(S*32)THENA=A-32
2150 GOTO2100
2160 A=A+3
2165 X=PEEK(A+1022)-64
2170 PRINT@A,CHR$(32);
2180 LINEINPUT SS$(X):PRINTBSS$;:I
NPUTS(X)
2190 A=A-3:GOTO2060
2200 X=PEEK(A+1025)-64
2210 FORD=X TO5
2220 SS$(D)=SS$(D+1):S(D)=S(D+1):N
EXTD:S=S-1:SS$(0)="SEC/SUBJECT###
AMOUNT":IFE>STHENIFS<15THENE=
E-1:B=1:A=A-32ELSEB=B-1:E=E-1
2221 IFS=14THENA=448
2222 IFA=0THENA=32
2223 IFS=0THENRUN
2224 GOTO2060
2230 GOSUB2280:IF X+LP>23 THEN 2
060
2231 X=X-1:FORLL=1TOLP:X=X+1
2240 S=S+1:PRINT@A,CHR$(32);:A=A
+32:PRINT@A,"";
2250 PRINTCHR$(128)+CHR$(X+64)+"

```

```

.":LINEINPUTSS$(X)
2260 PRINTBSS$;:INPUTS(X)
2265 IFA=480THENA=448
2266 IFS<15THENE=E+1ELSEB=B+1:E=
E+1
2270 NEXT LL:GOTO2060
2280 FORLP=1TO100:A$=INKEY$:IFVA
L(A$)>0ANDVAL(A$)<10THENLP=VAL(A
$):RETURNELSENEXTLP:LP=1:RETURN
3000 IF S=0 THEN RUN ELSECLS:PRI
NT"*****"
3001 PRINT "CHANGE SUBJECT FROM.
..
3010 PRINT:PRINT:PRINTBSS$;
3020 PRINT:PRINT"TO"
3030 LINEINPUTBSS$
3040 GOTO780
4000 IF S=0 THEN RUN ELSE IFS>20
THENPRINT"NO ROOM FOR A NOTE":FO
RT=1TO1000:NEXTT:GOTO780
4010 CLS:PRINT"*****"
4020 PRINT "CHANGE NOTE FROM..."
4030 PRINTNT$
4040 PRINT"TO"
4050 LINEINPUTNT$
4060 GOTO780

```

## Investment Analysis

```

10 DIM A(15),PV(15),CV(15)
15 CLS(0)
20 PRINT "NET PRESENT VALUE COMP
UTATION"
25 PRINT "BY DEV CHAKRAVARTY"
26 PRINT " "
30 PRINT "NET PRESENT VALUE (NPV
) CONCEPT":PRINT " "
31 PRINT"WHEREVER PROMPT INDICAT
ES ":PRINT"PRESS Y' PRESS Y AND
THEN":PRINT"HIT ENTER KEY"
32 PRINT " ":INPUT "PRESS Y TO C
ONTINUE";M$
34 IF M$="Y" THEN 40 ELSE GOTO 2
0
40 PRINT "$100 AVAILABLE TODAY I
S WORTH"
43 PRINT "MUCH MORE THEN $100 AV
AILABLE"
46 PRINT "AFTER FIVE YEARS BECAU
SE OF THE"
49 PRINT "ERODING VALUE OF MONEY
CAUSED"
52 PRINT"MAINLY BY INFLATION"
53 INPUT "PRESS Y TO CONTINUE";M
$
54 IF M$="Y"THEN55 ELSE GOTO 20
55 CLS:PRINT"THIS PROGRAM ALLOWS
THE DECISION"
58 PRINT"MAKER TO TAKE THIS INTO
ACCOUNT"
59 PRINT"WHEN MAKING INVESTMENT
DECISIONS"
60 PRINT"WHICH REQUIRE CASH INVE
STMENTS"
63 PRINT"INITIALLY AND PAY BACK
SUMS"
66 PRINT"IN FUTURE YEARS. NPV EX
PRESSES"
69 PRINT"THESE FUTURE AMOUNTS IN
PRESENT"
70 PRINT"TERMS AND SETS THIS AMO
UNT OFF"
73 PRINT"AGAINST THE INITIAL CAS
H OUTLAY"
76 PRINT"IF THE NPV IS POSITIVE
IT IS "
79 PRINT"PROBABLY WORTH INVESTIN
G IN"
85 INPUT "PRESS Y TO CONTINUE";M
$

```

```

100 ZERO = 0
102 CLS(0)
110 FOR U = 1 TO 15
120 A(U) = ZERO
130 PV(U) = ZERO
140 CV(U) = ZERO
150 REM
200 PRINT "THE PROGRAM HANDLES C
ASH FLOWS"
210 PRINT "FOR ONLY 15 YEARS.ENT
ER A "
220 PRINT "NUMBER BETWEEN 1 AND
15"
230 PRINT "REPRESENTING NUMBER O
F YEARS"
240 PRINT "FOR WHICH YOU CAN EST
IMATE"
245 PRINT "CASH FLOWS"
250 INPUT YEAR
255 INPUT "INITIAL CASH INVESTME
NT $";INITIAL
260 FOR X = 1 TO YEAR
270 PRINT "ENTER CASH FLOW FOR Y
EAR"X"$"
300 INPUT A(X)
310 NEXT X
320 INPUT "ENTER DISCOUNT RATE O
R MARKET RATE OF INTEREST";R
330 R = R/100
340 TEMP = 1 + R
350 REM
380 REM BEGIN CALCULATIONS
400 SUM = 0
410 FOR X = 1 TO YEAR
420 GOSUB 2000
430 CV(X) = A(X) * PV(X)
440 SUM = SUM + CV(X)
450 NEXT X
460 REM
470 NETPV = SUM - INITIAL
480 PRINT "NET PRESENT VALUE IS
$"NETPV
490 INPUT "PRESS Y TO SEE NPV CO
MPUTATION";N$
500 IF N$="Y"THEN GOSUB 3000
550 PRINT "NOW PROCEED TO IRR CA
LCULATION"
552 INPUT "PRESS Y TO CONTINUE";
C$
553 IF C$="Y"THEN 554
554 CLS(0)
560 PRINT"INTERNAL RATE OF RETUR
N IRR"
565 PRINT"GIVES THE MINIMUM DISC
OUNTING"
570 PRINT "RATE THAT YIELDS A PO
SITIVE"
575 PRINT"NPV"
576 PRINT "WAIT!THE PROGRAM IS W
ORKING"
600 REM CALCULATION OF IRR
610 XYZ = 1.30
620 TEMP = XYZ
630 REM
640 FOR Q=1 TO 30
650 SUM = ZERO
660 TEMP = TEMP -0.01
670 REM
680 FOR X = 1 TO YEAR
690 GOSUB 2000
700 CV(X) = A(X)*PV(X)
710 SUM=SUM+CV(X)
720 NEXT X
730 REM
740 NETPV = SUM - INITIAL
750 IF NETPV > 0 THEN GOTO 1000
760 NEXT Q
770 IF NETPV < 0 THEN GOTO 1050
1000 REM OUTPUT SECTION
1010 IRR = (TEMP-1)*100
1020 PRINT " ":PRINT "THE IRR IS
"IRR"%
1030 GOTO 1100
1050 PRINT "THE PROJECT HAS A NE
GATIVE RATE OF RETURN"
1100 INPUT "IF YOU WANT TO CONTI
NUE TYPE Y"; ANS$
1110 IF ANS$ = "Y" THEN 100

```

Listing continued



```

1500 END
1600 REM
2000 REM SUBROUTINE CALCULATES P
RESENT VALUE
2010 PV(X) = 1
2020 FOR Z = 1 TO X
2030 PV(X) = TEMP * PV(X)
2040 NEXT Z
2050 PV(X) = 1/PV(X)
2060 RETURN
3000 REM SUBROUTINE DISPLAYS COM
PUTAION
3010 CLS(0)
3020 FOR X=1 TO YEAR
3030 PRINT "YEAR" X "CASH INFLO
W"(X)
3040 PRINT "AMOUNT IN TODAY'S TERM
S $(CV(X)
3042 INPUT "PRESS Y TO CONTINUE
":N$
3043 IF N$="Y" THEN 3045
3045 NEXT X
3050 PRINT "LESS INITIAL OUTLAY $
"INITIAL
3060 PRINT "NPV IS $(NETPV
3070 RETURN

```

## Fabulous Fonts for the Gemini-10X

Program Listing. Fabulous Fonts

```

10 GOTO560:'DLCSET: G-10X DOWNLO
AD CHR$
20 CLEAR500, &H3A4A:US=CHR$(239):
LS=CHR$(13):CT$=CHR$(27)+CHR$(42
)+CHR$(1):SS=&H400:J2=0:J3=J2:L0
=&H3A4B:L9=L0+960:CLS0:PRINT0169
,"CLEARING MEMORY":FORI=L0 TOL9
STEP10:POKEI,255:NEXT
30 CLS:INPUT"ready printer":AS:B
=300:FORI=1TO6:READBAUD(I):PRINT
I:">":B:B=B*2:NEXT:INPUT"BAUD (1
-6)":B:IFB>0THENPOKE150,BAUD(B)
40 PRINT#-2,CHR$(27):"e":
50 INPUT"J>OYSTK OR K>EYBD":AS:I
FA$="J"THENLM=255:K7=9/64:K6=6/6
3ELSELM=0
60 GOSUB520
70 LL=32*Y+X:L=SS+LL:Z=PEEK(L):P
RINT0LL,US,:POKEI,Z
80 IFLM THENX=INT(JOYSTK(0)*K7):
Y=INT(JOYSTK(1)*K6)
90 AS=INKEY$:IFAS=" "THEN70ELSEIF
LM THEN140ELSEA=ASC(AS)
100 IFA=9THENX=X-(X<8):GOTO70
110 IFA=8THENX=X+(X>0):GOTO70
120 IFA=10THENY=Y-(Y<6):GOTO70
130 IFA=94THENY=Y+(Y>0):GOTO70
140 IFA$="D"THEN310
150 IFA$="S"THENPOKE128,GOSUB3
20:GOTO70
160 IFA$="R"THENPOKE110,GOSUB3
20:GOTO70
170 IFA$="C"THEN60
180 IFA$="Q"THENTOP
190 IFA$="L"THEN480
200 IFA$="W"THEN490
210 IFA$="V"THEN390
220 IFA$="T"THENPRINT#-2,CHR$(27
):CHR$(36):CHR$(1):AS=" ":FORI=3
2TO128:AS=AS+CHR$(I):NEXT:PRINT#
-2,AS:GOTO60
230 IFA$<>"P"THEN280
240 PRINT075,"PROGRAMMING PRINTE
R":PRINT#-2,CHR$(27):CHR$(42):C
HR$(0):L=L0:AS=STRING$(10,32):J
=VARPTR(AS):J2=J+2:J3=J+3:POKEJ,
10:FORI=32TO128
250 IFPEEK(L)=255THEN270
260 X=INT(L/256):POKEJ2,X:POKEJ3
,L-X*256:PRINT#-2,CT$:CHR$(I):AS
:
270 L=L+10:NEXT:GOTO60

```

```

280 IFA$<>"U"THEN70
290 GOSUB440:FORX=0TO8:L=L+1:POK
EL,V(X):NEXT
300 GOTO60
310 GOSUB 440:FORX=0TO8:PRINT032
0,STRING$(22,32):PRINT0320,"COL
. "X":INPUTH:L=L+1:POKEH,H:NEXT:
PRINT0320,STRING$(30,32):GOTO40
0
320 M=1:H=0:R=X+SS
330 FOR C=0TO6
340 IFPEEK(R)=128THENH=H+M
350 R=R+32:M=M*2:NEXT:V(X)=H
360 GOSUB380
370 RETURN
380 HS=RIGHT$(0+HEX$(H),2):PRI
NT0256+X,LEFT$(HS,1):PRINT0288+
X,RIGHT$(HS,1):RETURN
390 GOSUB520:GOSUB460:IFPEEK(L)=
255 THENPRINT0339,"UNDEFINED":G
OTO90
400 FORX=0TO8:L=L+1:H=PEEK(L):M=
1:FORY=0TO6
410 IF(H AND M)>0 THENPOKEY*32+X+
SS,128
420 M=M*2:NEXT:V(X)=H:GOSUB380:N
EXT:X=0:Y=X:PRINT0320,"":I
FPEEK(L-9)=0THENPRINT"NO ":ELSEP
RINT"":
430 PRINT"DESCENDERS":GOTO90
440 GOSUB450:POKEH,D:RETURN
450 PRINT0320,STRING$(30,32):PRI
NT0320,"DESCENDERS ":INPUTAS:IF
AS="Y"THEN D=1 ELSE D=0
460 PRINT0320,"ENTER CHARACTER:"
:LINEINPUTAS:IFLEN(AS)=4ANDLEFT
$(AS,2)=""&H"THENAC=VAL(AS)ELSEIF
LEN(AS)=1THENAC=ASC(AS)ELSE460
470 IFAC<0THEN460ELSEL=L0+(AC-32
)*10:RETURN
480 GOSUB500:LOADM FF$:GOTO60
490 GOSUB500:SAVEM FF$,L0,L9,0:G
OTO60
500 PRINT0320,"CURRENT NAME":FF
$:INPUT"NEW NAME":AS:IFA$<>"THE
NFF$=AS
510 IF FF$=""THEN500ELSERETURN
520 CLS:FOR X=0TO6:V(X)=0:PRINTS
TRING$(9,"."):CHR$(255):NEXT:V(7
)=0:V(8)=0:PRINT019,"GEMINI":PR
INT046,"CUSTOM-DESIGNED":PRINT0
81,"CHARACTERS":PRINT0320,"use
cursor":
530 PRINT0384,"<S>ET <R>ESET <U>
PDATE <C>LS"LS"<D>IRECT ENTRY <Q
>UIT <V>IEW"LS"<P>ROGRAM <L>OAD
<W>RITE <T>EST"
540 FOR C=224TO233:PRINT0C,CHR$(
255):NEXT:X=0:Y=X:RETURN
550 DATA180,87,41,18,7,1
560 PCLEAR1:GOTO20

```

## How Your CoCo Adds Up

Program Listing 1. Binary OR Drill

```

10 DIM A1(7),A2(7),AN(7)
20 CLS
30 PRINT011,"BINARY OR"
40 H1=NRD(256)-1:H2=NRD(256)-1
50 HX=H1
60 FOR B=7TO0STEP-1
70 GOSUB440
80 A1(B)=INT(HX/B1)
90 HX=HX-(A1(B)*B1)
100 NEXT
110 HX=H2
120 FOR B=7TO0STEP-1
130 GOSUB440
140 A2(B)=INT(HX/B1)
150 HX=HX-INT(A2(B)*B1)
160 NEXT

```

```

170 PRINT069,A1(7);
180 FOR I=6TO0STEP-1
190 PRINT A1(I);
200 NEXT
210 PRINT098,"OR";
220 PRINT0131,"-----"
";
230 PRINT0101,A2(7);
240 FOR I=6TO0STEP-1
250 PRINT A2(I);
260 NEXT
270 FOR I=0TO7
280 PRINT0187-3*I,CHR$(128);
290 AS=INKEY$:IF AS=""THEN290
300 IF(AS<>"0")AND(AS<>"1")THEN2
90
310 AN(I)=VAL(AS)
320 PRINT0187-3*I,AS;
330 NEXT
340 A=0
350 FOR B=0TO7
360 GOSUB440
370 A=A+(AN(B)*B1)
380 NEXT
390 IF A<>(H1 OR H2)GOTO420
400 PRINT0296," RIGHT! "
;
410 FOR I=1TO1000:NEXT:GOTO20
420 PRINT0296,"WRONG,TRY AGAIN "
;
430 GOTO270
440 IF B=0 THEN B1=1:RETURN
450 B1=1
460 FOR J=1TO B:B1=2*B1:NEXT
470 RETURN

```

Program Listing 2.

Hexadecimal Addition Drill


```

10 CLS
20 PRINT010,"HEX-ERCISE"
30 PRINT041,"BYTE ADDITION"
40 B1=NRD(128)-1:B2=NRD(128)-1
50 M1=INT(B1/16):L1=B1-(M1*16)
60 M2=INT(B2/16):L2=B2-(M2*16)
70 IF L1<10THEN PRINT0142,STR$(L
1):GOTO90
80 PRINT0143,CHR$(L1+55);
90 IF M1<10THEN PRINT0141,STR$(M
1):GOTO110
100 PRINT0141,CHR$(M1+55);
110 PRINT0172,"+ ";
120 IF L2<10THEN PRINT0174,STR$(
L2):GOTO140
130 PRINT0175,CHR$(L2+55);
140 IF M2<10THEN PRINT0173,STR$(
M2):GOTO170
150 PRINT0173,CHR$(M2+55);
160 PRINT0172,"+ ";
170 PRINT0204,"----";
180 PRINT0239,CHR$(128);
190 AS=INKEY$:IF AS=""THEN190
200 PRINT0239,AS;
210 PRINT0238,CHR$(128);
220 BS=INKEY$:IF BS=""THEN220
230 PRINT0238,BS;
240 IF(AS<"0")OR(AS>"F")THEN350
250 IF(BS<"0")OR(BS>"F")THEN350
260 IF AS<"9"THEN A=VAL(AS)
270 IF AS>"A"THEN A=ASC(AS)-55
280 IF BS<"9"THEN B=VAL(BS):GOT
0310
290 IF BS>"A"THEN B=ASC(BS)-55:
GOTO310
300 GOTO350
310 AN=A+(16*B)
320 IF AN<>(B1+B2)THEN350
330 PRINT0296," RIGHT! "
;
340 FOR I=1TO1000:NEXT:GOTO10
350 PRINT0296,"WRONG,TRY AGAIN";
:GOTO180

```



## 2nd Generation !!!!! HDS Floppy Drive Controller Board

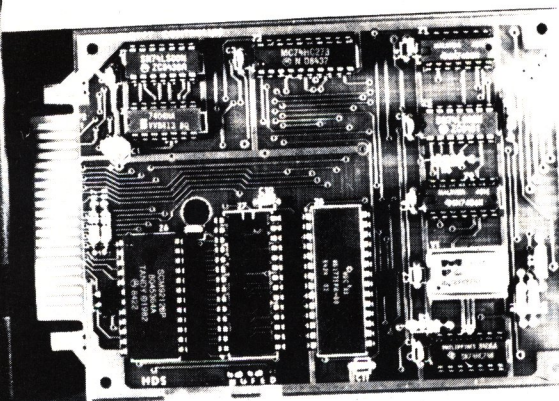

AS SEEN AT THE RADIO SHACK  
COMPUTER SHOWCASES

### Features\*

- \* Gold Plated Edge Cards
- \* Dual Selectable ROM Sockets
- \* No POTS to adjust
- \* Compatible with COCO I & II
- \* 120 Day Warranty
- \* Double and Single Density

So what's so new in our second generation? We had a lot of requests for the need to use the lessor expensive 28 pin Eproms. Our 2nd generation controller allows the useage of either (two 24pin ROMS), or (one 24pin ROM and one 28pin ROM). The second feature we added was a technical one and is not apparent to the average user. Western Digital was good enough to manufacture for us a far advanced drive controller chip, called the WD1773FDC. This chip integrates the data separation method within itself allowing the cleanest data transfer to date.

Reduce your I/O errors with the Hard Drive Specialist Floppy Drive Controller for the Color Computer Gold Edge Card Connectors. Advanced Design, and the absence of potentiometers make this the best board available to date.

**Completed and Tested Board with  
Radio Shack ROM** ..... \$139.  
(Includes Case, and DOS Instructions)

**Completed and Tested Board  
without ROM** ..... \$119  
(Includes Case)

**Bare Board with instruction  
manual** ..... \$ 40.

**Parts Kit For Bare Board without  
ROM** ..... \$ 40.

**Radio Shack ROM** ..... \$ 20.

New Low Prices!

### DISK DRIVE SYSTEMS

	SINGLE SIDED	DOUBLE SIDED
Drive 0 Complete .....	\$249.	\$289.
Drive 1 Complete .....	\$169.	\$209.
Drive 0 & 1 Dual Drive .....	\$399.	\$479.

64K UPGRADE KIT ..... \$39.95

### NEW ROM


HDS has licensed the ROM from Radio Shack to be able to offer alternative operating systems pre-blown ready for installation. The first of what we hope to be a wide range of options is ADOS. ADOS is a product of SpectroSystems of Miami Florida and is fully supported by the author. The HDS version of ADOS supports 2 drives, 40 track, 6ms trk-to-trk drives only, either Single Sided or Double Sided. The ADOS package comes complete with original documentation and diskette from SpectroSystems and can be installed in our Drive Controller Board at purchase time for no additional charge.

**ADOS/HDS 24 pin ROM** ..... \$ 50.  
(useable in all drive controllers on the market)

**ADOS/HDS 28 pin ROM** ..... \$ 40.  
(useable in the HDS 2nd generation board only)

### Keytronics Keyboard KB500

The Fantastic Keytronic Keyboard is now being manufactured only for Hard Drive Specialist. It is the only keyboard for the Color Computer known on the market that does not use membrane switches. The KB500 uses a capacitance foam switch. This type of switch will never give keyboard bounce and last much longer than all other types. The KB500 is also the only keyboard that will fit all versions of the color computer whether it is a A, B, C, D, E, F, ET, TDP-100, COCO IIA, or COCO IIB. One keyboard fits all with out risk of getting the wrong version, and there is no need to do any modifications to your case. Additional features include a higher spring force on the break and clear key to reduce the possibility of a disastrous key-stroke, sculptured keys, low profile, "pips" on home row keys. The "PF" function key comes with documentation and a sample program. The Keytronics/HDS keyboard list price was \$89, when it was offered through Keytronics. **Our price on it is only \$69,** plus \$3. for shipping.

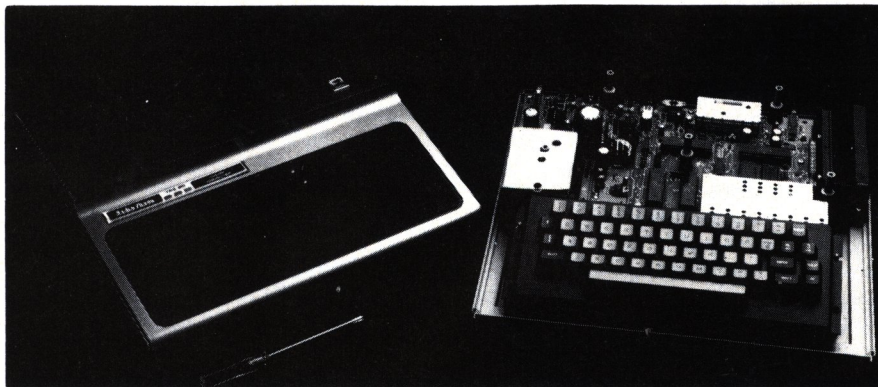

## HARD DRIVE SPECIALIST

Circle Reader Service card #455

1-713-480-6000

Order Line 1-800-231-6671

16208 Hickory Knoll,  
Houston, Texas 77059

### Ordering Information

Use our Watts line to place your order via Visa, MasterCard, or Wire Transfer. Or mail your payment directly to us. Any non-certified funds will be held until proper clearance is made. COD orders are accepted as well as purchase orders from government agencies. Most items are shipped off the shelf with the exception of hard drive products that are custom built. UPS ground is our standard means of shipping unless otherwise specified. Shipping costs are available upon request.



## 16K to 32K Piggyback—Moderate

This upgrade applies to all CoCos, but note that the CoCo 2 uses different chips.

If you shop, you can get a set of 64K RAM chips for under \$30, so this upgrade makes sense only if you received the 16K chips free. This modification requires soldering, preferably with the memory chips outside of your machine. The original CoCos require 4116 dynamic RAM chips, and the CoCo 2 requires 2118 dynamic RAMs.

Open the CoCo. To be on the safe side, first remove the original RAM chips and replace them with the ones you plan to piggyback. If they prove to be good, proceed as follows: Place the original chips in a piece of conductive foam in approximately the same configuration as they go in the board.

With each of the new chips, gently bend pin 4 straight up (the fourth pin down from the notch on the left side) using long-nose pliers. Gently squeeze the remaining pins inward a small amount so that when placed over a chip in the foam, it will hug it and not fall off. With the exception of pin 4, solder each pin of the new chip to the corresponding pin of the chip beneath it.

Caution: Do not use excessive amounts of solder or hold the iron too long. Solder a piece of wire to each of the bent-up pin 4's connecting them all and leaving enough slack so that you can replace the piggy-backed chips in their sockets.

Remove the 6883 SAM chip and place it in the conductive foam. Pin 40 is the first pin to the right of the notch. Counting backwards on the right side, locate pin 35 (the sixth pin from the top). Solder one end of a 33-ohm, 1/4-watt resistor to the top of the SAM chip's pin 35 so that you can replace it in its socket.

Bend the resistor lead so that the resistor rests on top of the SAM

and the lead points toward the RAM chips. Return the SAM to its socket and solder a wire connecting the unused lead of the resistor to the most convenient pin 4 of the RAMs (Fig. 2). Do not move the jumpers. Close up the machine and you are done.

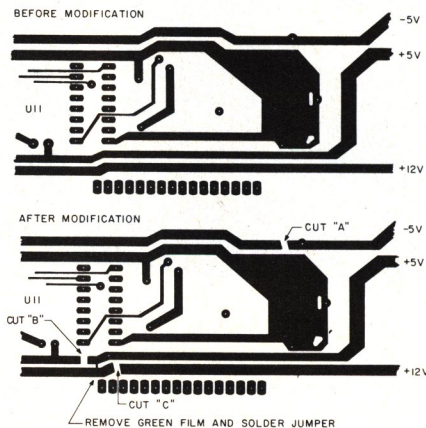


Fig. 3. Foil Side of PC Board

## 4 or 16K to 64K, D Boards—Difficult

You must first convert the D board to an E board. Check to see if you have a 1.1 or 1.2 Color Basic ROM by typing EXEC 41175. If you have the 1.0 version, order the updated ROM, Radio Shack no.

# The Other Korean CoCo—A Different Story

Until recently, upgrading all models of the Color Computer involved, among other things, replacing the eight memory chips with eight 64K by 1-bit dynamic RAM chips, usually designated by the number 4164.

Around January of this year, Tandy quietly introduced a new version of the Color Computer 2 with a new catalog number, 26-3134A for the 16K Color Basic model and 26-3136A for the 16K Extended Basic model. The A-version boards have been extensively redesigned. What follows is the 64K upgrade procedure for these boards and a technical rundown.

## The Newest 64K Upgrade

Tandy now uses 4-bit wide 16K dynamic RAM chips in its CoCo 2's. This means that there are only two RAM chips in the CoCo rather than eight. The chips in the current 16K A models are Texas Instruments 4416 chips. They are socketed and located more or less in the center of the board. On either side of this pair of 18-pin chips is a white female connector. This connector will allow for a plug-in satellite board for 64K upgrades.

But this satellite board would be quite clumsy, getting in the way of other hardware add-ons (e.g., lowercase kits and video drivers). (Ed. note: Apparently Radio Shack is upgrading these latest CoCos by replacing the entire board.)

But I know of two IC manufacturers who are delivering those 64K RAM chips at this writing: Hitachi (part number 50464) and NEC (part number 41254). Do not confuse the NEC number with the 41256 1-bit wide by 256K dynamic RAM chip. These chips currently sell for \$25 to \$35 each. Very soon at least two other chip manufacturers will offer similar chips. Texas Instru-

ments will introduce its 4464 chip and Micron Technologies will introduce its 4064 chip. Intel might offer its own version, too, so I expect prices to drop on the 4-bit by 64K RAM chips.

All of the above chips should work for the CoCo 2A 64K upgrade, which is simplicity itself. First, remove the two socketed 16K RAMs (labeled TMS4416) and replace them with your two 4-bit by 64K RAMs, aligning the notches on both chips and sockets. Then solder a jumper between the two solder points on the front (i.e., closer to the keyboard) right part of your CoCo board; they are clearly marked "64K RAM" and enclosed in a little rectangular white outline. That's all there is to it!

I used the NEC chips for this upgrade and have experienced no problems.

## Technical Details

The CoCo 2A uses a new SAM chip, 74LS285. It is the only chip other than memory socketed on the main board and is very similar to the old SAM, but it possesses 256-cycle refresh circuitry rather than the 128-cycle circuitry of the old SAM. This is to accommodate the new 4-bit by 64K RAMs. The new SAM will work with older CoCos, but the old SAM will not work with the 2A CoCos.

The new SAM also has extra circuitry so that it can support a full 64K RAM, 32K ROM CoCo without the extra NOR gate added externally to all older CoCos.

There is a new buffer chip between the memory and CPU. Older CoCo used a 74LS244 octal buffer; the 2A uses a TI 74LS623 octal transceiver chip. It serves a similar function.

The 2A's ROM hardware is much changed. It has one 28-pin socket for the on-board ROM operating system. On the Color



AXX3052. With the correct ROM version in the computer or in hand, open the CoCo.

Disconnect the power supply from the PC board. It has five plug-in leads. Remove the 10 Phillips-head screws that hold the PC board. Then pop the 16 metal fasteners that protrude through the board. Remove the board from its base. Now follow these steps in order:

- Remove the eight RAM chips, U20 through U27. These will be labeled 4027 if you have 4K or 4116 if you have 16K. If you have already performed the piggyback modification, remove the wire from the SAM's pin 35.

- Remove the 6883 SAM chip, U10, exercising great care since it is highly susceptible to static discharge.

- Turn the PC board over so that you are looking at the foil side. Referring to Fig. 3, cut the following lands: the -5-volt land at label A, the +5-volt land at label B, and the +12-volt land at label C. Make the cuts cleanly and about 1/16-inch wide. Use a high-quality cutting tool. We used an X-Acto knife with a #11 blade.

- Remove a portion of the green film at point D to expose the lands for soldering. Solder a small wire jumper at point D. We used approximately 1/4 of an inch from the lead of a 1/4-watt resistor. Any solid conductor wire of about the same diameter would suffice. This connects the +5 volts to the old +12-volt line, which will provide the 64K RAM chips with +5 volts to their pin 8's.

- Turn the PC board back over to the component side. Locate capacitors C48, C70, C45, C67, C35, C64, C61, and C31. Using a soldering iron, carefully remove these capacitors.

- On the PC board's component side, locate the area above capacitor C75, to the right of the SAM's pin 26, and below the screw hole. After you have found this area, hold the PC board up to a light and mark a dot in the center, being careful not to mark over a land. Then drill a

### by Martin H. Goodman

Basic model, they have plugged into this a 24-pin, 8K by 8 ROM with Color Basic 1.3. When this model is upgraded to Extended Basic, Tandy unplugs the 24-pin ROM and replaces it with a 28-pin, 16K by 8 ROM that contains both Color Basic 1.3 and Extended Basic 1.1.

Tandy also has to switch four or five jumpers located near the ROM socket. These jumpers are labeled 64K/128K. The switching of jumpers might require desoldering. The labeling of the jumpers suggest that the 2A can handle 128K of RAM. This is not true. Those designations refer to the number of bits in the ROM chip. They are used to select the different wiring for the 16K by 8 (128K bit) ROM chip. On the Extended Basic 2A, the single 16-pin ROM is soldered directly to the board.

Although the new SAM saves Tandy the use of one NOR gate on the 74LS02 chip, an extra gate is needed to blend together the two chip-select lines from the 74LS138, which formerly selected the two separate ROM chips, into a single select line for the new single ROM chip. Also, the new memory-chip arrangement requires the use of another NOR gate on that 74LS02 in order to properly work the gate timing on the 74LS623.

What about this Basic 1.3? Fortunately, the only changes that Tandy made from the 1.2 ROM were in the SAM setup routine and in the copyright notice logo. The changes for the SAM tell it how to recognize the new RAM chips. Other than that, the two ROM versions are identical.

If you have any questions, feel free to contact me on CompuServe's Color SIG. Type GO PCS 126 at the ! prompt, and then leave a note addressed to my PPN number, 70007,2246. ■

hole at this mark just large enough to pass an insulated wire.

- Prepare a 33-ohm, 1/4-watt, 10-percent resistor as follows:

- Cut one lead to 3/8 of an inch and solder it to about 6 inches of insulated wire as used above and cover the solder with spaghetti insulation or electrical tape.

- Bend the other lead at a 90-degree angle and install it into the hole previously occupied by capacitor C48. This is the hole closest to the board's bottom edge.

- Solder the resistor in place.

- Route the insulated wire through the previously drilled hole to the PC board's foil side. This wire should be routed to the land that connects to the SAM socket's pin 35.

- Cut the insulated wire to length and remove approximately 1/8 of an inch of insulation from the end.

- Very carefully solder the stripped wire end to pin 35 on the SAM socket. This now connects the 4164's pin 9's to address line A7.

- Check all connections, cuts, and so on to ensure that no solder bridges or metal fragments remain to short the lands.

- Remove the 4K/16K jumper that lies between the two PIAs, U4 and U8 on top of the board.

- Wire-wrap a length of 30-gauge wire to the center post and connect the other end of the wire to PIA U8's pin 17.

- If you have the 1.0 ROM, replace it with a 1.1 or 1.2 version.

- If it is not already set, place the other 4K/16K jumper to the 16K position.

- Install the new 64K RAM chips and replace the SAM chip. Be sure to line up the notches in the sockets with the notches on the chips.

- Proceed to this article's ROM-Write Disabling section.

### 64K Upgrade, E Boards—Moderate

If you already have a board that Radio Shack calls 32K, make certain that the jumper to the left of U8 connects the center pin with one marked "LOW", and then continue to the ROM-Write Disabling section.

If your E board has 4 or 16K, replace the RAMs with 4164s and set all four jumpers to the 32K position. One jumper is to the right of U10 (the SAM chip) and the other three are just above the keyboard connector. Remove capacitors C48, C70, C45, C67, C35, C64, C61, and C31.

If it is not already installed, add a jumper connecting the LOW and the unmarked center pin to the left of U8 (a PIA). The other pin, marked "HIGH", is not used. Locate the two pins without anything connecting them labeled R83 to the right of U10. Solder in place a 33-ohm, 1/4-watt, 10-percent resistor connecting the two pins. You now have what Radio Shack calls a 32K machine. Proceed to the ROM-Write Disabling section below.

### ROM-Write Disabling

This procedure applies to E or modified D boards only.

You must disable the ROMs during a write cycle. RAM will occupy the entire address space from \$C000 to \$FDFF. The interrupt vectors will not be affected since they reside in the protected area from \$FF00 to \$FFFF. Follow these steps:

- On the component side of the board, locate and remove the two ICs (integrated circuits) labeled U11 and U29. They should be a 74LS138 and a 74LS02.

- Prepare the chips as follows:

- Carefully bend pins 4, 5, and 6 of the 74LS02 straight up (Fig. 2).

- Carefully bend pin 5 of the 74LS138 straight up.

- Solder a short piece of wire to pin 8 on the 74LS02 at the point where the pin enters the chip, as you must plug this pin back into the socket.

- Solder the other end of the wire to pin 6 of the same chip.


- Replace the chips in their sockets.

- Solder a piece of wire from pin 5 of the 74LS138 to pin 4 of the 74LS02.

- Locate TP1 and cut a length of wire that will reach from pin 5 of the 74LS02 to TP1.



# It's time we put our chips on the table

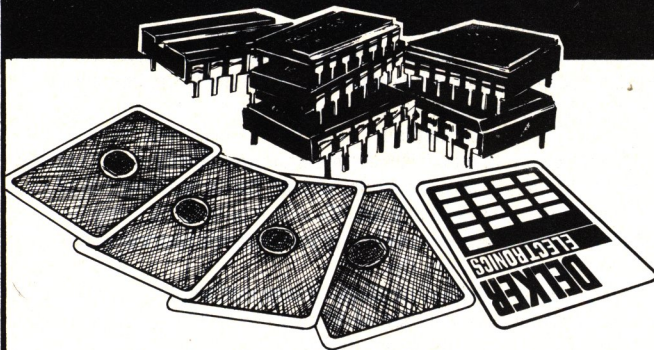

**and showed you our best  
deals on computer hardware.**

## HARDWARE SPECIALS

Extended Basic w/bk	\$ 39.95	26-1276 DMP-105 Printer 80 cps	\$179.95
64K (DEI) Memory Upg	\$ 49.95	C. Itoh 8510 BPI Printer 120 cps	\$399.95
26-3029 CoCo Drive 0	\$275.95	C. Itoh 7500 Printer	\$249.95
26-3023 CoCo Drive 1	\$229.95	Gorilla/NAP Video Monitor (Grn)	\$109.95
HJL Keyboard (D.E.F.2)	\$ 79.95	Video Monitor Adapters	\$ 29.95
Super Pro Keybd: (D.E)	\$ 64.95	26-3024 RS Multi-Pac Interface	\$ 89.95
26-3127 64K Extended CoCo2	\$179.95	Botek Ser/Par Interface	\$ 69.95
26-3134 16K Standard CoCo2	\$ 89.95	CGP-220 Ink Jet Printer	\$379.95
26-3136 16K Extended CoCo2	\$129.95	DMP 110 Printer	\$349.95
26-3802 Model 100 24K	\$449.95	26-1278 DWP 220 Printer	\$539.95
26-3816P 8K Upgrade Model 100	\$ 55.95	26-3860 Model 200	\$899.95
26-1192 CGP-115 Printer/Plotter	\$119.95		

## ACCESSORIES

Volksmodem 1200	\$299.95	26-3030 OS-9 (64k)	\$ 64.95 (disk)
RS D.C. Modem IB	\$ 89.95	Basic-09 (req. OS-9)	\$ 87.95 (disk)
Novation J-Cat Modem	\$129.95	"C" Compiler (OS-9)	\$ 87.95 (disk)
USR Password 300	\$179.95	FHL O-Pak (req. OS-9)	\$ 34.95 (disk)
Hayes SM 300 Modem	\$239.95	Elite Word	\$ 59.95 (d&c)
USR Password 1200	\$399.95	Elite Calc	\$ 59.95 (d&c)
USR Password 2400	\$599.95	Color Term Plus	\$ 29.95 (cass)
CoCo Switcher	\$ 39.95	Def Pascal	\$ 79.95
Elephant Disks ssdd	\$ 18.95	26-3012 Deluxe Joystick	\$ 34.95
Mach II Joystick	\$ 39.95		

**NEW! Dual Double Sides Drives including  
case, power supply & cable \$375.95**

**NEW! 26-3128 64K  
Direct Video CoCo2 \$219.95**


## MSI SOFTWARE

MSI DISKUTIL	NEW	\$ 19.95	MSI CALENDAR	NEW	\$ 19.95
COLOR FINANCE II	NEW	\$ 69.95	MSI COLOR PAYROLL	NEW	\$ 99.95
MSI NAMEFILE		\$ 24.95	COLOR FINANCE 4		\$ 69.95

Call for prices and availability of your favorite software and hardware. All advertised items subject to availability. Prices do not include shipping and handling. All of the above units are covered by our 120 day carry-in warranty.

TRS-80 Trademark Tandy Corporation. Prices subject to change without notice. Write for our FREE newsletter.

Circle Reader Service card #397.



**DELKER ELECTRONICS, INC.**

P.O. Box 897  
408C Nissan Blvd. Smyrna, TN 37167

Call Toll Free:  
**800-251-5008**

**800-545-2502 (TENNESSEE)**

**615-459-2636 (TENNESSEE)**

**615-254-0088 (NASHVILLE)**



● Solder one end of the wire to pin 5 and wire-wrap the other end to TP1.

● Recheck your wiring and look for any shorts, especially between the 74LS02 and the shield.

● Reassemble your machine.

## 16K to 64K, 285 (a.k.a. F) Board —Easy

If you have a 32K F board, you need only the 64K Enable software described later in this article. If your F board has 16K, remove capacitors C58, C60, C62, C64, C66, C68, C70, and C72 with a pair of diagonal cutters. Replace your 16K chips with 4164 dynamic RAMs and set the jumpers to the 64K position. You must add another jumper at a location clearly marked "64K".

## 16K to 64K, U.S.A.-made CoCo 2—Moderate

Open your machine, noting that there are six screws. Remove the 16K chips from the sockets labeled U14 to U21. Solder a wire connecting the two solder pads to the right of W1, which is located diagonally between U6 and U7. Install the new 4164 RAM chips in sockets U14 to U21, aligning the notches. Reassemble the machine.

## 16K to 64K, Type 1 Korean CoCo 2 —Moderate/Difficult

The level of difficulty for this modification depends on whether the chips are socketed or soldered. If the 16K chips are not socketed, you must remove the PC board from the machine and desolder the chips, replacing them with IC sockets with their notches pointing in the same direction as those on the chips. Note: Desoldering is difficult, and not for amateurs.

The eight 2118 dynamic RAMs are located in two places: a group of three and a group of five. Solder a wire connecting the two solder pads inside the box marked "64K". Install the new 4164 RAM chips in the sockets, aligning the notches. Reassemble your computer.

## Testing Your Handywork

Memory Test, Program Listing 1, tells you if you did the upgrade correctly, and it will work with any Color Computer. The E Board test checks to see if your RAMs are active; it writes to the area of RAM that is not in the same address range as your ROMs. If you have a 32K machine and this test checks out, you really have 64K RAMs. The Write to ROM Area test is for those with D or E boards. If it fails, recheck the ROM-Write Disabling section.

## Extended Basic Installation

This procedure is the same for all CoCos. Order the Extended Basic kit, Radio Shack catalog no. AXX7072. Open your CoCo or CoCo 2. Install the new ROM in the empty socket that is provided, aligning the notches.

Reassemble your CoCo and type PRINT MEM. You will have 6,144 fewer bytes because Extended Basic reserves that amount of memory for graphics. If you do not plan to use graphics and want to free memory for a large Basic program, type POKE 25,6:NEW for a tape system or POKE 25,14:POKE &HE00,0:NEW for a disk system.

If you have the latest CoCo version (catalog no. 26-3134A), you need a different 16K ROM to replace the 8K Color Basic 1.3. (See sidebar.)

## Enabling 64K

Program Listing 2, 64K Enable, puts your computer into 64K (all RAM) mode and keeps it there even when you reset it. Your CoCo's OK prompt appears in reverse video to let you know you are in all-RAM mode. To return to the RAM/ROM mode, cycle power off and on again. ■

See program listings on page 45

Richard Esposito and Raymond Rowe are authors of HOT CoCo's Doctor ASCII column. Write them c/o HOT CoCo, 80 Pine St., Peterborough, NH 03458.



## UTILITY

by Henry C. Grace, Jr.

# The 80K Color Computer

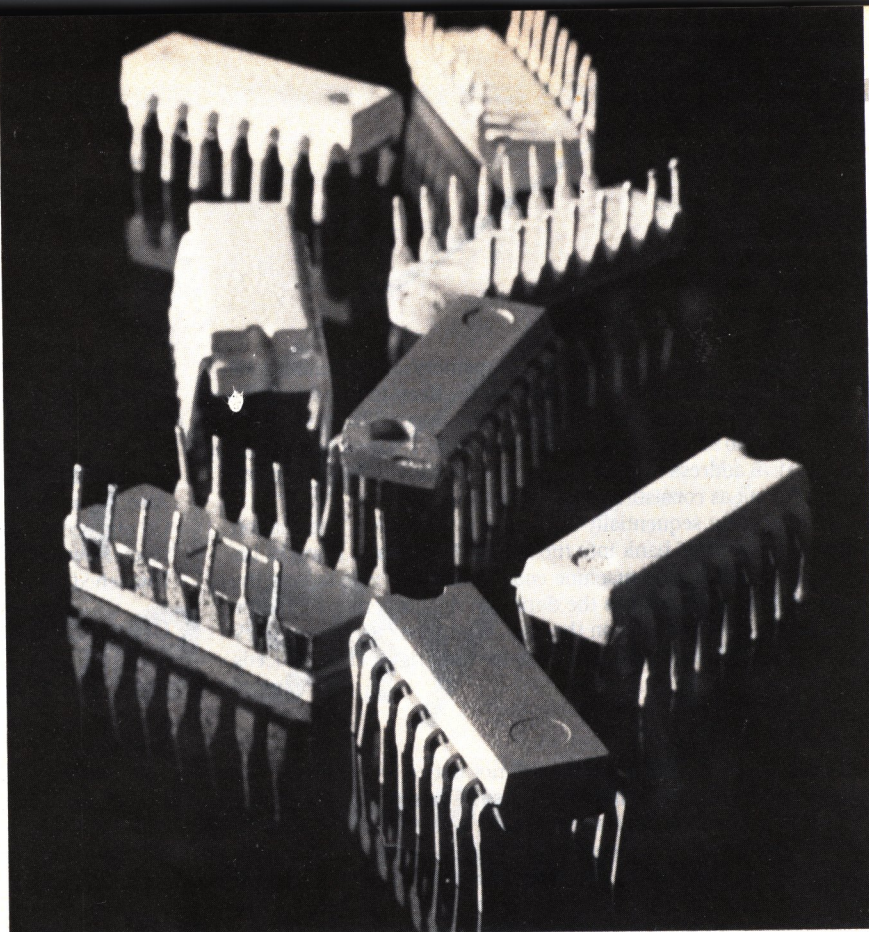


Photo by Edward Judice

*Find that hidden memory and make the most of your CoCo.*

**T**hose of you with 32K or 64K CoCos are probably painfully aware of what it costs to use all 64K. You need a disk drive and an alternate operating system to reside in the upper 32K of RAM.

You have probably also seen articles and notes on how to dump your ROM into RAM and activate it. This provides almost 16K of additional RAM for machine-language programming, and, for those who have modified boards, it allows RAM patches. My unmodified 32K machine does not allow such repairs.

These are unsatisfying restrictions on the use of all that memory capacity sitting under your fingertips, and there should be a better way to use it.

Program Listing 1 demonstrates that this extra RAM is accessible and can be used as a separate Basic operating environment. (Program Listing 2 gives the Assembly version of the DATA statements.) You can have two Basic programs loaded into the computer at the same time, one in each 32K bank of RAM. You can execute either program independently of the other, or cause them to interact with each other back and forth between the banks of RAM.

In fact, you can use this technique to manipulate your cassette files. Have you ever used multiple tape saves and loads to reorganize programs on a tape? Now you can simplify the process by loading two programs into the computer at the same time. Or have you ever needed information contained in a program on tape, but you don't want to dump the program presently in memory? Now you can put both programs into memory, select the one you want, and list it. With RAM and ROM, your computer becomes an 80K or more machine.

### Background

Type POKE&HFFD5,0 into your 64K computer and it goes into limbo, responding only to the reset button, because memory location \$FFD5 selects the alternate bank of RAM. But, when you

select it, it is blank, and the Basic interpreter does not have its required pointers in low memory, so the computer rips off, absently doing its own thing. How can the Basic system be made to run in the alternate RAM bank? Give it the pointers it needs.

Before you do this, you must look at memory location \$FFDF, which selects memory map 1. When this address is POKEd it deactivates ROM and activates the alternate RAM bank in place of ROM in the memory map. That is, the RAM becomes the upper 32K of the total of 64K in the computer.

Memory address \$FFDE reverses this process, returning the machine to memory map 0. The first machine-language subroutine in Listing 1 (called by USR0 to address 32300) makes use of these two addresses to sequentially load the entire ROM operating system into the alternate RAM bank. When the subroutine returns to Basic, memory map 1 is in effect and the RAM-based operating system is running things. (You might also have seen this technique before in "64K Modification," by Richard Esposito and Raymond Rowe, *HOT CoCo*, July 1983, p. 44.)

You cannot POKE new instructions into the Basic area of an unmodified CoCo (like mine). You are concerned with memory locations from \$C000 to \$FEFF (\$E000 to \$FEFF in Disk Basic). You can POKE these addresses to gain almost 16K (almost 8K with Disk Basic) of extra RAM for machine-language programs.

One of the tricks to initializing RAM bank 2 for Basic lies with the second machine-language subroutine (address 32326) in List-

### System Requirements

64 or 32K RAM

Extended Color Basic

Editor/Assembler optional



ing 1. The trick is in its placement in memory; the machine code is stored in duplicate in both RAM banks. Keep in mind that, although RAM bank 2 is now serving as the upper 32K, it will soon be returned to an equal status with RAM bank 1. The code is stored in identical address locations in each RAM bank, when you think of each bank as consisting of addresses 0-32767.

This program sequentially duplicates every byte of information from the first RAM bank into the second RAM bank. It works because of the duplicate machine code. When the code selects the second RAM bank, it finds the duplicate right where it should be to keep the CPU working on the task. When the code jumps back to the first RAM bank, it again finds the code right where it needs to be.

## Getting Video

When you run Listing 1, you will not notice any change. The video screen will look as it normally looks, though a little massaging of the video RAM page-select register was required to get it. In RAM bank 1 the start of video RAM, VIDRAM, is \$400. This is page 2 (bit pattern 0000010) in the video-page-select register (locations \$FFC6 through \$FFD3). (See the back of the *Getting Started with Color Basic* manual for further information on this register.)

In RAM bank 2, Basic treats VIDRAM no differently; memory \$0 to \$7FFF are the RAM addresses in both banks, and \$400 is VIDRAM. However, the physical realities are different. In RAM bank 2, the video RAM is located in page 66 (bit pattern 1000010) in the video page-select register. If you leave VIDRAM at page 2, or \$400, you will not have a video display in RAM bank 2.

By properly setting the video page-select register, VIDRAM is changed to \$8400, or page 66, and RAM bank 2 has video. Of course, when you want to change back to RAM bank 1, VIDRAM must be reset to \$400, or page 2.

Machine-language subroutine 2 properly sets VIDRAM to \$8400 before leaving RAM bank 2 active. It also stores a \$39 (RTS) at memory location \$0167, disabling a ROM subroutine that resets VIDRAM to page 2 before every PRINT operation. This is why you see a proper video display after you run Listing 1.

Machine-language subroutines 3 and 4 in Listing 1 allow transfer from one RAM bank to the other. Subroutine 3 (address 32353) transfers from bank 1 into bank 2. Just type EXEC 32353 and you will be in bank 2 with proper video. (All this assumes that you have run Listing 1 to store the machine code.) Subroutine 4, called by EXEC 32383, transfers from bank 2 into bank 1, with the video properly set. You cannot use bank 2 for high-resolution graphics.

## Using the Method

To set up for Basic in the second RAM bank, enter and run Listing 1. You will be in RAM bank 2 when the OK prompt returns. The Basic program operates in two passes. On the first run through, it stores the machine-language code starting at address 32300. It attempts to store at address 65068, but those addresses are not in RAM yet.

Next, the program uses the USR function to execute the first machine-language subroutine, which copies ROM into RAM and sets memory map 1. The program then loops back and stores the machine-language subroutines again. This time the addresses starting with 65068 are in RAM and the code is stored. After this, the program switches back to memory map 0.

You now have two equally ranked banks of RAM again, but now they have the machine code stored at identical locations. Finally the program calls subroutine 2, which copies RAM bank 1 identically into RAM bank 2 and exits back to Basic in RAM bank 2.

To reenter RAM bank 1, type EXEC 32383 and press enter. EXEC 32353 puts you into RAM bank 2. You can CLOAD, list, and run programs in each RAM bank independently. Just remember that high-resolution graphics will not respond properly in bank 2. In bank 2, avoid all commands like PCLS, PCLEAR, and so on. Also, if you press reset in RAM bank 2, you will return to bank 1. On one occasion I lost the program in RAM bank 2 after pressing reset. However, every other time the program was still there when I switched back to bank 2 again.

## Cross Communications

The two RAM banks are independent, but it is possible for them to communicate with a Basic program. Machine-language subroutines 5 and 6 in Listing 1 allow this cross transfer using Basic programs.

Subroutine 5, called by EXEC 32413, transfers from RAM bank 1 into bank 2. Subroutine 6, called by EXEC 32443, transfers from RAM bank 2 into bank 1. Both calls should be made as part of a Basic program, or segment of a program, and stored identically in both RAM banks. Program Listing 3 is a demonstration program for Basic transfers between the two banks.

To use Listing 3, follow this sequence:

- CLOAD Listing 1 and run it;
- enter EXEC 32383 to reenter bank 1;
- CLOAD Listing 2 but do not run it yet;
- enter EXEC 32326 (subroutine 2) to duplicate Listing 2 in bank 2;
- enter EXEC 32383; and
- run.

The program will print messages and input prompts, under Basic control, from both RAM banks. Note from the above sequence that machine-language subroutine 2 duplicates all of RAM bank 1 into RAM bank 2 anytime you execute it. Subroutines 5 and 6, on the other hand, duplicate only the Basic pointers and video RAM in lower memory. This means that programs communicating back and forth can have altogether different variables-table data.

It should be possible, using either Basic or machine-language programs, to devise algorithms that would allow more complete use of all 64K. The trick is to have identically addressed duplicate code in both memory banks. It might even be possible to have two totally different Basic programs running at the same time.

Perhaps you could operate RAM bank 2 as a printer buffer, while another program runs in bank 1. Or perhaps you could write machine-language code to let you use bank 2 as a minidisk emulator to store data for a program running in bank 1. This would give more room in bank 1 for the program.

A simpler way to do all these things is to store required machine-language code in a cartridge ROM. This would allow all the operations I have described to be performed without the need for duplication in the RAM banks. The cartridge ROM would be independent of the RAM areas, and it could preside over both areas in the same way the Basic ROM does.

I would be glad to hear from anyone having ideas or questions about this method, or potential uses for it. (If you want a reply, please send a self-addressed, stamped envelope with your query.)■

See program listing on page 45

Address correspondence to Henry C. Grace, Jr. 424 Ranchwood Drive, Baton Rouge, LA 70815.



# ***Pie in the Sky***

***You supply the ingredients,  
your CoCo makes  
the pie graph.***

**T**here are many programs on the market that produce pie graphs. This one won't cost you a penny. You furnish the data; it calculates percentages and displays the graph on your screen. Use a screen-dump utility to get a printout.

Type in and load Listing 1. The program contains the high-speed POKE 65495,0, which may confuse certain CoCos. Delete the POKEs in lines 20 and 780 if a menu doesn't appear when you run the program. The opening screen lists seven options:

1. Start.
2. Save to tape.
3. Load from tape.
4. Edit.
5. Change graph name.
6. Change graph comment.
7. View graph.

## **System Requirements**

**16K RAM**  
**Extended Color Basic**  
**Printer optional**  
**Screen-Dump Program optional**



Illustration by Chris Demarest



Table 1. Sample Data.

### Software's Top Ten

1. IBM	\$110
2. Radio Shack	110
3. Apple Computer	68
4. Microsoft	68
5. Visicorp	52
6. MicroPro	50
7. Digital Research	44
8. Lotus Development	38
9. Ashton-Tate	33
10. Peachtree	.20

(Information from *Computers and Electronics*, July 1984, p. 14.)

To submit your data, press 1 (one) and the enter key; the screen prompts you for the number of sectors from 1 to 22. At the next prompt, type in the eight-character sector name and amount for each portion of the graph. You are prompted for the graph title and comments you want to appear below the graph. Press the enter key if you have nothing to submit. When you type 7, a complete listing of the sectors with their respective percentages appears on the screen and you see the graph drawn.

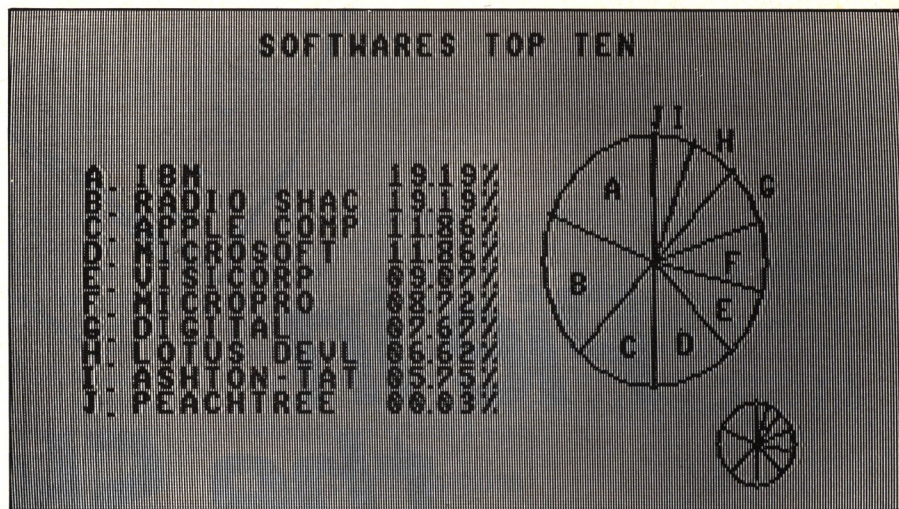


Fig. 1. Sample Pie Graph Video Screen

The edit mode displays a complete list of the data you have submitted. A black cursor is in the left margin opposite the first entry. Use the up and down arrows to move it to the appropriate line and the right arrow to change the entry. You must resubmit both the sector name and the amount. If you wish to delete a sector, position the cursor and press D. To add a sector, move the cursor to the last entry, press A and the number of sectors you're adding. The program assumes you have only one new entry if you wait

about a second after pressing A. To return to the menu, press the clear key.

I entered the data from Table 1 and printed it out to produce the diagram in Fig. 1. You can use the same data to practice using the program. ■

See program listing on page 50

Address correspondence to Terry Riegel, P.O. Box 389, Laramie, WY 82070.

## PERRY COMPUTERS

Circle Reader Service card #124

### COLOR COMPUTERS

CALL TOLL FREE 1-800-248-3823

#### COLOR COMPUTER, DISK DRIVE AND PRINTERS

#### COLOR COMPUTER SOFTWARE

	LIST PRICE	OUR PRICE
26-3136 16K Extended Color Computer 2	\$ 139.95	\$ 120.00
26-3127 64K Extended Color Computer 2	\$ 199.95	\$ 169.00
26-3029 Disk Drive 0 for Color Computer	\$ 349.95	\$ 295.00
26-1161 Disk Drive 1, 2, 3 for Color Computer	\$ 279.95	\$ 230.00
26-1276 DMP-105 80cps Dot Matrix	\$ 199.95	\$ 169.00
26-1271 DMP-110 50/25 cps Triple Mode Printer	\$ 399.95	\$ 299.00
26-1255 DMP-120 120 cps Dual Mode Matrix	\$ 499.95	\$ 385.00
26-1257 DWP-210 14 cps Daisy Wheel Printer	\$ 459.00	\$ 485.00

	OUR PRICE
Telewriter 64 Tape	\$ 49.95
Telewriter 64 Disk	\$ 59.95
VIP Writer	\$ 59.95
VIP Speller	\$ 49.95
VIP Database	\$ 59.95
VIP Terminal Disk	\$ 49.95
TOM MIX Software	\$ CALL
RADIO SHACK Software	15% Off

#### OTHER PRINTERS AND ACCESSORIES

#### MONITORS

	OUR PRICE
EPSON Printer	\$ CALL
OKIDATA Printer	\$ CALL
STAR GEMINI 10X Printer	\$ 275.00
COMREX CR-II Daisy Wheel Printer	\$ 415.00
C.I.TOH 8510 Prowriter Printer	\$ 335.00
BOTEK Serial to Parallel Interface	\$ 59.00

	OUR PRICE
COMREX 12" Green Monitor	\$ 95.00
COMREX 12" Amber Monitor	\$ 110.00
COMREX 13" Color Monitor	\$ 285.00
AMDEK 300A Monitor	\$ 155.00
VIDEO PLUS Monitor Adaptor	\$ CALL
GORILLA Monitor	\$ 85.00

#### COLOR ACCESSORIES

	LIST PRICE	OUR PRICE
26-2226 RS-232 Program Pak	\$ 79.95	\$ 68.00
26-3012 Deluxe Joystick (EACH)	\$ 39.00	\$ 34.00
26-3017 64K RAM Kit	\$ 69.95	\$ 59.00
26-3008 Joysticks	\$ 24.95	\$ 21.00
26-3016 Keyboard Kit	\$ 39.95	\$ 34.00

	LIST PRICE	OUR PRICE
26-3018 Extended Basic Kit	\$ 39.95	\$ 34.00
26-1175 Direct-Connect Modem I	\$ 99.95	\$ 85.00
26-1173 Direct-Connect Modem II	\$ 199.95	\$ 169.00
Signalman Modem 300/1200 Baud	\$ 399.00	\$ 275.00
Hayes Modems		\$ 215.00

All prices and offers may be changed or withdrawn without notice. Advertised prices are cash prices. For shipping, add 2% (minimum shipping charge \$3.00). C.O.D. accepted. (\$4.00 charge per carton on C.O.D. Call for further COD information.) M.C., Visa, AX, add 3%.

PERRY COMPUTERS • 137 NORTH MAIN STREET • PERRY, MI 48872



# DYNACALC®

## CoCo's Best & Fastest Spreadsheet System

### ACCLAIMED BY THE EXPERTS

*"DYNACALC is my choice for a CoCo spreadsheet."*

*Dan Downard, RAINBOW, September, 1984.*


*"Eat your heart out, Lotus 1-2-3!"*

*Scott Norman, HOT CoCo, October, 1984.*

#### Built-in Features:

- 51 x 24 Display with Lower Case
- Super-fast Smart Screen Refresh
- Auto-Repeat Keyboard Driver
- Keysaver (TM) repeats last command x times
- Disk Operating System (works just like ROM DOS)
- Easy communication with BASIC/DOS programs
- Two-way communications with PRO-COLOR-FILE ★ Enhanced ★
- Outputs to ASCII Word Processors like Telewriter-64
- Fast 16-Digit Arithmetic with Scientific Functions
- Summation, Mean, and Standard Deviation Functions
- Logical Functions with String & Numeric Comparison
- String locate command to navigate large worksheets
- Sort full or partial worksheet by columns or rows
- Line, Bar, Hi/Lo/Close, Circle Graphs
- Full Graphics captioning and overlay facility
- Graphics Drivers for all popular Printers
- Joystick/Mouse Driver for Cursor Movement
- Works with any ROM versions, even JDOS
- 33k Available Worksheet Space
- Up to 256 Columns or 256 Rows
- Can use VisiCalc worksheets & training materials
- On-screen Help Messages

**NOW  
ONLY  
\$99<sup>95</sup>**

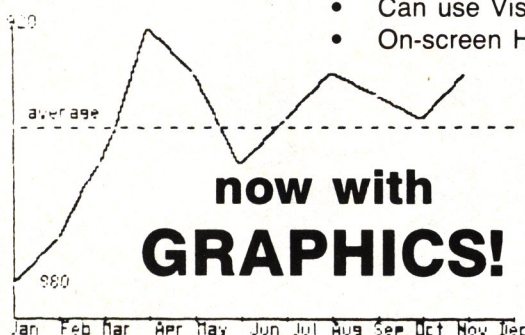

#### FOR 64K DISK SYSTEMS

available from

#### COMPUTER SYSTEMS CENTER

42 Four Seasons Center #122  
Chesterfield, MO 63017 USA  
(314) 576-5020

10 to 6 Mon.-Fri.

or your local DYNACALC dealer

Price US\$99.95

Outside North America add \$10 postage

DYNACALC Reg. U. S. Pat. Off.

Lotus and 1-2-3 are trademarks of Lotus Development Corp.

PRO-COLOR-FILE is a trademark of Derringer Software

Telewriter-64 is a trademark of Cognitex

VisiCalc is a trademark of VisiCorp.

CANADA-CDN \$129.95

DATAMAN INTERNATIONAL  
420 FERGUSON AVE. N.  
HAMILTON, ONT. L8L 4Y9

(416) 529-1319

AUSTRALIA

PARIS RADIO

161 BUNNERONG RD.

KINGSFORD 2032 NSW


(612) 344-9111







# ***Investment Analysis***

*Profit from your CoCo's  
investment advice.*

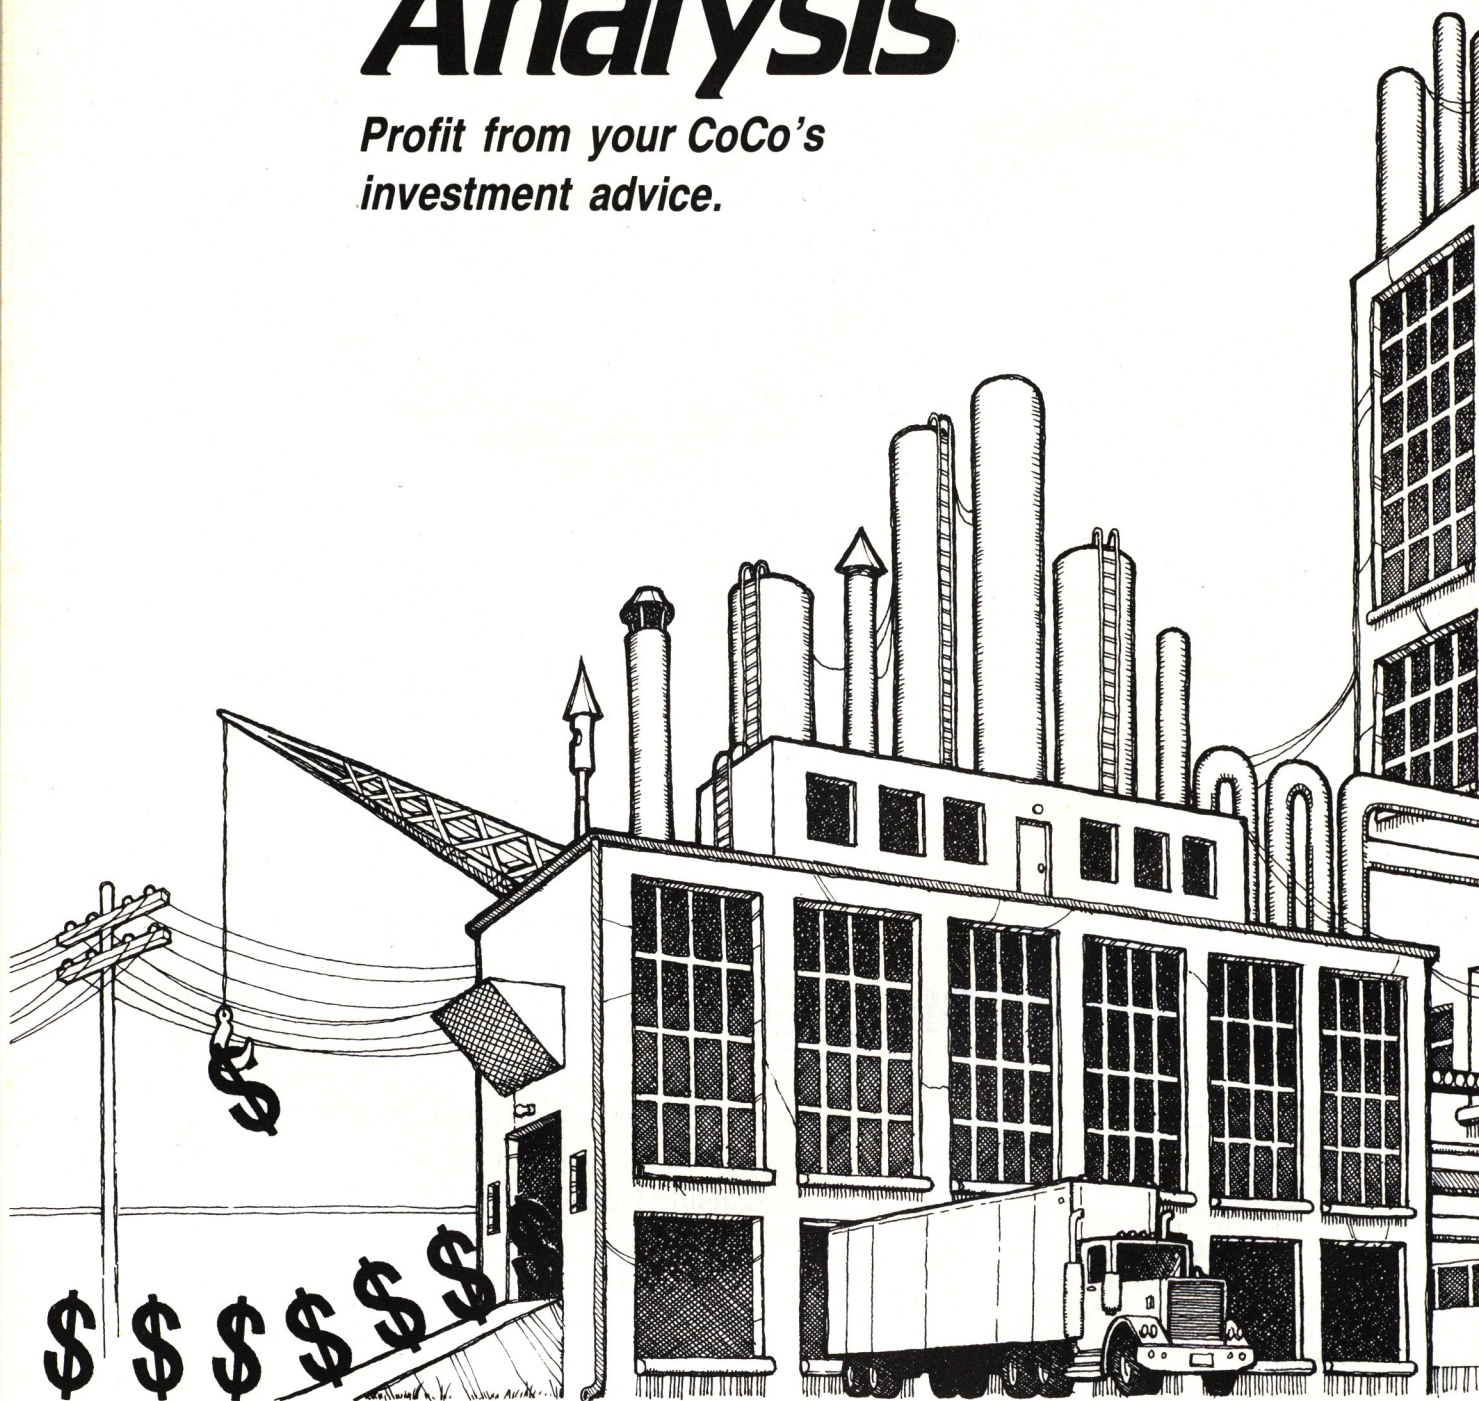



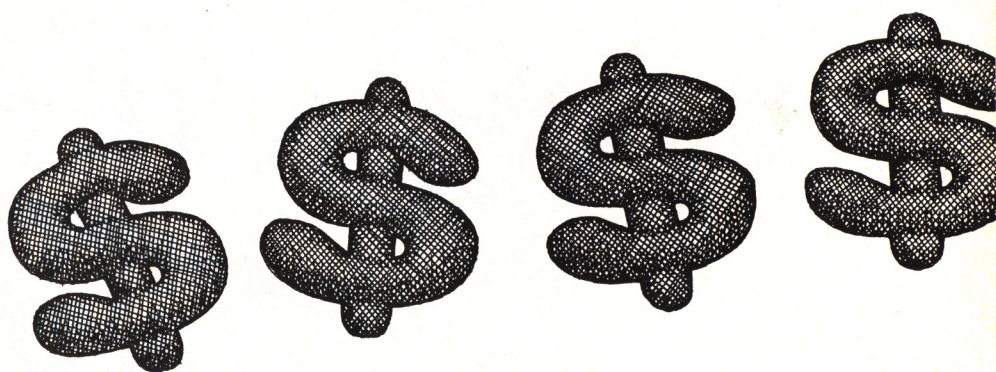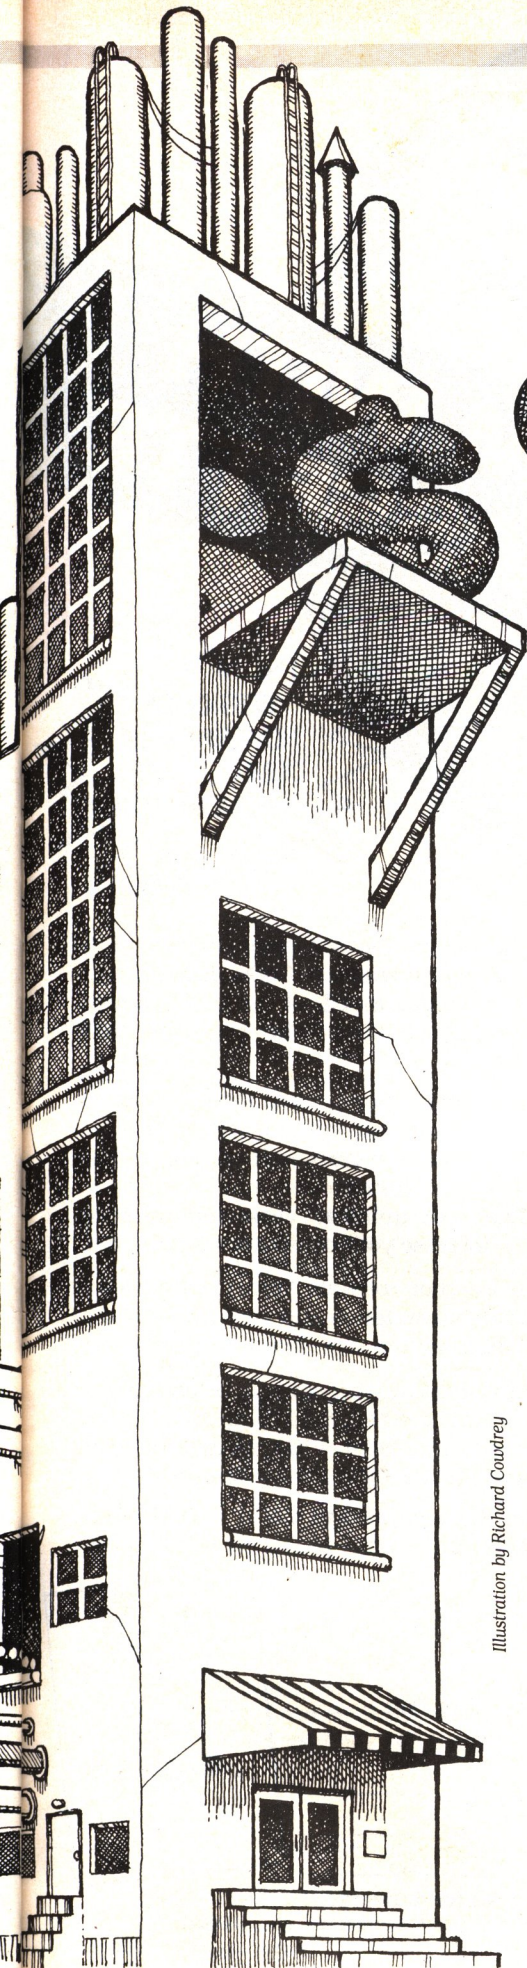

**W**hen evaluating an investment plan, you must consider a wide range of variables before determining the plan's profitability. With the program accompanying this article, your CoCo becomes a tool for making strategic investment decisions. It quickly assesses the impact of all those what-ifs on your return on investment.

Whether you are a manufacturer investing in plants and machinery, an individual buying stocks, or a corporation planning a marketing-research program, the problem you face is the same. All such investments require current expenditure, but the return on investment accrues over a number of years, perhaps over 10 or more.

The difficulty in gauging the profitability of such long-term projects is that inflation erodes wealth. To figure profitability, you cannot simply add up the benefits arising over the life of a project and then compare them to the investment made in the first year. It is therefore necessary to assign a time value to money.

Take, for example, the case of a warehouse project that costs \$1 million, yields a profit of \$150,000 per year, and has to be abandoned after 10 years due to expiration of the lease. If you add the yearly profits, the total profit is \$1.5 million. So, in 10 years the benefit is about 50 percent of the initial investment and the payback period is just over six years. The project appears very attractive viewed in this way.

However, if inflation is 15 percent over the same 10-year period, a dollar earned after 10 years would be worth less than 25 cents. When an adjustment is made for inflation, earnings of \$150,000 annually over 10 years

amount to only \$752,818, far short of the \$1.5 million return computed earlier. At this rate of return, investment in the project would be unwise, since payback falls short of the initial \$1 million spent.

### Net Present Value

The best way to assess the return on an investment, taking into account the time value of money, is by using the net present value (NPV) technique. The Program Listing prompts you through the process of computing this value.

First, supply the number of years over which you expect cash inflow from the investment. The program allows a maximum investment-analysis period of 15 years. If you require a longer period, alter the DIM statement in line 10 to  $A(n), PV(n), CV(n)$ , where  $n$  is the number of years.

The program then asks for the initial cash investment (in the warehouse example this was \$1 million) and goes on to request cash inflow for each year over the life of the investment. While this figure was \$1.5 million every year for the warehouse, it may vary from year to year, so you must enter the exact yearly values.

The next item requested is the discount or market rate. This is the projected inflation rate, the cost of capital to the firm, or the market rate of interest. The program now has sufficient data to compute NPV and offers you the option of seeing firsthand the eroding value of money by watching the NPV calculations run.

### Internal Rate of Return

NPV alone does not give a complete financial picture of a prospective investment. Banks and financial institutions, in particular, like to evaluate the internal rate of return (IRR), the minimum discount rate that yields a positive NPV. IRR is the profitability in percentage points after taking into account the eroding value of money. The higher the IRR, the more lucrative the project is.

The main advantage of using IRR is that the investor does not have to worry about computing the discount rate as he would with

**System Requirements**  
16K RAM  
Extended Color Basic

Illustration by Richard Coudrey



# OUR HOTTEST IDEA YET

## A FREE PROGRAM WITH EVERY CASSETTE

"BEST OF 84"  
NOW AVAILABLE  
COMPLETE WITH  
DOCUMENTATION

We want to give you something that *HOT CoCo* can't. That's right! **instant CoCo** will now include a previously unpublished BONUS PROGRAM on each monthly cassette ... **FREE**.

The NEW AND IMPROVED **instant CoCo**. More than just another magazine loader. Each free program is our way of making sure you get state-of-the-art software.

You'll find variety and excitement every month. Everything from great games to helpful utilities. Commercial quality programs that would cost up to \$50 if purchased separately in any leading software store.

Since the bonus programs have never appeared in **HOT CoCo** due to their length, all necessary documentation will be specially provided with each cassette.

Save yourself some money. Subscribe to **instant CoCo**. Each month you'll get **8-12** of the best ready-to-run programs from the pages of **HOT CoCo**:

- **The best** action-packed games... hours of challenge and entertainment.
- **The best** business, school, home, and hobby programs.
- **The best** utilities... ease routine tasks... increase your computer's capabilities.

Increase your software library. Order a full 12 month subscription and we'll give you one **FREE** program on each monthly cassette.

Simply mail in the coupon below, or call TOLL FREE 1-800-258-5473. In New Hampshire, call 1-924-9471. VISA, MASTERCARD, and AMERICAN EXPRESS welcome.

With the new **instant CoCo**, we'll deal you the **BEST** programs—plus a great deal more!

### YES! I want a FREE program with every cassette.

- ☐ Please sign me up for a one year subscription beginning with this month's issue at \$99.97.
- ☐ Please send me \_\_\_\_\_ copies of this month's issue at \$11.47 each.
- ☐ Please send me \_\_\_\_\_ copies of the "Best of 84" at \$16.47 each.

\* Price includes postage and handling. Foreign Air Mail please add an additional 45¢ per cassette or \$25 per subscription. US funds drawn on US banks ONLY.

- ☐ Check Enclosed    ☐ MC  
☐ VISA    ☐ AE

Card # \_\_\_\_\_ Exp. Date \_\_\_\_\_

Signature \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_


**Please allow 4-6 weeks for delivery.**

instant CoCo • 80 Pine Street • Peterborough, NH 03458

IC8506





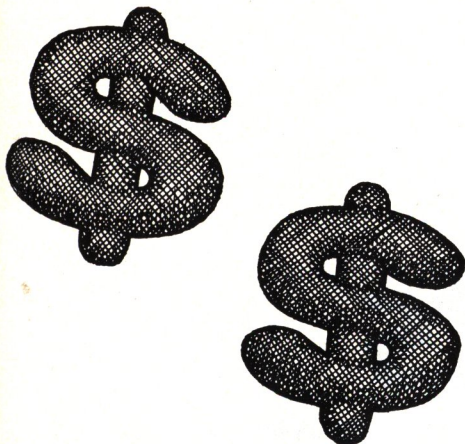

NPV. In addition, the IRR yardstick is easier to understand. The one drawback is the difficulty of calculating it; however, with this program that disadvantage is eliminated because the computer performs the computations using the figures you entered for NPV.

### Using NPV/IRR

The figures produced by the NPV/IRR program are only as reliable as the data you enter. To get an accurate picture of the advisability of an investment project, you must carefully review all the figures you use. Because the NPV/IRR model incorporates only actual money receipts and payments, noncash income and expenditure should not enter into computations. So, if the yearly profits accruing from a warehouse are estimated, this figure cannot be used for computing the returns in the NPV model. Likewise, depreciation (not a cash expense) has to be added back to the profits to arrive at the cash benefits.

All "sunk" costs should also be excluded from the analysis. If, for example, the investors in the warehouse had commissioned a research study costing \$30,000, it would be incorrect to consider this cost in the calculations. Even though the research is a cash investment, the \$30,000 has already been paid and so has no bearing on assessing the proposal, since money spent on research cannot be recovered if the investor abandons the project.

For more details on investment planning using the NPV/IRR model, refer to *Survey of Accounting*, by Gary L. Schugart, et. al. (Houston, TX: Dame Publications, 1982), and *Principles of Financial Management* by Van Horne (Englewood Cliffs, NJ: Prentice-Hall, 1974). ■

See program listing on page 51

Address correspondence to Dev Chakraborty, c/o Marshall G. Rothen, Motorola Inc., 725 South Madison Drive, Tempe, AZ 85281.

Tell them "I saw it in HOT CoCo."



## FOUR STAR SOFTWARE

\* CoCo has the *potential*, we have the *products*, you have the *power* \*

### COCO PAINT

(64K and at least one disk drive required)

- ☐ Supports Keyboard, Single Joystick, Mouse, Koala Pad, and Graphics Tablet.
- ☐ Allows the user to combine Hi-Res Graphics and various text fonts. Create you own text or modify supplied text styles to fit your needs.
- ☐ Create Stamps: rotate, mirror, shrink, expand or invert.
- ☐ Screen dump to most common printers.
- ☐ Option to save screens in standard binary format which allows integration into your own programs.
- ☐ Communications capabilities (300 or 1200 baud).
- ☐ Make use of numerous built-in textures to create special graphics effects. Utility included to design your own textures.
- ☐ Full documentation and handy reference card included. Very easy to use.

**DISK ONLY: \$39.95 (U.S.) OR \$49.95 (CDN)**

Cheque or Money Order  
Add \$2.50 shipping



Ont. Residents add 7% tax

P.O. BOX 730  
STREETSVILLE, ONTARIO  
CANADA  
L5M 2C2

Software submissions wanted  
Dealer enquiries welcome  
Overseas orders add 10%

"Send for a free copy of our Software Catalogue"

Circle 456 on Reader Service card.




### DAISY WHEEL New Smith Corona L-1000

True letter quality printer for less than the cost of an office typewriter! Priced \$500 less than other popular daisy wheel printers!

SALE PRICE:  
**\$269**

#### FEATURES:

- ★ Friction feed
- ★ 15 cps. 120 wpm
- ★ Changeable daisy wheels
- ★ Parallel or serial interface
- ★ Compatible with R/S. Apple. etc

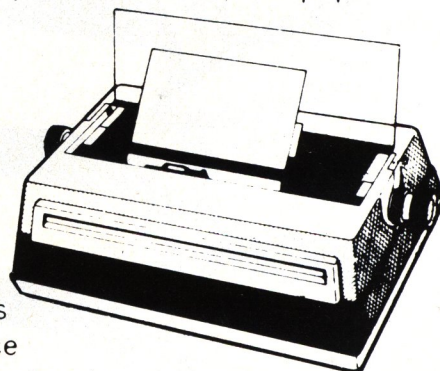

#### SUNLOCK SYSTEMS

210 Connor Rd.  
Mechanicsville, Va. 23111

We accept  
MasterCard,  
Visa and CODs

#### ADDITIONAL PRINTER SPECIALS

Epson	Okidata	Comrex II	\$389	Citoh 8510	\$329
RX80	ML82	Comrex III	629	Citoh F10	899
80FT+ 299	ML83	Gemini 10X	269	Citoh 1550	519
RX100 399	ML84	Gem.PrType	329	Okimate 20	149
FX80+ 429	ML92	Gem.Radx10	519	Sv.Reed 550	449
FX100+599	ML93	Gemini 15x	379	LQ 1500	1039
JX 80 579	ML182	Sv.Reed 500	379	Zen Monitor	99

**TO ORDER CALL TOLL FREE 800-368-9191**

In Virginia call 804-746-1600



# ***Fabulous Fonts for the Gemini-10X***

Design your own typefaces  
and give your  
printouts a little

**CHARACTER**  

**T**he new printers for the Color Computer are very special because they allow creativity. With the Gemini-10X, for example, a downloadable character set lets you design 96 characters by programming the printer with a dot configuration for each character. I have written a Basic program to lay out the dot patterns, save them on disk or tape, and program the printer when you are ready to use them.

## **Encoding Dot Patterns**

To understand how the program works, it helps to know how dot patterns are encoded for the Gemini. The print head consists of a vertical array of nine pins, or wires, used to make impressions on the print surface. You must program each pin to be on or off. Since all nine pins work at the same time, the printer needs to know the entire 9-pin configuration before you activate them.

The programmable character mode uses only seven of these pins to strike an impression—the top seven or the bottom seven. The bottom seven form the lower part of characters with descenders, such as p or g. Other letters, ascenders, use the top seven pins.

The character grid is seven rows high by nine columns wide. Each dot of the on/off pattern is represented as a binary digit, and the entire configuration is encoded as a 7-bit



number. The value of each row of dots from top to bottom is: 1, 2, 4, 8, 16, 32, and 64. To define all of the dots for a particular character, the program assigns a hexadecimal column value, equal to the sum of dot values in that column. Figure 1 shows a sample dot pattern for the letter A. Note that some dots are left out in row 4. The Gemini does not allow adjacent columns of any row to have consecutive dots.

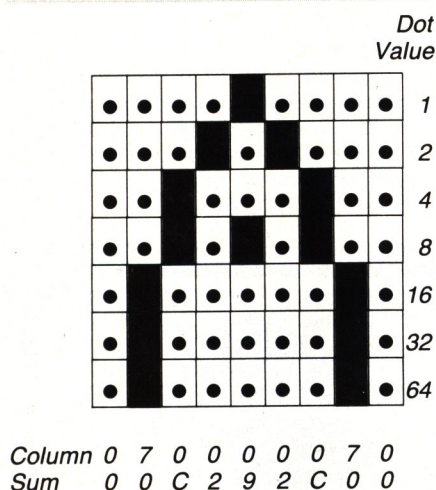


Fig. 1. Grid for the Letter A

## Program Structure

Table 1 outlines the program structure. One feature of the program, the storage of character codes as 7-bit numbers and their retrieval as strings, deserves further discussion.

Line 20 reserves and protects a block of 960 bytes of memory using a CLEAR statement. This space is for the ascender/descender code and the nine binary dot codes for the 96-character set. Line 310 POKes them into memory and line 280 retrieves them from the Gemini's RAM. You must transmit the codes as what I call numeric strings, e.g., CHR\$(8), rather than in the ASCII form, 8. The most efficient way to do this is to redirect the Basic pointer for the string variable containing the code, A\$, to the area of memory where the codes have been POKed as 7-bit numbers. The VARPTR function returns the pointer to the string A\$. POKing location L, which contains the data belonging to A\$, into the string pointer effectively fills A\$ with the necessary data.

## Running the Program

Type in the program exactly as listed. The spaces between elements are important for lining up the video display. As written, the program runs on disk. For tape, change lines 480 and 490 to CLOADM and CSAVEM, respectively. Run the program and the computer prompts you to turn on the printer. It then asks you for the baud rate. I run mine at 9,600 baud using a Blue Streak interface; the printer seems to keep up with the computer at this speed.

You can use a joystick or the keyboard to design your character set. If you select K, use the arrow keys to move the cursor. The menu offers you a variety of options:

- <S> et turns on the dot position shown by the cursor. It lets you design your characters at the screen.
- <R> eset turns off a dot that is on.
- <U> pdate stores the codes necessary to reproduce a character. Use update after you set the last dot in a character or if you wish to replace a character.
- <C> ls clears the screen.

- <D> irect allows direct entry of the binary code to define a character.
- <Q> uit stops the program.
- <V> iew allows you to review previously updated characters. Here you can edit and save (by updating) the character. By viewing an E and deleting a few dots, you can make a new character and update it as F without losing the E.
- <P> rogram programs the Gemini with the current character set.
- <L> oad reads a character from disk/tape.
- <W> rite saves the current set to disk/tape.
- <T> est prints the current set. Type P before using this option.

Let's assume you have already entered and saved part of a character set and now wish to complete it. Select the load option from the menu. At the prompt, enter the name of the file containing the character set. An array filled with dots, indicating that all the pins are off, appears. The cursor marks the first dot position.

At this point you can view the characters already completed for possible editing or continue to define new characters. To define new characters, move the cursor to the dot position you want to set. Press S and a black square appears in that position and a hex digit is entered at the bottom of the column. If you make a mistake or wish to reset a dot, move the cursor to the correct place and press the R key. A dot (off) replaces the black square and the hex value is updated.

When you finish, press the U key. The program asks you if you have descenders. Type Y for yes, or N for no. Finally, to identify the character you have defined, enter the value of an ASCII character in hex (e.g., &H5F for the backspace arrow), or type the character after the prompt. Certain characters must be defined in hex, otherwise Basic misinterprets them. If, for example, you enter the back arrow as a character, Basic treats it as a backspace.

### Line # Description

10-90	Set up
100-130	Compute cursor position if using keyboard
140-210	Option vectors
220	Test print character set
230-270	Program printer RAM
280-300	Update character
310	Direct keyboard entry of binary codes
320-370	Read screen and build binary codes
380	Display code hex value
390-440	View character stored in CoCo memory
450-470	Input ascenders/descenders, character, compute storage location
480-490	Read/Write data file
500-510	Get file name
520-540	Draw display
550	Baud-rate POKE values
560	PCLEAR

Table 1. Program Description

## System Requirements

16K RAM  
Extended Color Basic  
Gemini-10X Printer



After the program accepts the character, the screen clears and you can define another character. Once you have entered the last character, it is wise to save the set using the write option. If the file already has a name, it will appear on the screen and pressing enter saves the set under the original file name. With a disk, the string need not include an extension, since the data is saved in binary and the DOS appends /BIN by default.

The direct-entry feature lets you bypass the set option. Instead, you enter the nine column sums from the keyboard. When prompted, respond with a decimal or hex value, preceding all hex values with &H. The program displays the character when the last column sum is entered and then prompts you for descenders and character entry.

## Getting Started

Now that you've keyed in the program and understand how it works, you're ready for the hard part: designing a character set. To get you off to a good start, I've prepared Table

2, which shows the hex column numbers for 26 uppercase, futuristic characters. I used the program to design these characters and then recorded them using a SAVEM command. Use the direct-entry option to enter them. But don't stop there. You've got a flexible printer that will let you put your creativity to the test, so have fun! ■


Character	Column
	C0 C1 C2 C3 C4 C5 C6 C7 C8
A	78 00 76 09 00 09 06 78 00
B	7F 00 7F 00 49 14 47 70 00
C	7F 00 7F 00 41 02 41 22 00
D	7F 00 7F 00 41 00 41 3E 00
E	7F 00 7F 00 49 00 49 00 00
F	7F 00 7F 00 09 00 09 00 00
G	7F 00 7F 00 41 08 41 38 00
H	7F 00 77 08 00 08 00 7F 00
I	00 00 7D 00 7F 00 00 00 00
J	30 40 00 40 00 7F 00 7F 00
K	7F 00 74 0A 01 08 11 60 00
L	7F 00 7E 00 40 00 40 20 00

M	07 78 01 00 7E 00 01 7E 00
N	7F 00 7D 02 0C 30 00 7F 00
O	3C 42 3D 40 01 40 01 7E 00
P	7F 00 7F 00 09 00 09 06 00
Q	3C 42 3D 40 09 50 21 5E 00
R	7F 00 7F 00 09 10 29 46 00
S	46 09 40 09 70 09 32 00 00
T	00 01 7C 01 7E 01 00 03 00
U	3F 40 00 40 00 7F 00 7F 00
V	1F 00 1E 20 40 20 10 0F 00
W	07 78 40 3F 40 00 40 3F 00
X	01 66 14 08 00 6B 14 63 00
Y	01 06 04 08 70 0F 00 0F 00
Z	41 20 51 28 55 0A 45 00 00

Table 2. Futuristic Character Set


See program listing on page 52

Fabulous Fonts is available on the Instant CoCo cassette (see p. 64 for details). However, the author will provide the program and any new fonts he's created for \$6 and a disk or cassette with a double-stamped, self-addressed mailer. Write to Peter Stoloff, 9203 Custer Terrace, Adelphi, MD 20783.

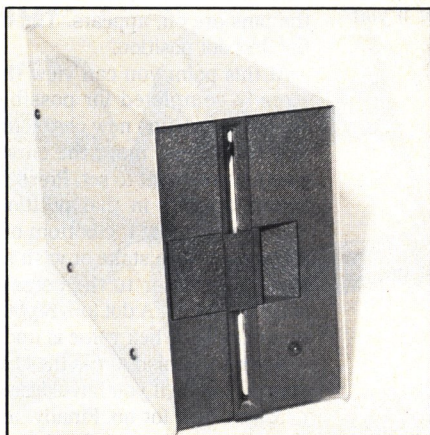

Drive 1 139<sup>95</sup>

Your Choice  
Silver or White

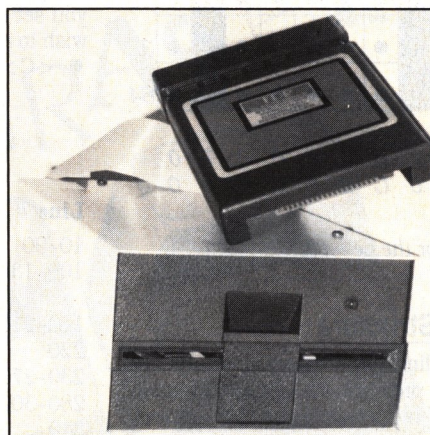

239<sup>95</sup> Drive 0

## SUPER DRIVE SALE

Special prices on new first quality disk drives. They even have GOLD connectors on the back...Some other places charge 279.00 for dr. 1 and 349.00 for dr. 0, not us! Drive 1 is for mod I, Second Color Computer drive, or external mod III, IV. Drive 0 is your first Color Computer drive and comes complete with controller, cable and manual. Bare drives for internal mod III, IV, only 89.95! For double-sided, add 45.00 (only for those who have DS-DOS, boards and knowledge)

Circle Reader Service card #11

### THE COMPUTER CENTER

901-761-4565, 5512 Poplar, Memphis, TN 38119

Add \$3.90 for shipping & handling—Visa, M/C accepted—Dealer inquiries welcome



# MOVING?

## SUBSCRIPTION PROBLEM?

Get help with your subscription by calling our new toll free number:

**1-800-645-9559 \***


between 9 a.m. and 5 p.m. EST,  
Monday-Friday.

If possible, please have your mailing label in front of you as well as your cancelled check or credit card statement if you are having problems with payment.

If moving, please give both your old address and new address.

\* New York State residents call 1-800-732-9119.

## DOUBLES DISKETTE CAPACITY! CUTS YOUR DISK COST 50%!

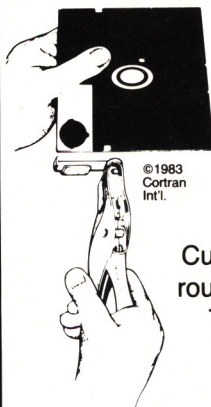

**Now!** The back of 5 1/4" Diskettes can be used for data storage even with single head disk drives.

- **NIBBLE NOTCH**® Tools make it easy.
- Adds the Precise notch where it's needed.
- Doubles Diskette Space or Money Back!

### NIBBLE NOTCH II

Cuts square notch and 1/4" inch round "index hole." For use with TRS 80 I and III, Osborne, Kaypro, IBM and others needing an "index hole."

only **\$21.90**

add \$2.00 each order P&H

(\$5.00 foreign P&H)

Florida residents add 5% Sales Tax

**SATISFACTION GUARANTEED OR YOUR MONEY BACK!**

**ORDER TODAY!**

**Toll Free 1-800-642-2536**

**Florida 305-493-8355**

or send Check or Money Order to:




**NIBBLE NOTCH® COMPUTER PRODUCTS**

4211 NW 75th TERRACE • DEPT. 15 • LAUDERHILL, FL 33319

## Parents! Want to stimulate your child's learning?

### TCE'S EARLY LEARNING SERIES



#### ABC'S In Color

Speed your child's learning of the Alphabet!

CoCo 16K ECB Tape \$19.95 Disk \$25.95

#### Alpha Memory

Your child can master the lower and upper case letters of the alphabet while having fun!

CoCo 16K Tape \$16.95 Disk \$20.95

#### Basic Math

Learn to add & subtract through counting!

CoCo 16K ECB Tape \$12.95 Disk \$16.95

#### Mix & Match

A brilliantly colored constantly moving computer version of concentration!

CoCo 16K Tape \$12.95 Disk \$16.95

#### Mr. Bear Flash Card

After your child has mastered Mr. Bear Math, continue his/her learning, experience with Mr. Bear's multiplication & division flash card.

CoCo 16K Tape \$15.95 Disk \$19.95

#### Mr. Piggy

Program will aid your child in learning the value of money!

CoCo 32K ECB Tape \$19.95 Disk \$24.95

#### Mr. Bear Count

A counting program that will tantalize the youngest member of your family!

CoCo 16K Tape \$15.95 Disk \$19.95

#### Mr. Bear Math

Add & subtract with Mr. Bear. Your child will gain Mr. Bear's wink of praise & approval!

CoCo 16K Tape \$15.95 Disk \$19.95

**Over 75  
Titles!**

#### See & Spell


Let your computer aid your child in learning to spell!

CoCo 16K ECB Tape \$14.95 Disk \$18.95

#### Teaching Clock

Learn to tell time with the aid of a special teaching clock!

CoCo 16K ECB Tape \$16.95 Disk \$19.95

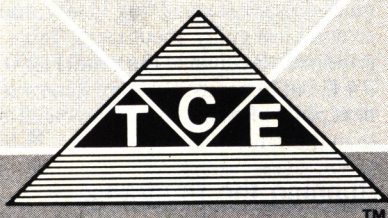

*Programs Have Been Child, Parent, & Educator Tested!*

**Send for  
FREE Catalog**

**TCE EDUCATION DIVISION**  
P.O. BOX 2477  
GAITHERSBURG, MD 20879


1-800-4TC-4TCE

(301) 963-3848



Circle Reader Service card #387



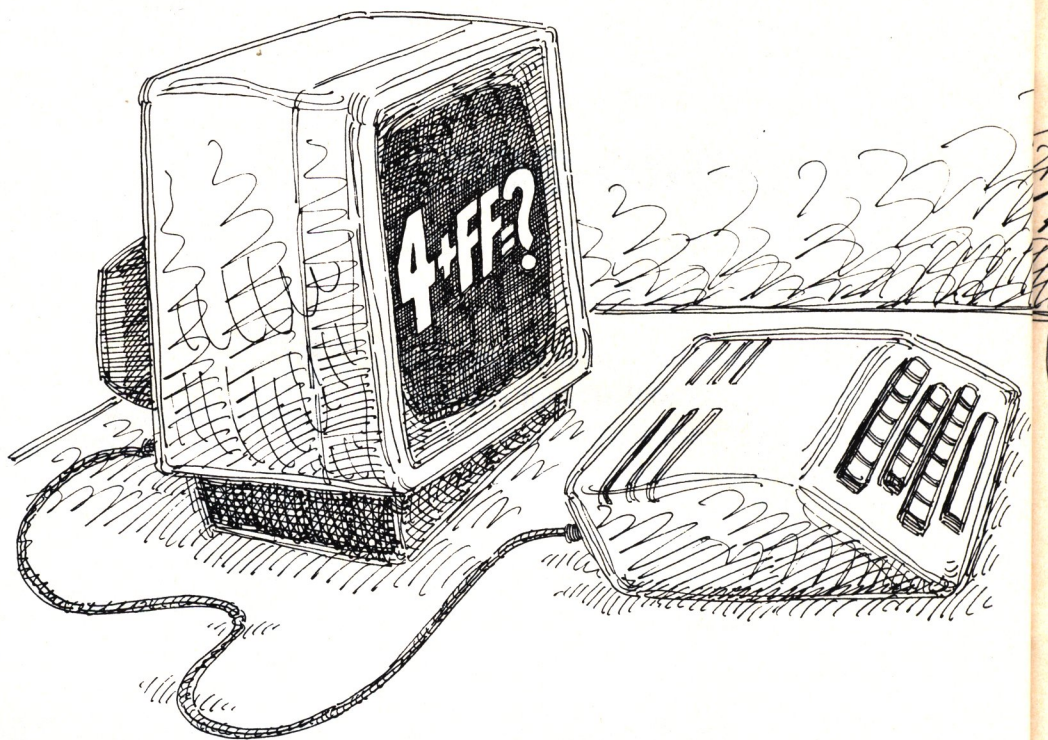

# How Your CoCo Adds Up

Test your binary and hexadecimal knowledge with these drills.

**H**ere are a series of drills to help you learn the four logical and mathematical functions that your computer performs: binary OR, binary AND, binary addition, and hexadecimal addition.

## OR and AND

Binary OR and AND are logical operations that compare two values bit for bit. The outcome of OR is true (i.e., equal to one) if at least one of the inputs is true. This means that OR is false (i.e., equal to zero) only when both inputs are false. In contrast, the outcome of AND is true only if both inputs are true. The logic diagrams in Table 1 show all possible outcomes of OR and AND when there are two inputs.

## Binary and Hexadecimal Addition

Binary addition is easy to learn, but because you work with only zero and one, you have to make carries much more frequently

in binary addition than in decimal addition. Two simple rules make carrying out to the next place easy:

$1 + 1 = 0$  with a carry out of 1  
 $1 + 1 + 1 = 1$  with a carry out of 1

As in the decimal system, you work binary addition from right to left.

Hexadecimal notation uses the decimal digits zero through nine and letters A through F. Adding hexadecimal numbers is more difficult than adding binary numbers, so don't feel guilty about using Table 2 as a crib sheet. It contains the results for  $0 + 0$  to  $F + F$ , but remember to carry a one out to the next place when the sum of two digits is more than the value of F.

## Running the Programs

Listing 1 is for binary OR. By making simple modifications in this program, you can

OR	0	1	AND	0	1
0	0	1	0	0	0
1	1	1	1	0	1

Table 1. Binary OR and Binary AND

## System Requirements

CoCo or MC-10  
4K RAM  
Color Basic or  
Micro Color Basic





Illustration by Peter Bono

use it to practice binary AND and binary addition. Be sure to save each version of the program you'd like to go back to later.

Enter and run Listing 1. A problem appears at the top of the screen. When you submit an answer, the program tells you whether you are right or wrong. If the answer is wrong, you must try the problem again. When you want to practice AND, press break to stop the program. Then make the following line changes to Listing 1:

```
30 PRINT@10,"BINARY AND"
210 PRINT@97,"AND";
390 IF A < > (H1 AND H2)GOTO420
```

Enter and run this new listing and save a copy to tape if you want. To advance to practice with binary addition, repeat the above procedure, this time making these line changes:

```
30 PRINT@8,"BINARY ADDITION"
40 H1 = RND(128) - 1:H2 = RND(128) - 1
210 PRINT@99," + ";
390 IF A < > (H1 + H2)GOTO420
```

For the problems in hexadecimal addition, type in Listing 2 and run it. The program will accept inputs other than hexadecimal, so be careful. ■

See program listing on page 52

Address correspondence to: Frank Tipps,  
1837 Cartlen Drive, Placentia, CA 92670.

+	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	0
2	2	3	4	5	6	7	8	9	A	B	C	D	E	F	0	1
3	3	4	5	6	7	8	9	A	B	C	D	E	F	0	1	2
4	4	5	6	7	8	9	A	B	C	D	E	F	0	1	2	3
5	5	6	7	8	9	A	B	C	D	E	F	0	1	2	3	4
6	6	7	8	9	A	B	C	D	E	F	0	1	2	3	4	5
7	7	8	9	A	B	C	D	E	F	0	1	2	3	4	5	6
8	8	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7
9	9	A	B	C	D	E	F	0	1	2	3	4	5	6	7	8
A	A	B	C	D	E	F	0	1	2	3	4	5	6	7	8	9
B	B	C	D	E	F	0	1	2	3	4	5	6	7	8	9	A
C	C	D	E	F	0	1	2	3	4	5	6	7	8	9	A	B
D	D	E	F	0	1	2	3	4	5	6	7	8	9	A	B	C
E	E	F	0	1	2	3	4	5	6	7	8	9	A	B	C	D
F	F	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E

Table 2. Hexadecimal Addition



Continued from p. 39

made. It uses high-quality parts and its workmanship is first rate. The circuit board is made of a heavy-duty material. The pins that connect it to the original socket look more like nails than pins and so are unlikely to create a faulty connection. Installing the Dual DOS Card is easy. Follow the instructions that come with it. Take the four screws out of your J&M Disk Controller's case and set the top aside. Remove the chip marked U6 and plug it into the Dual DOS Card. Plug your other ROM or EPROM into the remaining socket on Dual DOS. Then plug the new card into the empty socket left by the U6 chip on the controller board. The final touch is installing the switch on the cover of the controller's case.

For some configurations you have to cut a trace and solder a jumper on the underside of the board. This is not a difficult procedure, but it requires tools and confidence. Dual DOS Card's instructions show you where to scrape through the trace with a sharp blade. You can use any soldering iron and thin solder to make the jumper.

## Documentation

Dual DOS's instructions, including diagrams of the card, are printed on both sides

of a single sheet of paper. They are adequate if you have installed ICs before, but come without important information that a novice might need. The directions explain the switch settings, cover the installation of various configurations, and take you through cutting traces and soldering jumpers. But they refer to pin-numbers without ever providing a pin-out diagram or explanation of pin-number locations. This information is critical to the proper installation of Dual DOS, and its absence could lead to damage of your equipment. The following explains the pin numbering.

Both the socket and chip have a white dot or carved notch at one end. You match the dot or notch on the chip with the dot or notch on the socket when you connect them. To determine pin number 1, hold the chip with the dot or notch end up. Pin number 1 is the one closest to the notch or dot on the left side, and the numbers run counterclockwise around the chip.

## Performance

Once you have Dual DOS Card installed, its operation is simple. To go from one ROM to the other, you just flip the switch. Setting the switch in the center position reverts the com-

puter back to Extended Color Basic. The only drawback is that you can't make a switch from software because switching DOSes forces the computer through a cold start for resetting pointers. Because of the cold start, you lose whatever is in memory.

Dual DOS operates flawlessly. If you take advantage of everything it offers, it will give your computing a whole new flavor. RGS Micro had the JDOS controller in mind when creating Dual DOS Card, and J&M's product works very well with it. The card will probably work with controllers manufactured by other companies, too. Dual DOS also works with other DOSes on a ROM or EPROM chip that you plug into the controller. The ability to have different DOSes available for different applications, including, perhaps, a DOS tailored to suit your specific needs, gives the CoCo a versatility that will spoil you. ■

*The Dual DOS Card is manufactured by RGS Micro Inc., Main St., Derby Line, VT 05830, 800-361-4970. It works with any Color Computer but requires a third-party disk controller, such as J&M's JDOS controller. Dual DOS Card sells for \$19.95 plus \$4 for shipping.*

# Typing with Zookey

by Dennis W. Peterson

	meets	maintains	documentation
	objective	interest	ease of use
6			
5			
4			
3			
2			
1			
OVERALL RATING			4.25
Educational Software			

**Z**ookey is a typing tutorial and a game that is a great deal of fun to play. If you put on your halo and follow the simple directions, Zookey could be instrumental in teaching you how to type. But some of the game's built-in temptations could work against good typing instruction. Learning with Zookey depends on the willpower of the user.

Zookey's screen is divided into eight columns, each of which has a caged animal at its top. The program displays letters, numbers, or symbols along the bottom of the screen. In the middle of the screen there is a trap door through which the animals at the top try to escape on a random basis. You stop them from escaping by pressing the key that corresponds to the letter, number, or symbol at the bottom. If you press the correct char-

acter in time, a little zookeeper rushes to the trap door and locks it. If you don't press the right key in time, the animal gets away. The game ends if five animals escape.

Zookey lets you choose the kinds of characters that appear at the bottom of the screen. You might want to work on numbers instead of letters, for example. The tutorial also lets you choose speed and skill levels. You can make selections for each of these categories on a scale of 1 to 8. If you choose 1 for both categories, Zookey is a mild typing-tutorial game. Selecting 8 for both categories makes even skilled typists wonder about their abilities. The speed category determines how fast the animals descend to the trap door. The skill category controls the number of animals that descend (almost simultaneously in the higher levels).

Zookey's directions are clear and include a typist's diagram for the CoCo keyboard. The diagram and directions make it easy to figure out the proper key fingerings. As a game, Zookey's concept becomes apparent quickly. It is easy to use. Although the documentation does not mention it, pressing the enter key pauses the game. Pressing it again restarts the game. Zookey commands a high interest level. It is fun, even if you don't want to learn to type.

Zookey could be improved by having an elementary screen in which each of the eight columns corresponds to a finger to help young and new typists with finger control. Zookey would also gain by being able to download through a Network II controller, making it a viable classroom supplement.

Does Zookey teach typing? Not if you select a skill or speed level that is too high. At high levels, many people will be given to random key mashing just to raise the score. But if you are the kind of person who reads the directions and sticks to them, you could learn a great deal about using a keyboard from this program. Zookey relies on a responsible attitude on the part of students using it in order to teach typing. But at worst, students will gain a better understanding of the CoCo's keyboard. Those who apply themselves will learn to type. And Zookey is entertaining for all. ■

*Zookey is manufactured by Mark Data Products, 24001 Alicia Parkway, No. 207, Mission Viejo, CA 92691, 714-768-1551. It requires 16K and sells for \$24.95 on cassette and \$27.95 on disk, plus \$2 for shipping.*



# Remarkable CoCo Logo

by Richard Ramella

	organization thoroughness	production readability	quality
6			
5			
4			
3			
2			
1			
<b>OVERALL RATING 4.50</b>			
Books			

You could say that *CoCo Logo* by Dale Peterson, Don Inman, and Ramon Zamora is a series of letters about the life of Uncle Bert Woofensburger, a Michigan pig farmer, written to his niece Molly. But then it doesn't sound like an educational computer book, does it? That's the charm of *CoCo Logo*. It takes a whimsical approach to teaching Logo that doesn't overpower its ability to educate. And it manages to cover much of what there is to know about Radio Shack's Color Logo. For example, its folksy chapter beginnings about turtles under the house, visits to the fair, and eating spaghetti are amusing, but they also correlate with the in-

formation in the chapters and help teach readers how to program in Color Logo.

*CoCo Logo* is the best of five books I've seen on the topic of Color Logo. The original Uncle Bert letters were published by *The Rainbow*. They have been reedited, footnoted, and reorganized in a sequence that describes the use of Color Logo in a logical fashion.

The format of the book makes it enjoyable and easy to read. Uncle Bert is no computer genius. In fact, at the start he is just as puzzled about Logo as any beginner. But he makes clever mistakes in an often delightfully tongue-in-cheek manner. Uncle Bert is a reassuring character because he offers the wisdom of age, a friendly willingness to admit error, and the encouragement to keep trying. And even though Uncle Bert lives in a rustic setting, he is no hayseed. He's apt to break into Latin or cite arcane facts—the kind of material that kids skip over easily and adults often enjoy.

*CoCo Logo* deals out Color Logo in small bites with follow-along instructions. One of the teachings of the book is that Logo is a debugging process. What is right for one person might be wrong for another. The pro-

grammer's aim should be to get the program to carry out the plan.

The first chapter tells how to set up your system and get the program to run. Bert is mildly puzzled but manages to make the Logo turtle perform a few rudimentary travels, draw a doghouse, and learn for himself the different operating modes: break, edit, run, and doodle. In some of the later chapters I found new understanding and new ways to use Logo capabilities.

The beauty of *CoCo Logo* is its pace. Interested children as young as eight or nine will be able to follow the text. The authors are aware that Logo was not designed as a predetermined set of procedures to which all must adhere, but as a discovery process for the learner that can go in many directions by fostering understanding and new ideas about Logo. ■

*CoCo Logo* was written by Dale Peterson, Don Inman, and Ramon Zamora and published by John Wiley & Sons, New York, NY, 1985, softcover, 127 pp., \$12.95.

# Sounding Out Tandy's Sound/Speech Cartridge

by Gary W. Clemens

	construction set up	quality	documentation	performance	ease of use
6					
5					
4					
3					
2					
1					
<b>OVERALL RATING 3</b>					
Hardware					

The Sound/Speech Cartridge is Radio Shack's entry into the talking-CoCo craze. It is a ROM-pack device based on General Instrument's PIC 7040-510 System Software. Its microprocessor controls separate speech and sound generators and routing of sound through the CoCo to the TV output. It has text-to-speech capability, can play three-part musical harmony, and create complex sound effects.

The Sound/Speech Cartridge is designed for use with game, education, and other applications; it is also programmable. It has 16

sound and speech storage buffers (eight of each), which provide space for eight 64-byte sound effects and eight 64-character sentences. The Cartridge also offers three voices in a nine-octave range.

The Sound/Speech Cartridge works with disk, cassette, and ROM-pack programs, but disk and ROM-pack users need a Y cable or a multiple ROM-pack interface. It is compatible with JDOS as well as Disk Extended Color Basic.

You generate speech with this synthesizer by preprogramming "allophones," small units of speech (sounds or syllables) that you store as hex or decimal codes in the buffers. You generate sound effects by modifying the built-in commands to redefine the channel, amplitude, pitch, and duration or by manipulating the Cartridge's registers.

## Performance

The speech function of this synthesizer sounds mechanical, lacking the timbre and

inflection that we are accustomed to hearing in human speech. But the product is a step above the speech imitation attempt of commercial software and about on par with the Votrax chip used in some other voice synthesizers.

Speech-generation firmware has limitations, however. Even with the 59 allophones the Sound/Speech Cartridge offers, it is difficult to generate many words. I found that discovering how best to program a word is very often a matter of trial and error, despite the theory that if an allophone table is complete, proper combinations of allophones can reproduce any word in the English language.

Before I received this product, I anticipated it to be an ideal device for speech-handicapped individuals. But the need for users to alter spellings of so many words could be too great a shortcoming for that application. What is lacking is software designed to translate keyboard entries so the Cartridge can interpret them in a way that correctly imitates human speech.



The musical sounds that the Sound/Speech Cartridge produces do not mimic the sounds of musical instruments, but they can reproduce recognizable melodies. The Cartridge creates a purer tone than you can accomplish with Basic's SOUND command. But some commercial machine-language software produces musical sounds that are as good or better.

The Sound/Speech Cartridge lacks many of the components necessary to create musical scores. Its most complex chords have only three notes, and you can't generate simultaneous chords and harmony. There is also no easy way to create echo and reverberation, standard functions of many music synthesizers.

What the Sound/Speech Cartridge can do is produce sound effects. All of the pops, whistles, explosions, gunshots, and other noises commonly used in games are not only possible but in many cases sound much better than their software-created counterparts.

## Documentation

The Sound/Speech Cartridge comes with a comprehensive 56-page manual that includes sections on programming text to speech, us-



The Sound/Speech Cartridge from Radio Shack

Circle Reader Service card #91

# MUL-T-SCREEN



## COLOR CHARACTER GENERATOR A NEW DIMENSION IN COLOR COMPUTING



- Now includes a character generator and sample graphic space game at no extra cost.
- Full 224 text and graphic characters. Underline in all PMODES. Prints vertically.
- All machine language, user transparent. Supports all BASIC, EXTENDED BASIC and DISK commands.
- Automatic loader recognizes 16K, 32K & 64K computers.
- Mix up to 5 character sizes in 4 colors all on one screen. A total of 10 sizes available from 8\*4 to 42\*24 or 32\*32 in vertical mode.
- Use up to 4 defineable window screens of any size. Also includes horizontally scrolling (crawling) one line screens.
- Includes positive & negative screen dumps in 2 sizes for R/S, Epson & Gemini printers. ( Please specify )
- Special Trace Delay can be used to debug programs one line at a time ( even graphics ).
- A special printer control can output characters to the screen & printer simultaneously.
- A must for all color computer owners. Once you try it you won't write another program without it.

## INCENTIVE SOFTWARE (519) 681-0133

P.O. BOX 323  
STATION B  
LONDON ONTARIO  
CANADA N6A 4W1

P.O. BOX 7281  
PORT HURON  
MICHIGAN 48301  
U.S.A.

MINIMUM REQUIREMENT	16K BASIC
TAPE - 24.95 US or 29.95 CDN	
DISK - 27.95 US or 32.95 CDN	



Tape to Disk upgrade available for \$8US or \$10CDN. We pay postage within US & CANADA on orders over \$20, otherwise please add \$1. Other countries please add \$2. Charge orders please add \$1.



ing allophones, programming sounds, shaping sound envelopes, and gaining direct access to the registers. It also has eight appendices, including one on sound-generator registers, a command-instruction map, allophone address tables, the chromatic scale, and several demonstration programs.

As a result of this battery of information, the manual is, at best, very technical. Non-programmers will probably find the reading to be heavy going. Most of the manual's sections were written for programmers who have a good understanding of machine language. The sections dealing with sound and music are probably the most inaccessible. There is little information that uses musical notation, so having a music background won't help.

To make the Sound/Speech Cartridge produce sound effects or music, you enter a command that loads one or more buffers and follows by data groups of 3 or 4 postbytes. Each data group defines a tone, noise, or envelope. The manual has postbyte tables for each sound quality. They chart definitions for the bytes belonging to each postbyte of the various sound qualities. None of these terms are defined, however. Nor are there step-by-step explanations to help novices get

started. The manual presumes that you already have a good understanding of the terms it uses.

Nontechnical users will probably have the most success with the demonstration programs. One of them, for example, allows the CoCo to emulate an organ that can play 16 notes beginning with the A above middle C. Another "speaks" whatever you type into the computer, but it has a limited usefulness. Some of its words are fairly distinct, but others are unintelligible. To overcome this you have to misspell many words, which could encourage poor spelling, especially among children.

### **Ease of Use**

Some of the Sound/Speech Cartridge demonstration programs that accept keyboard input are easy to use because pressing the correct key provides almost immediate results. But programming sound or speech is a difficult matter. You must type each syllable or unit of sound and its associated qualities into DATA statements byte by byte. Even programmers who are comfortably familiar with the terminology the manual uses will have to go through a trial-and-error process, sorting through combinations of sound or speech units to obtain the results they desire.

### **Set Up and Construction**

Setting up the Sound/Speech Cartridge is as easy as plugging in a ROM pack and typing in one of the programs from the instruction manual. If you are using a monitor, your CoCo must have an audio output because the Cartridge does not have a speaker. Disk users who have Radio Shack's Multi-Pak Interface may put the Cartridge in any slot other than slot four.

The Sound/Speech Cartridge is well constructed and has a heavy plastic housing. The power contact strip on its edge-connector card is shorter than the other contacts to reduce the risk of burning out your cartridge or computer if you forget to turn off the power before inserting the ROM pack. One feature found on most ROM packs and missing from the Cartridge is a sliding door for covering the contacts when it is not in use.

### **Summary**

The Sound/Speech Cartridge can generate speech, a wide variety of sounds, and enhance game and education programs. But it requires perseverance and programming effort. If used by speech-handicapped individ-

Circle Reader Service card #214

# **You're in good company...**

## **These are some of our other valued customers**

ADM Technology, Inc.

AT&T Technologies

Bethel College

E.I. DuPont

Florida International University

Georgia-Pacific Corporation

GM Technical Center

Hoffmann-La Roche, Inc.

Indiana University Northwest

International Minerals & Chem., Corp.

Marquette University

Mercy Hospital

Motorola Inc.

Motorola Comm. & Electronics, Inc.

National Video Services, Inc.

Niagara College

Oregon State University

RCA Corporation

Robertshaw Controls Company

Rutgers-The State University

Salecater Displays Corporation

Seiscor Technologies, Inc.  
(A Subsidiary of Switchcraft, Inc.)

Sonoma State University

Southwire Company

The John Hopkins University

The Singer Company

University of Wisconsin-Madison

Union Carbide

University of Southern California

US Environmental Protection Agency

Verbatim Corporation

WCVB-TV

Yeshiva University



*"Innovative Products for the CoCo User"*

Call or write today for our **FREE** Catalog  
P.O. Box 813 • North Bergen, N.J. 07047 • 201-330-1898



uals in conjunction with software that is as yet unavailable, it has the potential to be a valuable aid.


Because it is difficult to understand the Cartridge's monotone speech in phrases that are longer than a few words, it is unlikely that the Sound/Speech Cartridge could perform well as a talking tutor in its present

form. It could, however, be useful for some applications, such as brief program instructions and menu selections. Although the Sound/Speech Cartridge has some advantages, it is also expensive. You might want to investigate and compare other synthesizer products for the CoCo before making a purchasing decision. ■

*The Sound/Speech Cartridge is manufactured by Tandy Corp. (Catalog No. 26-3144), 1400 One Tandy Center, Fort Worth, TX 76102. It requires 16K and runs with cassette or disk. It sells for \$99.95.*

## T/S Edit to a T

by Jeffrey S. Parker

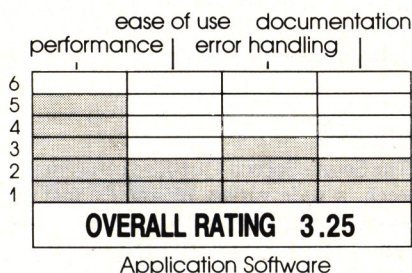

**H**ow often have you wished you could write a simple text file without getting dizzy from the checkerboards? How many times have you sat in front of your CoCo wishing it had an easy-to-live-with editor? Are you an OS-9 user who still can't believe the system doesn't include lowercase characters? Are you using a macro text editor that is not providing what you need?

T/S Edit might be for you. This is one of the most sophisticated disk-based utilities to come along since OS-9's introduction. T/S

Edit is a text/screen editor that edits program lines as well as text files. It incorporates 10 choices for screen-display size and four choices for screen-display colors. The program comes fully equipped with a lowercase letter display with true descenders and file-merging capability. It can also simulate an 80-column display with horizontal scrolling.

T/S Edit might be intimidating at first. Because it can handle OS-9 and Radio Shack DOS, it has several options for loading and running. T/S Edit's operating commands are

## NEW Full Character Set FOR CoCo or CoCo2

Easy to install board adds:

- All 96 Standard ASCII Characters
- Upper & Lower Case Displayed Simultaneously with **NO** Inverse Video
- True Lower Case Descenders
- Braces & Vertical Bar Characters
- Slashed Zero
- Other Features

Board is hardware driven and requires **NO** software drivers. **NO** effect on **any** memory.

Enhances CoCo screen for:

- OS-9 Operating System Programming
- "C" Language Programming
- Word Processing
- Communications Terminal Modes



PRICE.....\$38.00  
(+\$2.00 shipping/handling if charge)

**CoCo Devices**  
**Box 677, Seabrook, TX 77586**  
**713-474-3232**

Visa

(Specify CoCo or CoCo2)

Mastercard

Circle Reader Service card #75

Circle Reader Service card #236

## FREE 10 DISKETTES OR 20 C-20 CASSETTES

A subscription to the 'Coco-Cassette' gets you a tape or disk full of 10 **quality programs** delivered to you by first class mail every month. The documentation included will help you run great **utilities** like 'Word Processor,' and 'Budget Analyzer,' or enjoy great **games** like 'Frogjump' and 'Caterpillar Cave' **FOR AS LITTLE AS 46 CENTS EACH!**

★ **Limited offer** ★ Subscribe for a year on cassette and receive **20 Free C-20 cassettes** or subscribe for a year on disk and receive **10 Free 5 1/4 single sided double density diskettes!**

Now available on disk!



### PRICES

	TAPE	DISK
1 YR (12 ISSUES)	55 <sup>00</sup>	70 <sup>00</sup>
6 MO (6 ISSUES)	30 <sup>00</sup>	40 <sup>00</sup>
Single Copies	6 <sup>00</sup>	8 <sup>00</sup>

- ★ 16K extended required
- ★ Some programs require 32K, and/or disk
- ★ Over 3000 satisfied customers
- ★ Back issues available from July '82 (over 280 programs to choose from!)
- ★ Also available for Commodore 64.

Mich. Res. add 4%  
Overseas ADD \$10 to subscription and \$1.00 to single issues.

PERSONAL CHECKS WELCOME!

**T & D Subscription Software**  
P.O. BOX 256-C  
HOLLAND, MI 49423  
(616) 396-7577





almost identical within the two DOSes. The only differences come into play when you are reconfiguring the program's default parameters. You change Radio Shack DOS parameters by editing Basic program lines; in OS-9 you rewrite a default parameters file.

Once you have learned its commands, T/S Edit is a very effective and versatile text editor. Becoming comfortable with the program's commands, however, can be somewhat difficult. T/S Edit uses a series of one-and two-key commands. One difficulty with following the command sequences is that the program requires you to use upper- and lowercase letters that have different meanings. This can cause some confusion. You might find yourself chasing the cursor around the screen at first until you memorize the key combinations you need.

T/S Edit has options for screen color and display format that you can change at any point in the editing process. I found black characters on a green background in the 40-column by 24-line display mode to be the best format in which to work. These are the only parameters that you can change during the actual editing process; you have to change all others, such as printer baud rate, before entering the editor.

T/S Edit offers several powerful features, including global search and replace, "yank" (which lets you copy text to another place in the file without erasing the original), and undo features. It also has a feature for stacking files in the edit buffer, which lets you select several files in advance and edit them one at a time. Once you accomplish an editing task, T/S Edit rewrites all the changes to the file under the original name.

A nice feature of the OS-9 version of T/S Edit is that you can call a shell command from the edit mode, meaning that you can access a directory, for example, from the editor and return to the editing process immediately following the execution of the command. And you can exit the editor and enter OS-9 by using just one command.

T/S Edit comes with a well-organized, 33-page manual. It is arranged in a logical order, covering everything from loading the program and its editing commands to a glossary of keyboard codes and a summary by function of all T/S Edit commands. The complexity and variety of these commands make it important to read all sections of the manual for a full understanding of command usage. I strongly recommend that users practice the commands. Although the documentation

covers everything, it skimps on examples of usage. It expects its readers to bring some understanding of text editors with them. Once you have a working knowledge of the program's editing commands, the "quick reference guide" that comes with the documentation is very helpful.

T/S Edit is a powerful and sophisticated text-handling program. It has all the features you need and some added options for more serious editing. Its ability to run on OS-9 and Radio Shack DOS makes it a good investment for OS-9 users. And despite a lack of explanatory examples, its documentation is well organized and generally thorough. The program's extra features—high resolution, upper- and lowercase display, and horizontal scrolling—make it a bargain and go a long way in contributing to its overall ease of use and performance. I recommend T/S Edit to anyone who doesn't mind spending a little time getting to know how to use it. ■

*T/S Edit is manufactured by Tandy Corp. (Catalog No. 26-3264), 1400 One Tandy Center, Fort Worth, TX 76102. The program requires a disk drive, 32K for Radio Shack DOS, and 64K for OS-9. It sells for \$34.95.*

Circle Reader Service card #175

# WHITE HOUSE COMPUTER

We carry a full line for the Atari, Apple & C-64.

P.O. Box 4025, Williamsport, PA 17701 — (717) 322-7700

HOURS: Monday - Friday 9 am - 6:00 pm / Saturday - 9:00 am - 3:00 pm

VISA & MC  
Accepted 4%



## DISK DRIVES

**Atari**  
Indus GT ..... 259.00  
1050 ..... 169.95

**Commodore**  
Indus GT ..... 255.00  
1541 ..... 235.00

**MSD Drives**  
Single MSD 1 ..... 309.00  
Dual MSD 2 ..... 485.00

**Blue Chip**  
100% Compatible  
C-64 Disk Drive  
Double Density ..... 225.00

## DISKETTES

**SKC**  
SS/SD ..... 11.95  
SS/DD ..... 14.95  
DS/DD ..... 16.95

**Maxell**  
MD-1 ..... 18.95  
MD-2 ..... 23.95

**Elephant**  
SS/SD ..... 14.95  
SS/DD ..... 16.95  
DS/DD ..... 21.95

**Innovative Concepts**

Flip-N-File ..... (10) 3.95  
Flip-N-File ..... (15) 8.95  
Flip-N-File ..... (25) 18.95  
w/lock  
Flip-N-File ..... (50) 17.95  
Flip-N-File ..... (50) 23.95  
w/lock  
Flip-N-File ..... 17.95  
ROM Holder

**Koala**  
Atari & C-64  
Koala Pads ..... 49.95

**WICO**  
Bat Handler Joy Stick ..... 16.95  
3-Way Deluxe ..... 21.95  
Boss ..... 13.95

**SOFTWARE**  
1010 Recorders ..... 45.00  
Atari Key Pads ..... 29.00  
Atari Writer ..... 39.95

**Batteries Included**  
Paper Clip w/SPELL PK ..... 69.95  
Paper Clip ..... 59.00  
Home Pack ..... 32.95  
Bus Card ..... 137.95  
BI 80 Board ..... 137.95

**Broderbund**  
Atari  
Print Shop ..... 31.95  
Bank Street Writer ..... 39.95  
Spelunker ..... 21.95  
Stealth ..... 21.95  
Loderunner ..... 22.95

**C-64**  
Print Shop ..... 31.95  
Bank Street Writer ..... 37.95  
Spelunker ..... 21.75  
Stealth ..... 21.75  
Loderunner ..... 22.95

**INTERFACES**  
MPP 1150 ..... 64.95  
Upright N Port ..... 59.00

**Apple Dumping GX** ..... 65.00  
MPP 1152 Buffer Kit ..... 19.95

**Atari 850** ..... 115.95  
**Cardco B** ..... 35.95  
**Cardco G** ..... 59.95  
Micro Stuffer 64K Printer  
Buffer ..... 105.00

## PRINTERS

**Star Micronics**  
10X ..... 225.00  
15X ..... 340.00  
Delta 10X ..... 335.00  
Delta 15 ..... 445.00  
Radix 10 ..... 495.00  
Radix 15 ..... 585.00  
Powertype ..... 309.00

**Legend**  
880 ..... 220.00  
1080 ..... 240.00  
1200 ..... 250.00

**Atari**  
1020 ..... 59.00  
1025 ..... 189.00  
1027 ..... 239.00

**Commodore**  
1526 ..... 259.00

**Juki**  
6100 ..... 379.00

**Blue Chip**  
M12010 C-64 ..... 259.00

**Epson Printer**  
RX 80 ..... 219.00  
RX 80FT ..... 259.00  
RX 100 ..... 369.00  
FX 80 ..... 385.00  
FX 100 ..... 555.00  
JX 80 ..... 529.00  
LQ 1500 P ..... 1089.00  
LQ 1500 S ..... 1149.00

**Cardco Printer**  
LQ-1 ..... 379.00  
LQ-3 ..... 289.00  
(with Atari/Commodore Interface)

**DUST COVERS**  
**PRINTER RIBBONS**  
**PRINTING PAPER**

## C. Itoh Printers

8510 A ..... 285.00  
8510 BC2 ..... 389.00  
8510 BP1 ..... 339.00  
8510 SP ..... 389.00  
8510 SR ..... 429.00  
8510 SCP ..... 459.00  
8510 SCR ..... 489.00  
1550 BCD ..... 529.00  
1550 P ..... 485.00  
A10-20P ..... 465.00  
F10-40 P/S ..... 875.00  
F10-55 P/S ..... 1059.00  
F10 Tractor ..... 169.00  
F10 Sheet Feeder ..... 349.00

**Okidata Printer**  
I-82 ..... 229.00  
83 ..... 545.00  
84 ..... 645.00  
92 ..... 349.00  
93 ..... 565.00

**Image Writer** ..... 425.00  
**Okimate 10** ..... 179.00

**Mannseman Tally**  
Spirit 80 ..... 249.00  
MT 160L ..... 495.00  
MT 180L ..... 595.00

**Panasonic**  
1090 ..... 199.00  
1091 ..... 265.00  
1092 ..... 399.00  
1093 ..... 599.00  
3151 ..... 475.00

## MODEMS

**MPP 1000C**  
**99.74**

**Mighty Mo**  
w/Software ..... 79.95  
TeleCommunications ..... 69.95  
Westridge ..... 79.95  
Hayes 300 ..... 199.00  
Hayes 1200 ..... 469.00  
Apple Cat II ..... 265.00  
Compuserve ..... 24.95

## MONITORS

**Zenith**  
122 ..... 85.95  
123 ..... 75.95

**NEC**  
1201 Green ..... 139.95  
1205 Amber ..... 139.95  
1260 Green ..... 97.00

**Amdek**  
300 Green ..... 135.00  
300 Amber ..... 145.00  
Color 300 ..... 250.00

**Teknika**  
MJ-10 Composit &  
Separate Video ..... 235.00  
MJ-22 RGG Composite &  
Separate Video ..... 289.00

**Dealers Inquiries  
Invited**

**POLICY:** No deposit on COD orders. FREE freight on all pre-paid cash orders over \$300 in the continental USA. APO & FPO add \$5 per hundred. For priority mail add \$8 per hundred. PA residents add 6% sales tax. Defective products must have Prior RA number. Schools net 15.

Ask About Phone Rebates!



# 6809 on Line

by Bobby Ballard

## A Buffer for Videotex

From the letters you write and the questions I see on BBSes, many people are still trying to find the save and print features for Videotex, a terminal program from Radio Shack that only supports reading data on screen.

Ironically, the Videotex manual states that it stores the "last 31 pages in the text buffer." That's great, unless you want to use the information another day or load and run it as a program. There is no save-to-tape or line-printer feature, and apparently many of you would like a solution to this problem.

Bufertext (see Program Listing), which examines RAM and lets you copy most of your Videotex buffer to tape or paper, is that solution. Notice I said most of your buffer. You copy RAM to screen, tape, or printer and re-save it in ASCII format. You lose some of the first pages you download to Bufertext, so keep your Bufertext files short to avoid overwriting any more buffer space than necessary.

Written for 16K Extended Color Basic, Bufertext runs on 32K and 64K as well and can be modified to run on nonextended machines. If you have more than 16K, change the value of ER in line 30 to &H7FFF.

Type in the program, and save it to tape as Bufertext. Then disable the ROM-pack auto-start on Videotex by holding the ROM pack with the sliding door facing you and the edge connector pointed toward the ceiling. Slide the door down to reveal 14 metal strips. The first strip on the left is the cartridge-interrupt line. Place a piece of masking tape over this connection only. With your CoCo's power off, plug in the modified ROM pack. When you turn on the power, you should see the normal sign-on for Basic. If you don't, go back and check to make sure the tape is in the correct place and holding. Caution: Never insert or remove a ROM pack with the CoCo turned on.

Next, type EXEC 49152 and press the enter key followed by the break key. You will be greeted with Videotex's "Place Call" prompt. Follow normal procedure for Videotex and the services you call. Bufertext writes over some of RAM during loading. When you end your call and save the buffer, you reinitialize and Basic writes over certain sections

of memory. So it is a good idea to download important information more than once, giving yourself several copies "stacked" in memory. With multiple copies, you can edit to get a complete document.

End your phone session as usual and get ready to save your work. First, press the reset button on the back of the computer. The Basic header appears again, but don't worry.

*This program is available on our Instant CoCo cassette.*

```
5 'BUFFTEXT(C)'85 BOBBY BALLARD
10 'SR=START OF RAM,ER=END RAM,S
P=SCREEN POSITION
20 'PV=PRINTER ASCII VALUE,CC=CH
ARACTER COUNT
30 SR=&H6000:ER=&H3FFF:TP=0
40 CLS:PRINT@43,"buff-tex
50 RS=INKEY$:IF RS="" THEN 50
60 FOR SP=1024 TO 1503 STEP 1
70 POKE SP,PEEK(SR):POKE SP+1,&H
7E
80 SR=SR+1:NEXT SP:TP=TP+1
90 PRINT@482," CONT PRINT SAVE
TP="TP;
100 RS=INKEY$:IF RS="" THEN 100
110 IF RS="C" THEN CLS:GOTO 60
120 IF RS="P" THEN GOSUB 510
130 IF RS="S" THEN GOSUB 610
140 GOTO 90
500 'PRINT TO PAPER
510 FOR SP=1024 TO 1503 STEP 32:
FOR CC=0 TO 31
520 P=PEEK(SP+CC) AND 127:GOSUB
1000
530 PRINT#-2,CHR$(P);:NEXT CC:PR
INT#-2:NEXT SP
540 RETURN
600 'ASCII SAVE TO TAPE
610 CLS:LINEINPUT" STARTING PAG
E # ";SS
620 LINEINPUT" ENDING PAGE # ";
ES
630 LINEINPUT" .FILENAME (8): ";
FS
640 PRINT@325,"READY TAPE-PRESS
ENTER"
650 RS=INKEY$:IF RS="" THEN 650
660 CLS:PRINT@45,"saving":PRINT@
172,FS
670 PS=VAL(SS):PE=VAL(ES):MS=153
6+((PS-1)*480)
680 IF PE=1 THEN ME=2015 ELSE ME
=2015+(PE*480)
690 X=0:Y=0
700 OPEN"O",#-1,FS
710 Y=0:MS=MS+X:X=0:SV$="":FOR L
=MS TO MS+31:X=X+1
720 P=PEEK(L):GOSUB 1000:SV$=SV$
+CHR$(P):NEXT L
730 PRINT#-1,SV$:Y=MS+X:IF Y=<ME
THEN 710 ELSE 740
740 CLOSE#-1
750 GOTO30
1000 IF P>95 THEN P=P-64 ELSE IF
P<=31 THEN P=32
1010 RETURN
```

*Program Listing 1. Bufertext*

RAM still contains most of your buffer. Make sure a tape is loaded and ready to record. Save all of RAM by typing CSAVEM "name," 1536, 16383, 1536, and pressing enter. Change 16383 to 32767 for 32 and 64K machines. Make several copies and put them aside. (At this point, you have the option of shutting off the power and removing the ROM pack.)

Perform a PCLEAR0 by typing POKE 25,6:NEW. This reserves all available RAM for program and buffer use. Load the tape you saved after going off line by typing CLOADM "name" and pressing enter. When you are greeted with Basic's OK prompt, load Bufertext and run it. You'll see the title on your screen. Press any key to continue.

Bufertext works by PEEKing memory locations, checking for ASCII code (line 1000) and POKEing an ASCII value to the screen. The menu at the bottom of the screen lets you continue print (CP) or save (S) part of the buffer. The C command puts the next text page on the screen. You may continue to scroll through memory in this fashion. The text page (TP) value at the bottom indicates the text page you are viewing.

You may print any text that appears on your screen by selecting P at the prompt. Make sure your printer is on or the program will hang up. To save information to tape, give page numbers, corresponding to the TP you wish to save, at the prompts. Bufertext then prompts you for a file name, which must fit Basic standards (e.g., eight characters). When you see the title screen again, Bufertext is done.

That's it! The tape you saved using Bufertext is in ASCII format and you can load it into any other software that supports ASCII input from tape. You can, for example, load this tape into Color Scripts for editing, formatting, printing, and resaving.

You'll find Bufertext useful for PEEKing or printing RAM in ASCII format even if you don't own a copy of Videotex. Most important, using Bufertext with Videotex lets you capture information that some fancy software protocols won't capture. Feel free to modify and improve the program. I'd love to hear about your fixes, ideas, or solutions for using Videotex and Bufertext, or about any other experience you've had telecommunicating with your CoCo. ■

### System Requirements

16K RAM  
Extended Color Basic  
Videotex



# Assembly 101

by Victor and James Perotti

## What's in a Program?

Okay, let's get the big picture. The 6809 CPU can read and process only binary machine code. An assembler is a piece of software that converts (assembles) a text program file into machine code. There are three steps involved with Assembly language:

- writing an Assembly program in an ASCII editor;
- assembling or compiling the text program into binary machine code; and
- running or executing the binary program.

Writing Assembly language will not be like writing Basic; the assembler has a built-in editor that checks the syntax of each line as you enter it. When you are ready to run a Basic program, the syntax errors have all been fixed. With an assembler, there is no error checking in the editor; errors are flagged as the text program is assembled. When you make a mistake programming in any language, the program does not do what you expected. When machine coded or binary programs go astray, however, they usually crash the computer.

Assembler software typically consists of three essential parts:

- the editor in which an Assembly-language program is written;
- the assembler that assembles, or converts, the Assembly-language program into machine code; and
- a debug or monitor program that displays sections of memory, thereby displaying errors for debugging.

### What Is in a Program

When you use a calculator, you must supply data and instructions. When you use a computer, you enter the data and instructions into memory. The CPU must know where to find the instructions and the data;

hence, it must also keep track of the addresses that it uses:

ADDR	CODE	INSTR	
0600	86	LDA	1ST INSTRUCTION
0601	60	#\$60	DATA
0602	B7	STA	2ND INSTRUCTION
0603	04	\$04	ADDRESS IN 2 PARTS
0604	00	00	ADDR = \$0400
0605	3F	SWI	3RD INSTRUCTION

This short example, all in hex, loads accumulator A with the ASCII data for a blank and stores the contents of A at address \$0400 (the top of the screen), and ends. The example is a listing of a program that is already compiled. The assembler has assigned addresses for each byte of code; it has converted the text (e.g., LDA #\$60) into binary numeric representations readable by the CPU. Assemblers that store programs on tape usually locate the binary code at \$600; this program is located at \$600 to \$605. When the programs are stored on disk, the code usually begins at \$E00.

The second column above shows the results of converting the text into binary code; do not be confused by the fact that the binary has been translated into hexadecimal. Everything in the computer is really binary ones and zeros; the hex is only a way to help us poor humans better read the contents of memory. It is much easier for us to process hex 86 than binary 10000110, which is 134 in decimal (I looked it all up).

When the 6809 processes 10000110 at memory location \$600, it understands that it is supposed to load accumulator A (LDA) and move to the next byte in memory, \$601, to find the data to be loaded. Similarly, in \$602 the CPU finds and processes a second instruction: store accumulator A (STA). \$603 and \$604 contain the address at which the contents of A are to be stored. The 6809 takes the two parts of the address, \$04 and \$00, and treats them as a 16-bit address. Finally, the SWI instruction ends the execution of this little program.

### The First Little Program

Now we'll show you how to write a small program in the editor, assemble it, and run it. The program will put a line on the screen, so you can easily tell whether or not the program worked. Again, think of the screen as a block of memory, \$0400 to \$0600. Whatever you store there will be printed on the screen. The Color Computer screen displays 16 lines of text; thinking in hex, the lines begin with \$400, \$420, \$440, \$480, and so on.

Type the following program into the editor. If you are using EDTASM+, omit the first line (START NAM LINE); change END in the last line to SWI; and add a final line, END (typed under the second column).

```
START NAM LINE
INIT LDA #128 *128 IS BLACK
      LDB #32  *COUNTS 32
      LDX #$480 *POINTS TO
                START OF 4TH
                LINE
LOOP STA ,X+ *PUTS BLOCK ON
      DECB   *DECREMENT B
            BY 1
      BNE LOOP *IF B NOT YET
                ZERO, LOOP
DONE END *RESET PC TO
                START OF PGRM
```

### Putting a Black Line on the Screen

This program prints CHR\$(128), a black blob, 32 times, making a black line across the screen. Accumulator A will load and then store the black blob. Accumulator B will be used to count from 32 to zero, so that a full line (32 characters) of blobs will be displayed. The X register will point to the address in screen memory, \$480 or the fourth line down, where the blob will be stored. Therefore, we use LDA #128, LDB #32, and LDX #\$480.

With those registers loaded, the STA ,X+ translates into an instruction to put the blob in A at the address in X (\$480); the plus sign

continued on page 83

### System Requirements

16K RAM  
Color Basic  
Editor/Assembler



# Presenting... instant CoCo's Best Programs of '84

Here they are—29 **HOT CoCo** programs that came through 1984 with flying colors!

**The Best of '84**—29 first class, ready-to-run, Color Computer\* programs from **HOT CoCo**, all on one high-quality cassette, complete with easy-to-read documentation!

It's all here: graphics, utility, and game programs, as well as applications for business, home, and education. The perfect complement to your **instant CoCo** library, and the ideal software package for every Tandy Color Computer user.

And you get the entire **Best of '84** package for just \$16.47—that's 29 programs for less than 60 cents each!

**The Best of '84** honor roll features such outstanding programs as: Stock Transactions Tracker • Variable Cross-Reference • Graphics Builder • Personal Money Manager • Flashcards .

Outstanding variety, top quality. The best programs from an entire year of **HOT CoCo**! It's a package so incredible, we know you'll be delighted.

Become one of the first to own **HOT CoCo's Best of '84** by returning the coupon or attached order card today.

And while you're at it, you can order another class act—**The Best of '83**, still available in limited quantities! (1983 magazines needed for documentation).

For faster service, call **TOLL FREE 1-800-258-5473**. In NH, dial 1-924-9471.

\* Tandy Color Computer is a registered trademark of Radio Shack, a division of Tandy Corp.

☐ **YES!** Send me 29 first class programs on a **Best of '84** cassette for just \$16.47.

( ) I also want a copy of **Best of '83** for \$16.47.

( ) Payment Enclosed ( ) AE ( ) MC ( ) VISA

Card # \_\_\_\_\_ Exp. Date \_\_\_\_\_

Signature \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

instant CoCo • 80 Pine Street • Peterborough, NH 03458

6-85C





# Reader's Forum

## Border Pizzazz

Program Listing 1, Border Pizzazz, prints a moving border for the title pages of your programs. The short, 12-line program uses a fast machine-language routine to perform the task. The machine-language part is written in position-independent code so you can store it anywhere in memory.

Be sure to change the CLEAR statement if you change the starting address. The delay loop in line 70 controls the moving rate of the border. Change this if you want to alter the speed at which the border moves. The DATA statement in line 110 contains the graphics block characters ASCII value used to make the border. Change the first three values (not the BF) to a different hex number and a new style border is printed. Astute watchers will notice an optical illusion is produced. Look closely at the border and see if it appears to change directions. Feel free to use the border in any of your own programs.

Jack Shaffer  
Oakwood, IL

## Better Colors

I was disappointed to discover that when using high-resolution graphics with my F version CoCo, colors that should have been blue came out a frosty green. A look at the color modulator circuit showed that Radio Shack had installed a capacitor, inductor, and 33K resistor from the clock signal to the emitter from the video amplifier transistor, Q3, in an attempt to bypass some clock signal into the video signal.

The circuit was not working well because no signal was being injected into the very-low-impedance emitter of the transistor. The reason that the circuit worked at all was that the junction of the

resistor and inductor was physically close to the base circuitry of the transistor, and the signal was being capacitively coupled into the base. This was critical as to the dress of the components and I couldn't obtain a satisfactory result except when I was holding the parts with my hand.

The circuit was necessary because Motorola chose not to generate any color burst from the VDG in the black-and-white displays. Thus PMODE 4, color set 1 and PMODE 2, color set 1 might have color burst that makes it possible to create predetermined colors with most television sets and composite video monitors.

The junction of R44, R45, and R47 is a convenient place to inject this clock signal, because it is a low-impedance point and the leg of the pot is easy to solder to. (See Fig. 1.) I discarded the capacitor and inductor, because they seemed to serve no useful purpose, and attached the 33K resistor, with its leads cut short, to the clock signal at the post to the left of U6. By running a short length of #26 wire from the 33K resistor to the left leg of the pot, I had a stable circuit, insensitive to lead dress. The 33K resistor just happened to be the right value. Other sets might require slightly more or less, but one should be careful not to inject so much clock that the normal colors are affected.

With this circuit I get bright reds and blues.

Fred B. Tinker  
Beaverton, OR

## Memory Upgrade Trick

If you have ever tried either the 64K upgrade or the inverse-video modification, then you know that you have to mutilate the 74LS02 and 74LS138 or the VDG to achieve them. If you're careful, and lucky, the IC pins bend up and out of the way just fine. Unfortunately, when I made the changes, the pins on the 74LS02 and

```
10 CLEAR200,15000:CLS
20 FORX=15000TO15103
30 READOP$:N=VAL("&H"+OP$)
40 POKEX,N:S=S+N:NEXT
60 PRINT@169,"BORDER PIZZAZZ";:P
RINT@238,"BY";:PRINT@298,"JACK S
HAFFER";
70 EXEC15000:FORX=1TO75:NEXT:GOT
O70
80 DATA 31,8D,00,5F,1F,21,E6,8D,
00,5D,3A,1F,12,8E,04,00,A6,A0,A7
,80,8D,44,8C,04,20,26,F5,8E,04,3
F,A6,A0
90 DATA A7,00,8D,36,30,88,20,8C,
05,FF,26,F2,8E,06,00,A6,A0,A7,82
,8D,25,8C,05,E0,26,F5,8E,05,C0,A
6,A0,A7,00
100 DATA 30,88,E0,8D,14,8C,04,00
,26,F2,A6,8D,00,18,4C,81,04,26,0
1,4F,A7,8D,00,0E,39,81,BF,26,04,
31,8D,00,01,39
110 DATA 9F,AF,CF,BF
120 DATA 00
```

Program Listing 1. Border Pizzazz

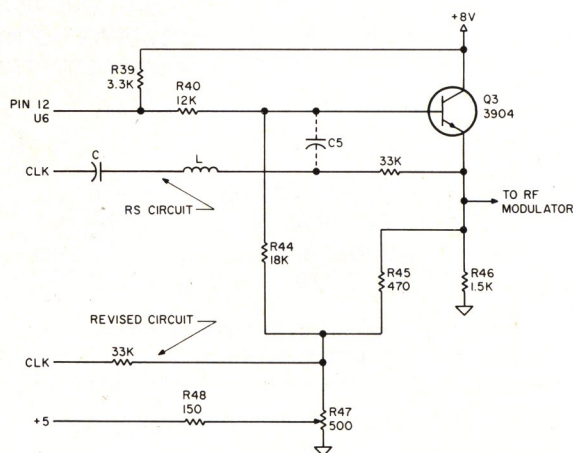


Fig. 1.

Composite Video Amplifier Showing Clock-Injection Revisions



**DYNAMITE+™****"THE CODE BUSTER"**

disassembles any 6809 or 6800  
machine code program into beautiful source

- Learn to program like the experts!
- Adapt existing programs to your needs!
- Convert your 6800 programs to 6809!
- Automatic LABEL generation.
- Allows specifying FCB's, FCC's, FDB's, etc.
- Constants input from DISK or CONSOLE.
- Automatically uses system variable NAMES.
- Output to console, printer, or disk file.
- Available for all popular 6809 operating systems.

FLEX™ \$100 per copy; specify 5" or 8" diskette.

OS-9™ \$150 per copy; specify 5" or 8" diskette.

UniFLEX™ \$300 per copy; 8" diskette only.

For a free sample disassembly that'll convince you DYNAMITE+ is the world's best disassembler, send us your name, address, and the name of your operating system.

**NEW****CoCo  
OS-9  
VERSION****\$59.95**

DISASSEMBLES OS-9, FLEX, DOS FILES

**Order your DYNAMITE+ today!**

See your local DYNAMITE+ dealer, or order directly from CSC at the address below. We accept telephone orders from 10 am to 6 pm, Monday through Friday. Call us at 314-576-5020. Your VISA or MasterCard is welcome. Orders outside North America add \$5 per copy. Please specify diskette size for FLEX or OS-9 versions.

**Computer Systems Center**  
13461 Olive Blvd.  
Chesterfield, MO 63017  
(314) 576-5020



UniFLEX software prices include maintenance  
for the first year.

DYNAMITE+ is a trademark of Computer Systems Center.



FLEX and UniFLEX are trademarks of TSC.  
OS-9 is a trademark of Microware and Motorola.

Dealer inquiries welcome.

**Reader's Forum**

74LS138 snapped off and I had to buy new chips. Here's a way to avoid all that aggravation.

Go to Radio Shack and purchase new low-profile IC sockets for each of the chips that you plan to modify. On the bottom of most of these sockets there are four tabs (one at each corner). Cut them off. Now wherever you had planned on bending a pin on an IC chip, just remove the corresponding pin from its new socket. Next plug the new socket piggyback into the original socket on the board. Solder all your jumpers at the top of the IC pins and then plug the chips back into the stacked sockets. I did this on an E board and there was plenty of clearance when I replaced the RF shield. Check for proper clearance before you try the modifications my way.

Peter D. Ryan  
Dannemora, NY

**Microline 92/CoCo Hookup**

I use an Okidata Microline 92 with my Color Computer, and installed the serial card myself. Here are some tips on the process.

Follow the instructions that come with the card and be sure to check the jumper plug settings on the main control circuit board before mounting the serial card. Jumper plugs SP1 and SP2 should be set to the B side on the main board. Next, the card has 16 switches that you must set properly to select baud rate, parity, bit length, and so on. The switch settings for proper interface with the CoCo are as follows:

Switch	Setting	Switch	Setting
# 1	OFF	# 9	OFF
# 2	ON	# 10	OFF
# 3	OFF	# 11	ON
# 4	OFF	# 12	ON
# 5	ON	# 13	OFF
# 6	OFF	# 14	OFF
# 7	OFF	# 15	OFF
# 8	ON	# 16	OFF

Continuing with the serial card, set the jumper plugs as you did with the main control board. On the serial board there are three jumper plugs to set. Set all of these to the A side since this sends a printer-busy signal to pin #11 on the serial board. Note that the jumper location for side A or side B on the main board is not the same size as the serial board. For example, side A on the main board can be jumpered on the left side, while side A on the serial board will be jumpered on the right side of the pins. Both boards are clearly marked.

Next, set the switches that select character set, page length, and so on. These are located in front of the printer, inside near the control panel. The following settings are standard for the CoCo:

Switch	Setting	Switch	Setting
# 1	OFF	# 5	ON
# 2	ON	# 6	ON
# 3	OFF	# 7	OFF
# 4	ON	# 8	ON

Then carefully make your cable. I suggest a solderless, high-quality connector. On the printer side of the cable you will need a DB25 male with pins 6 and 20 jumpered together. On the CoCo side of the cable you will need an RS-232C connector with pin 1 (carrier detect) dropped.

That leaves three leads to connect to the DB25. First, pin 2 on the RS-232C goes to pin 11. Next, pin 4 goes to pin 3 on the DB25. Finally, pin 3 at the CoCo goes to pin 7 at the printer. The documentation and technical assistance offered by Okidata are excellent if you need further help.

Bobby Ballard  
Brooklyn, NY



continued from page 79

indicates that you want the X register incremented by one, thereby preparing you for storing A in \$481, and so on. You need to repeat this routine 32 times, so you create a loop that stores A at ever increasing X addresses, \$481, \$482, \$483, and so on. The loop is controlled by counting down the B register, from 32 at the start to zero. DECB subtracts 1 from B each time through the loop. The BNE instruction means "branch to loop if B is not equal to zero" (Branch Not Equal). The looping ends when B becomes zero after 32 iterations.

The first and last lines are really directions to the assembler rather than compilable text. START and DONE are labels for single line modules; they have no real function except as locators. NAM is just a way of naming the program within the text. END tells the assembler that it has reached the end of the program.

## Assemble the Program

Now go ahead and assemble the program that you have written in the editor. Here are the instructions to use with three of the more popular editor/assemblers:

### To Assemble a Program

EDTASM +	*A /IM
SDS80-C	@LSM
MACRO 80-C	RUN"ASM

### To Run the Machine Code

EDTASM +	#GINIT
SDS80-C	G
MACRO 80-C	LOAD"1:LINE" :EXEC

If you were lucky, the program ran without any glitches and displayed a black line on your screen. An infinite number of things can go wrong with Assembly-language programs. Did your program scramble the contents of the computer's memory, put red garbage on the screen, and turn on your tape recorder? Maybe something is wrong! Check the syntax of each line, including every # and \$.

## Interpreting a Listing of LINE/BIN

Take a look at Program Listing 1. What is all that stuff? Starting from the column on the left, you have:

- line numbers;
- address where stored;
- hex representation of instruction, data, or address (op code);
- label column;
- instruction or mnemonic representation;
- operand or argument that goes with the instruction; and
- comments for the line.

The second column clearly displays the memory locations for this program; LINE/BIN begins at \$0E00 and ends at \$0E0C. The third column groups the op codes for both the instruction and its operand or argument.

0001	0E00	START	NAM	LINE
0002	0E00 8680	INIT	LDA;	#128
0003	0E02 C620		LDB	#32
0004	0E04 8E0480		LDX	#\$480
0005	0E07 A780	LOOP	STA	,X +
0006	0E09 5A		DECB	
0007	0E0A 26FB		BNE	LOOP
0008	0E0C	DONE	END	
NO ERRORS FOUND				
DONE 0E0C INIT 0E00 LOOP 0E07 START 0E00				

### Program Listing 1. Little Old Line Maker

On line 0002, LDA #128 requires 2 bytes: The op code for LDA is 86, and #128 is \$80 in hex. This compound instruction, in other words, fills \$0E00 and \$0E01. Line 0003 begins with address \$0E02.

The labels function as locators for both the humans and the assembler; hence, BNE LOOP means to branch back to the loop label at \$0E07. At the bottom is the symbol table, a listing of the labels used and the addresses

at which they were located. It, too, tells you that the program loaded at \$0E00 and ended at \$0E0C. ■

Address correspondence to Victor and James Perotti, 163-D Pine Grove Heights, Athens, OH 45701.

## Tell them, "I saw it in HOT CoCo!"

Advertisers play a major role in our presentation of *HOT CoCo* each month. Not only have they invested enormous time and effort into their products, but they literally make the magazine possible each month. Without them there are no magazines like *HOT CoCo* making life with your CoCo more productive. When you order products from our advertisers, please mention us. It lets them know *HOT CoCo* is working for everyone. Tell them, "I saw it in *HOT CoCo*!" Thanks.

## OS-9\* SOFTWARE

**SDISK**—Standard disk driver module. Allows the use of 40 or 80 trk single/double-sided drives with coco OS-9, plus you gain the ability to read/write/format the standard OS-9 disk formats used on other OS-9 systems.—\$29.95

**SDISK + BOOTFIX** — To create BOOTABLE double sided disks.—\$35.95

**Filter Kit #1**—Perform "wild card" directory lists, copies, etc.—\$29.95

**Filter Kit #2**—Macgen and 9 other programs—\$29.95

**Hacker's Kit #1**—Disassembler and memory dump/load utilities—\$24.95

Terms: Prepaid by check, MO, VISA, Mastercard, or COD. Add \$1 S&H, COD add \$3. Send SASE for current catalog.

**D.P. Johnson** 7655 SW Cedarcrest St., Portland, OR 97223  
(503) 244-8152 (we appreciate your calling only 9-11 am PST)

\*OS-9 is a trademark of MICROWARE and MOTOROLA, INC.



# The Learning Page

by Nancy Kipperman

## Meeting the Computer Challenge

**E**ducators are still struggling with the rightful place of the personal computer in the schools. "Computer literacy" is a term that seems to have many degrees of definition.

Are you "computer literate" if you recognize the place of computers in today's society, or if you can turn one on and know where to put the software and how to make it work? Are typing skills a prerequisite? Or must you be able to speak a computer language and write a program? Do you need to know Assembly language? Or is it enough just to have a basic (no pun intended) understanding of what is going on inside the machine?

### Old Arguments

More and more, this question reminds me of old arguments about learning to drive. If I want to use a car to transport myself, isn't it enough that I learn driver education, understand the principles and maintenance of the gasoline engine, and perhaps know how to change a flat tire? I've never felt it necessary to have passed courses in automotive mechanics to be a competent driver. Certainly, it would be an advantage to know how to repair your own automobile, but in today's society, most of us don't have the time. However, if automobile mechanics is where your interest lies, that education is certainly available.

Now, the point I'm making is this: Computers in education are definitely stepping from the mechanics mode into the driver-education mode. More and more teachers look upon computers as tools to be used to achieve new levels of efficiency in teaching students how to handle real-life situations. There is less emphasis on programming and language and more on the use of software.

### New Characteristics

Furthermore, educational software is developing new characteristics. Computer-aided instruction (CAI) was originally touted as the concept that would revolutionize today's education (or perhaps replace the teacher). For that to happen, every student would need constant access to a computer terminal—still a dream in most school systems. More important, every student would have to learn in the precise way in which a computer instructs.

Any competent teacher knows that one approach to teaching a concept to a group won't be effective with every student in that

group. Each person has an individual learning style—a combination of visual and audio requirements necessary for learning.

After I introduce a new concept in a class, I can tell quickly by watching the students' faces and responses who has understood the material and who is lost. I, as the teacher, can then restructure my approach. The computer is, unfortunately, stuck with its program and unable to sense nuances in the students' understanding or reassess its attack.

### Drill and Practice

Drill and practice is an area in which much software has been developed. In theory, it works well. A student immediately knows whether a response is right or wrong after completing each problem. No longer is there the frustration of copying 20 sentences or math examples, doing all the work, and then discovering that none of the answers is correct. Instant feedback with a positive note certainly should be an incentive to the student. In actuality, however, drill and practice is still drill and practice. It might be more fun and have a game format on a computer, but it's not an innovative method.

According to Ann Lathrop, editor of *The Digest of Software Reviews: Education*, "We are seeing a continuing decrease in number of reviews of the type of drill-and-practice programs frequently thought of as traditional CAI. The most frequently reviewed programs (in the 1984 edition) are those that encourage students to use computers as tools, are new simulations, and are programs that will help students develop better problem-solving and logical thinking skills."

### Simulation Software

Simulation software can be simple or complex, but it requires the student to become involved. It teaches strategies, problem solving, team work, critical thinking, and logic by setting up a problem situation that must be solved. The Factory from Sunburst is a relatively simple simulation program that challenges you to make a variety of products using three different machines to modify a block of wood. You can choose to play against the computer to try to match the steps necessary to attain the computer's finished product, or you can play against another person.

Much more complex simulations are available for a variety of computers. Think how

much safer it is to mix chemicals in a trial-and-error method on a computer screen than in an actual laboratory. In a computer simulation, results of certain actions can be shown to students, that's much more effective than telling them.

A college junior accounting major recently commented to me, "Learning to use a computer filing system and doing actual problems on computer spreadsheets instead of learning programming seems to have more value in my future and more relevance in my present curriculum." Colleges and universities are already heeding such comments; I predict that courses using the computer as a tool will crop up with increasing frequency on all levels.

### Management Tasks

Software will also play an important part in the management of teachers' tasks in the classroom. You can efficiently keep grade reports, progress charts, and competency results on a computer tape or disk. Dr. Leigh Howard Holmes of the English Department at Cameron University, Lawton, OK, explains Follow 2, his theme commentary program, in the February 1985 issue of *The Computing Teacher*. It's a program that makes thorough comments on common mistakes on students' themes and produces a printout for them. The program is on cassette for a 64K Color Computer, and Holmes claims it reduces his grading time by at least 20 percent.

### Looking Ahead

What's ahead for our children (and ourselves) in the quest for "computer literacy?" As far as educational software is concerned, I think it's programs that deal with issues that are important to students and that have real-life applications. It is programs that offer students something more than a teacher can provide in the everyday classroom. It is programs that have enough flexibility that students will not tire of them or use all the options too quickly. It is programs that use the computer as a tool to help students deal with the life-long process called education. ■

Nancy Kipperman is HOT CoCo's Education Editor and an English teacher at Conant High School in Jaffrey, NH. Write her c/o HOT CoCo, 80 Pine St., Peterborough, NH 03458.



AVAILABLE  
NOW FOR

IBM PC Jr.

# For Your TRS-80 Color Computer

Apple • Atari • Commodore • TRS 80 I, III, 4 & Color

## DORSETT EDUCATIONAL SOFTWARE PASSES THE COST- EFFICIENCY TEST!

For computer assisted instruction, our software more than passes the test...it EXCELS! With **over 1000 educational programs\*** designed specifically to concentrate learning for all users, from kindergarten level to advanced individual studies, from slow learners to exceptionally bright students, you'll get positive results with our quality, economically-priced courseware.

\* 500 Programs Available for TRS 80 Color; 400 for IBM PC Jr.

DORSETT  
Classroom A  
Room #1

Excellent  
Work!

A+

PROGRAMS OFFER

OTHER BRANDS

1. FULL TIME AUDIO NARRATION
2. SYNTHESIZED, ROBOTIC VOICE
3. MULTIPLE CHOICE QUESTIONS
4. CLEAR GRAPHICS
5. NUMBER OF COURSES
6. VARIETY OF PROGRAMS
7. SELF-PACED PROGRAMS
8. PROGRAM LENGTH
9. COMPATIBILITY
10. YEARS IN EDUCATION
11. PRICE PER PROGRAM

	DORSETT	A	B	C	D
1. FULL TIME AUDIO NARRATION	Blue				Red
2. SYNTHESIZED, ROBOTIC VOICE		Red			
3. MULTIPLE CHOICE QUESTIONS	Blue		Yellow		
4. CLEAR GRAPHICS	Blue			Green	
5. NUMBER OF COURSES			Yellow		
6. VARIETY OF PROGRAMS	Blue				Red
7. SELF-PACED PROGRAMS	Blue			Green	
8. PROGRAM LENGTH		Red			
9. COMPATIBILITY	Blue		Yellow		
10. YEARS IN EDUCATION	Blue				
11. PRICE PER PROGRAM	\$3.75*	\$4.95*	\$9.95*	\$29.95*	\$32.50*

DORSETT COURSEWARE IS COMPATIBLE WITH  
IBM PC Jr., TRS 80, I, III, 4 & COLOR, APPLE, ATARI  
& COMMODORE COMPUTERS.  
\*PRICE PER PROGRAM IN A 16-PROGRAM SERIES.

You may be able to  
reduce your taxes by



- income averaging
- income splitting
- tax shelter

Which?

1 sister

2 smaller

One-syllable adjectives that  
end in **y** usually just add **ly**.



Which has one syllable?

1 icy

2 sly

## Interactive Tutorial Programs

Over 1000 Programs with Full Time Audio Narration, Pictures & Text!

**We're Your Educational  
Software Source for Grades  
K-12 and Advanced Studies**

Course	No. of Programs
Reading	256
Mathematics	128
Comprehension	48
History	32
Algebra	16
Spelling	16
Government	16

**16 Programs in each of the following:**

Children's Tales - Carpentry - Electronics - Health  
Services - Office Skills - Statistics - First  
Aid/Safety - Economics - Business - Accounting  
- Psychology - AND MANY MORE!

Dealer Inquiries Welcome

For your Atari 400/600/800/1200, you will need the Atari Cassette Recorder and the Dorsett 4001 Educational Master Cartridge, \$99.95. For your Apple II, you will need the Dorsett M402 T/T plug-in-board and M401 stereo cassette player, \$99.00. All programs listed are available for TRS-80, I, III, IV, which require the M203 speaker converter and the 401 stereo cassette player, \$99.00. For the PC Jr., a cassette adapter cable and a good cassette recorder is required. A Radio Shack CCR-81 or CCR-82 is recommended. For your Commodore 64, you will need the Dorsett conversion kit T/T plug-in-board and a stereo cassette, \$99.00. \$59.90 for an album containing a 16-program course (8 cassettes with 2 programs each at \$3.75 per program). \$8.00 for a 2-program cassette.

Send for a catalog of over 1000 programs for Atari, TRS 80, Apple, IBM PC Jr., Commodore, etc.

For more information, or to order call:

**TOLL FREE 1-800-654-3871**

IN OKLAHOMA CALL (405) 288-2301



**DORSETT**  
Educational Systems, Inc.  
Box 1226, Norman, OK 73070





# Radio Shack Has Want for Your


## Save Time and Effort at Home

**Color File.\*\*** An easy-to-use home filing system to alphabetize, select, examine, revise and store household records. Comes pre-set with seven files—or create your own. #26-3103




**24<sup>95</sup>**

**Spectaculator®.** Do home planning and budgeting with this electronic spreadsheet. Just enter numbers and formulas—results are displayed on command. Ideal for home financial forecasting. #26-3104



**34<sup>95</sup>**

**Color SCRIPSIT®.** A powerful home word processing system for correction-free letters. Text can be saved on optional cassette recorder or printed with optional printer. #26-3105




**34<sup>95</sup>**

**Personal Finance II.** Includes 26 expense categories, including auto, gas, food and more. Review spending on year-to-date or category basis. #26-3106



**34<sup>95</sup>**

**COLORSTAT.\*\*** Use your Color Computer to turn complicated home or business data into statistics for easy analysis, or print them on an optional printer for your records. #26-3107



**24<sup>95</sup>**

\*Joysticks required.  
\*\*Cassette recorder required.  
\*\*\*Joysticks and recorder required.

## Educational Software from Walt Disney

Your Choice

**34<sup>95</sup>**  
Each


**Telling Time with Donald.\*\***

Teaching your children to tell time is easy with a little help from Donald Duck. For ages 5-8. #26-2530



**Mickey's World of Writing.\*\***

An exciting way to build important writing skills! Youngsters learn the basics of sentence structure and fundamental writing skills with Mickey Mouse. For ages 8-11. #26-2532



**Mickey's Alpine Adventure.\*\***


A frosty exploration of spelling and reading concepts. Learn important spelling rules and the sounds of vowels and consonants with Mickey Mouse and Donald Duck. #26-2534



**Space Probe: Math.\*\*** An exciting interstellar study of mathematical word problems. Youngsters learn the concepts of area and perimeter during outer space adventure. For ages 7-14. #26-2537




**Downland.\*** You're alone in a secret cave, traveling from chamber to chamber collecting keys, gold and diamonds. But can you jump, climb and run to safety? #26-3046



**24<sup>95</sup>**

**Canyon Climber.\*** Your climbing skills are under test when you find kicking goats, falling rocks, zinging arrows and more on your way to the summit. #26-3089



**34<sup>95</sup>**






# the Software You Color Computer

## Learning Programs from Spinnaker


Your Choice

**2995**  
Each

**Facemaker.** An exciting game to help your kids learn computer basics while they create an animated face. #26-3166




**Kids on Keys.** Your kids will enjoy learning with the computer as they identify numbers, letters and words. It's fun and your kids will learn important math and spelling skills. #26-3167



**Kindercomp.** Introduce your children to computer graphics! Even the youngest in your family will enjoy creating vivid color pictures and exciting sound effects by pressing a few keys. #26-3168




**Fraction Fever.** An exciting math contest! Your kids will develop a real understanding of fractional relationships as they guide their graphic "pogo stick" through this colorful game. #26-3169



### Dungeons of Daggorath.

You're pitted against a succession of awesome beasts in the fearful dungeon. Each victory brings you closer to your ultimate foe—the wizard. #26-3093



**2995**

### Baseball.\* This exciting game

plays just like the big leagues! You are the coach—it's up to you to control the pitching, defense, and running for extra excitement. #26-3095



**2495**

## More Learning Fun for Your Kids

### Vocabulary Tutor 1.\*\*

Give your children a head start in school. Start building their vocabulary at home with an exciting word and description matching game they'll love to play. For grades 3-5. #26-2568



**895**

### Vocabulary Tutor 2.\*\* More


practice matching words and definitions and placing words in appropriate sentences. Great for helping young students get ahead. For grades 3-5. #26-2569



**895**

### Color Math.\*\* Make learning fun.

Supplement your children's study with problems in addition and subtraction. For ages 6-14. #26-3201



**1995**

Circle Reader Service card #4


**Radio Shack®**  
**The Technology Store™**  
A DIVISION OF TANDY CORPORATION

Find out more about  
Radio Shack's Color Computer.  
Send for a free catalog.

Mail To: Radio Shack, Dept. 85-A-974  
300 One Tandy Center  
Fort Worth, Texas 76102

Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Telephone \_\_\_\_\_

Prices apply at Radio Shack Computer Centers and at participating Radio Shack stores and dealers. Disney, Mickey Mouse and Donald Duck are registered trademarks of Walt Disney Productions. Facemaker, Kids on Keys, Kindercomp, Fraction Fever and Spinnaker are registered trademarks of Spinnaker, Inc.

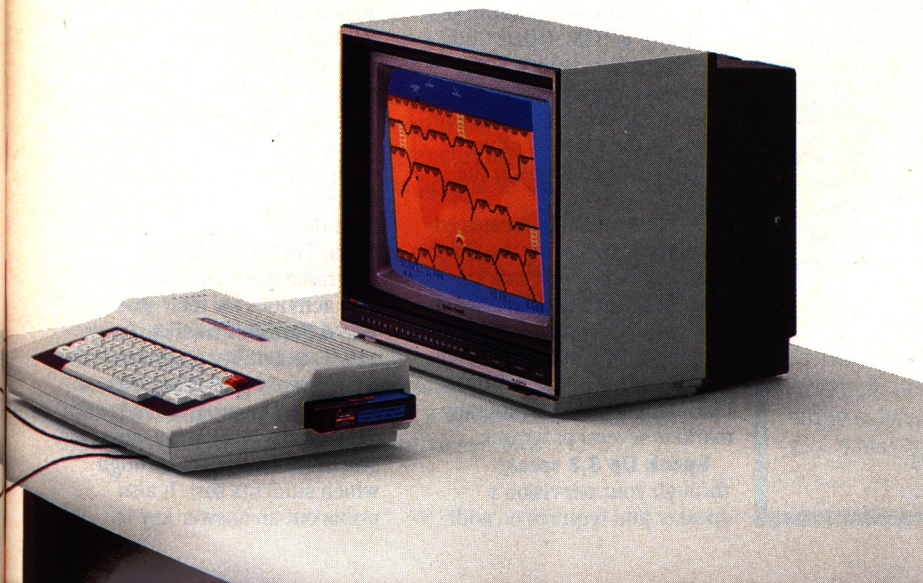



# Product News

by J. Scot Finnie

## Child's Play, Dr. Words, Eagle, The Adventure Builder, ChessD, The Dallas Quest, Simon, Goldkeys, and More

Information printed in the Product News section is supplied by manufacturers. HOT CoCo has not tested or reviewed the products discussed here and cannot guarantee manufacturers' claims.

**A**lthough many of us are not yet fully aware of it, the Color Computer has a big following among kids, students of all ages, and educators. Tandy recently held a conference in Fort Worth, TX, for many of the Color Computer's educational-software vendors to

explore the future of the education market. The results were positive. Almost every month, HOT CoCo hears of new educational products in the making. The first part of the column this month touches on some we've heard about lately.

### CoCo Educating

TCE programs is an educational software company on the edge of a breakthrough. Its new program series **Child's Play** was developed to take up the slack in the junior- and senior-high-school markets where educators have begun to suspect that real-world applications,

such as word-processing, spreadsheet calculating, and database management, are the ultimate goals of teaching computer familiarity in the schools.

Child's Play is a series of programs that perform business functions. **Child Writer** and **Memo Writer**, for example, are companion word processors. Child Writer uses on-screen menus and mouse technology. It has easy-to-use features for young users. As students learn and progress with Child Writer, they are preparing themselves for Memo Writer, which has several additional features. Both word processors require 32K, a disk drive, and a mouse or joystick. Child Writer sells for \$44.95. Memo Writer sells for \$49.95.

TCE has an upgrade policy that allows you to trade in your TCE software. You can send in your old software, the difference in price between the programs, and \$7.50 to trade up to more expensive programs. Ted Malaska, one of TCE's team of teachers and software developers, stresses that the company also offers the **Network II Child Writer**. This program has the same features as Child Writer, but it can be networked. It sells for \$59.95. Other Child's Play programs include **List Manager**, **Proofreader**, and **Master Proofreader**. The company also has several other Child's Play programs in the works.

Educational Micro creates educational software for the Color Computer and Apple markets. Their programs are designed to teach preschool through adult students how to spell, read, think logically, and perform math functions. The company markets several programs.

**Speak Up 3.3** speaks through your television's speaker and requires no addi-

tional software. It comes in versions for 16K or 32/64K Color Computers and sells for \$29.95 on cassette. **Dr. Words** and **Dr. Stan** use game formats to teach children and adults how to spell. They require 16K and sell for \$47.95 on cassette and \$49.95 on disk. **Harold's Castle** is a text-adventure game that helps teach reading comprehension and logical thinking for ages 10 and up. It is an educational program that can be used by the entire family. Harold's Castle requires 32K and sells for \$22.95 on cassette and \$24.95 on disk. Contact Educational Micro for more information.

Summer is just around the corner. For kids all over that means weeks of fun, exercise, and learning at summer camps are not far off. The American Camping Association (ACA) publishes an annual reference book for summer camps to help parents make the right decision in seeking out a summer camp for their children. The 1985 **Parent's Guide to Accredited Camps** has up-to-date information on more than 2,200 camps, including many computer camps. You can order it by sending a check or money order, calling the toll-free order line, or picking it up at the ACA office in your area. **Parent's Guide to Accredited Camps** sells for \$8.95.

Creative Technical Consultants offers a host of educational computer programs that teach students of all ages everything from the alphabet to string variables. The company also sells programs that help teachers design activities for their students. **Word Search Puzzles**, for example, is a utility program that creates word-search puzzles on a printer. The program hides up to 40 words in an array with other random letters through which students sort. It also prints out an answer key to

## Pick of the Month

The first question on our Reader Service card to the right asks you to pick your favorite article or feature in this issue. Write the appropriate letter in the space provided on the card. Here is the list to choose from:

- A. Doctor ASCII, Esposito and Ramhoff, p. 18
- B. Mindbusters, Ramella, p. 22
- C. The Computer Room, Norman, p. 24
- D. In Search of 128K, Norman, p. 30
- E. 64K Modification Revisited, Esposito and Rowe, p. 40
- F. Missile Defense, McDowell and Diehl, p. 44
- G. The 80K Color Computer, Grace, p. 57
- H. Pie In The Sky, Riegel, p. 59
- I. Investment Analysis, Chakravarty, p. 62
- J. Fabulous Fonts, Stoloff, p. 66
- K. How Your CoCo Adds Up, Tipps, p. 70
- L. 6809 On Line, Ballard, p. 78
- M. Assembly 101, Perotti and Perotti, p. 79
- N. The Learning Page, Kipperman, p. 84
- O. Product News, Finnie, p. 88
- P. CoCo For Hire, Kepner and Tiernan, p. 91



# Index to Advertisers

Reader Service No.	Page No.	Reader Service No.	Page No.	Reader Service No.	Page No.
335	Cer-Comp . . . . . 27	25	Four Star Software . . . . . 65	222	Professor Jones . . . . . 26
121	Cognitec . . . . . 17	455	Hard Drive Specialists . . . . . 53	<b>51</b>	<b>PXE Computing . . . . . 7</b>
*	Colorware . . . . . 93, 94, 95	440	HJL Products . . . . . CIV	4	Radio Shack
<b>11</b>	<b>The Computer</b>	8	HJL Products . . . . . 21		. . . . . CII, 1, 11, 86, 87
	<b>Center . . . . . 68</b>	*	HOT CoCo	55	Real-Time Specialists . . . . . 32
18	Computer Plus . . . . . CIII, 43		Corporate Ad . . . . . 33	70	Saguaro Software . . . . . 36
506	Computer Systems		Foreign Dealer . . . . . 92	160	Saguaro Software . . . . . 15
	Center . . . . . 61		HOT CoCo Subscriptions . . . . . 9	*	<b>Smith-Corona . . . . . 19</b>
507	Computer Systems		Instant CoCo . . . . . 64	212	Softlaw . . . . . 2, 3
	Center . . . . . 82		Instant CoCo Best of '84 . . . . . 80	*	Software Support . . . . . 25
223	Computer Systems		Toll Free # . . . . . 39, 69	299	Spectral Associates . . . . . 39
	Consultants . . . . . 39		University Micros . . . . . 13	299	Sunlock Systems . . . . . 65
75	CoCo Devices . . . . . 76	91	Incentive Software . . . . . 74	236	T & D Subscription . . . . . 76
536	Cybertron . . . . . 92	*	Mark Data Products . . . . . 37	386	TCE Programs . . . . . 38, 69
243	Deft Systems . . . . . 4	196	Micro Works . . . . . 23	131	THINC Tech Hardware . . . . . 92
397	Delker Electronics . . . . . 56	337	Nibble Notch Computer	93	True Data Products . . . . . 28, 29
209	Dorsett Educational		Products . . . . . 69	<b>30</b>	<b>VMC . . . . . 92</b>
	Systems . . . . . 85	<b>200</b>	<b>Osicom . . . . . 11</b>	175	White House Computer . . . . . 77
*	D.P. Johnson . . . . . 83	214	PBJ, Inc. . . . . 14, 75		
216	E.A.P. . . . . 20	124	Perry Computers . . . . . 60		

Advertising Offices: (603) 924-7138 or (800) 441-4403

The advertisers listed in bold print are new advertisers to HOT CoCo this issue.

\*This advertiser prefers to be contacted directly. For further information from our advertisers, please use the reader service card.


## Coming Next Month

**H**ablas Pascal, C, Logo? Just as humans communicate in many different languages, your CoCo is capable of dialects other than Basic, too. And the **OS-9** operating system promises to make it easier than ever to use those programming languages.

In July, we'll provide overviews on the **Pascal, C**, and **Logo** programming languages. All three are gaining in popularity—Pascal and Logo in the classroom, and C in applications programming. Can they be better than Basic? Read next month's *HOT CoCo* to find out.

If you organize data on your CoCo, you know that sorting is very important in manipulating that data. Next month, **David Meredith** explores several different sorting methods in "**All Sorts Of Sorts**". You can use his routines in your own programs, or use his advice in choosing your next database manager.

Like the feel of a soldering iron? **Jim Barbarello** returns in July with a new series. "**The John-B System**" is an interfacing project with an important angle. It can be used as a person-assistance system for disabled individuals, allowing them to control lights and electric appliances, compose text, or dial a phone. You can also adapt it for a home-security/control system.

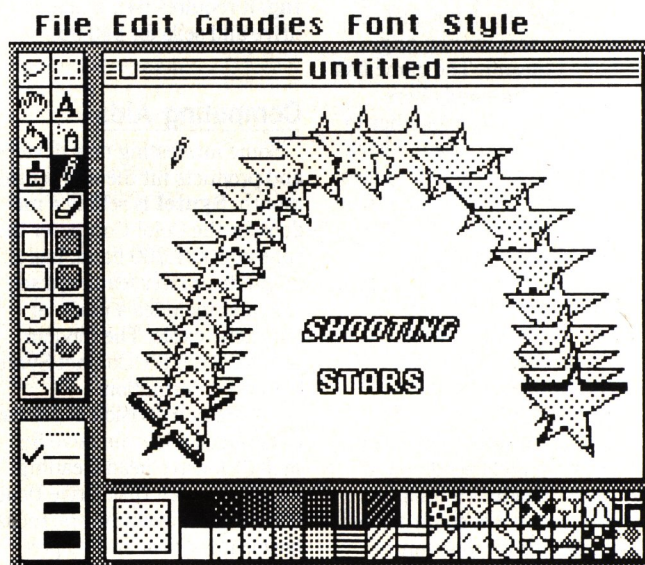

CoCo Max, Colorware's Macintosh emulator device, is turning heads. Does it live up to its hoopla? See for yourself next month as **Scott Norman** gives you his impressions and side-by-side screen-dump comparisons of CoCo Max and Macintosh displays. ■



make grading easy. Word Search Puzzles requires 16K and Extended Color Basic. It sells for \$10.95.

Creative Technical Consultants has also come up with a new way to demonstrate its programs to educators. The company will send a video-tape catalog of its programs for a 30-day evaluation to teachers and school officials who send a request for one on school letterhead. Contact the company for more information.

## Games and Diversions

**CoCo Max** was the apple in the eye of several onlookers and buyers at the Rainbowfest in Irvine, CA, earlier this year. The graphics package from Colorware appears to be all its advertisements crack it up to be. Look for a conclusive review of CoCo Max in next month's issue of *HOT CoCo*. CoCo Max requires 64K, and a joystick, mouse, or graphics tablet. The package sells for \$69.95.

Who shot J.R.? **The Dallas Quest** is a graphic-adventure game Radio Shack has just released that was written originally by Datasoft. The game has moving graphics and offers clues that you piece together to find a lost oil field. Radio Shack has released several new games in recent weeks. Two of these on Radio Shack store racks right now are **Desert Rider** and **FlightSim I**. The Dallas Quest requires 64K and sells for \$29.95. Desert Rider requires 32K and sells for \$29.95. FlightSim I requires 32K and sells for \$24.95.

Saguaro Software has a new program that will send you to the Moon. **Eagle** is a lunar orbiter and lander whose thrusters and craft altitude you control with joysticks. The program displays horizontal and vertical velocities, acceleration values, vertical and horizontal distances from target, and fuel consumption on the screen. In the advanced levels, you'll encounter problems that cause dangerous approaches. Eagle requires 32K and two joysticks. It sells for

\$24.95 on cassette and \$29.95 on disk. Contact Saguaro for more information.

Bill Cook, author of The Adventure Generator plans to release a new version of the program called **The Adventure Builder**. It will offer several improvements over its predecessor, including multiple sessions, the ability to reedit creations, scroll-protected split-screen outputs, and the capacity to create adventures that use more memory. The source for The Adventure Builder is Island Software. The program comes on disk and sells for \$39.95 plus \$3 for shipping. Write the company for more information.

Computer Systems Distributors has released **ChessD**, a challenging high-resolution chess game that offers special moves, including castle, en passant, and pawn promote. It also has a built-in tournament timer, a 32,000-move disk-opening book, and several other features. ChessD is manufactured by the same company that sells **SDOS**, **SD Basic Compiler**, and **SEdit/Type: Word Processing**. It requires 64K and a disk drive and sells for \$49.95.

## Computing Aids

Some interesting new devices and products hit the market this month. **Syntel** is selling a modem for the Color Computer that runs at 300/1,200 baud, has an originate-answer feature, a self test, and includes a modular telephone cable. The modem sells for \$129.95. Contact Syntel for more information.

The Scotch division of 3M has announced a low-abrasive 5¼-inch disk-drive head-cleaning kit. The Scotch Disk Drive Head Cleaning Kit contains one reusable cleaning disk and 10 pre-measured packets of Scotch cleaning solution. It sells for \$11.99.

**Plugging In: The Microcomputerist's Guide to Telecommunications** is a new guide to the world of electronic communications. Author Sasha Lewis has created a reference work designed to help with the selection

of hardware, software, and information services. **Plugging In** provides on-line examples of many private and public services, including CompuServe, The Source, and Dialog's Knowledge Index. The book sells for \$11.95 in bookstores and is also available directly from the Chilton Book Company for an additional \$1.75 for shipping.

## Ones to Watch

Simon says, "Go ahead, make my day." **Simon** remembers every move you make on your keyboard in a Basic program. When you are through, Simon lets you store your keystrokes on disk. The next time you want to perform that routine, Simon

can load in the keystrokes and do it for you. And Simon can remember as many as 6,000 keystrokes. Simon is produced by Derringer Software, makers of **Pro-Color-File** and many other programs for the Color Computer. It costs \$24.95 plus \$3 for shipping.

Vidtron, which created **Editron**, has a new keyboard enhancer called **Goldkeys**. The software-based enhancer adds a type-ahead feature, 10 user-defined functions, and 10 predefined functions to your computer, among several other features. Goldkeys requires 64K and Extended Color Basic. It comes on cassette for \$20 and disk for \$22 plus \$2 for shipping. ■

## List of Manufacturers

Chilton Book Company  
Radnor, PA 19089  
800-345-1214  
Reader Service ✓ 555

Colorware Inc.  
78-03B Jamaica Ave.  
Woodhaven, NY 11421  
718-647-2864  
Reader Service ✓ 556

Computer Systems Distributors  
P.O. Box 9769  
Anaheim, CA 92802  
714-772-1390  
Reader Service ✓ 557

Creative Technical Consultants  
16-8 Sangre de Cristo  
P.O. Box 652  
Cedar Crest, NM 87008  
Reader Service ✓ 558

Derringer Software Inc.  
P.O. Box 5300  
Florence, SC 29502-5300  
803-665-5676  
Reader Service ✓ 559

Educational Micro Inc.  
1926 Hollywood Blvd.  
Suite A620  
Hollywood, FL 33020-4524  
305-920-2222, ext. 620  
Reader Service ✓ 560

Island Software  
P.O. Box 1402  
Oak Harbor, WA 98277  
Reader Service ✓ 562

Saguaro Software  
7331 East Beverly Drive  
Tucson, AZ 85710  
602-623-3321  
Reader Service ✓ 563

Scotch  
3M Center  
St. Paul, MN 55144  
612-733-1110  
Reader Service ✓ 564

Syntel  
530 Plyon Drive  
Raleigh, NC 27606  
919-828-4626  
Reader Service ✓ 565

Tandy Corp.  
1400 One Tandy Center  
Fort Worth, TX 76102  
Reader Service ✓ 566

TCE Programs Inc.  
P.O. Box 2477  
Gaithersburg, MD 20879  
301-963-3848  
Reader Service ✓ 567

Vidtron  
4418 East Chapman Ave.  
Suite 284  
Orange, CA 92669  
714-639-4070  
Reader Service ✓ 568



# CoCo for Hire

by Terry Kepner and Linda Tiernan

## Statistical Data Compilation—Part II

Last month we began a discussion of statistical data-compilation services and how to start one, which is not as hard as it might sound. This month we conclude our look at this kind of work-at-home business with instructions for running one.

### Tools of the Trade

Data-compilation businesses don't require a great deal in the way of hardware. A Color Computer and a printer are a good start. And either cassette- or disk-based systems will work. Your CoCo's memory should be 32 or 64K, preferably the latter. You can compile small surveys of a hundred or so responses in 16K (not including the memory required by your spreadsheet program), but for anything complex you need a larger memory capacity.

The disadvantage of cassette-based systems is that the software available for them often has fewer features. Some disk-based software lets you refer to data in spreadsheets stored on disk, allowing you to concatenate spreadsheets into a larger-than-memory whole. This is useful for projects with thousands of questionnaire responses.

You might want to consider the advantage of using OS-9 if you have a disk system. OS-9 gives you a larger selection of software with many helpful features, including the ability to print columns across several pages, which lets you tape sheets together for wide spreadsheets. Another desirable feature is access to printer codes. You might want to enable compressed printer fonts or special control features. It's also handy to be able to alter paper margins and vary the spreadsheet's column width for printing.

Look for the following spreadsheet features: the ability to insert and delete extra columns and rows within a working format, count the number of cells in a column or row that contains data, and find a minimum or maximum amount in a range of cells. Other

features to consider include percentage calculation (often possible by combining other commands), summing and averaging, and graphing capabilities—particularly those that work with a printer.

Of prime importance for this application is a large number of columns and rows or the ability to refer to other spreadsheets for data—but these are hard to find. You will probably be using several spreadsheets for one analysis with a summary spreadsheet that takes all the subtotals and gives the final statistics.

### Setting Up a Project

Begin a project by meeting with your clients. Try to be in on the planning session of a survey. You have a better idea of equipment limitations than your clients do and they know what questions they want answered. Bear in mind that the more objective the questions are, the easier the answers will be for you to compile.

There will be an interval of time between the completion of the final drafts of the questionnaire and the point when the responses are ready for compilation that does not involve you. Recommend a specific return date for the survey. That means saying August 15 instead of "90 days from the receipt of this form. . . ."

When you have the finished questionnaires in hand, examine the responses for each question to see how well the multiple-choice answers worked. For example, did many people write in their own response, such as "never heard of it," to any of the questions? If so, you might want to add that response as a category on your spreadsheet. Whenever responses indicate possible revisions to your format, check with your clients to be sure you are providing what they want.

Once you have reviewed the questionnaires and your format to be sure that they are consistent, start typing in the data. This

is tedious, but you'll soon get into a rhythm. When you reach the end of the pile, start the calculations. Use the spreadsheet to sum each column, count the number of respondents, figure percentages and totals, and put all these figures in the appropriate places at the bottom, top, or sides of the spreadsheet. When this is done, print out the form and inspect the data and formulas. You might find errors on paper that you missed on the screen, such as a slash instead of a one or a summation that starts a few cells too low or continues a few cells too far.


It is important that your spreadsheet equations are correct and that you have properly transcribed all the questionnaire data. Errors are unacceptable because they might alter the conclusion of an analysis. Someone's job or a corporation's budget could be ruined by a simple error of omission.

### Policy

It is important to maintain discretion with a statistical data-compilation business. Data you receive from your customers often represent information collected in confidence. Never mention previous or current clients (without written consent) or reveal any of their data, even to prospective customers. Some clients might ask you to sign a nondisclosure agreement or a confidentiality paper. Most states don't consider these legally binding, but it is the gesture that matters. For a highly confidential job, a long-term position, or one involving large amounts of money, your client might ask that you be bonded, a form of insurance that guarantees your reliability and integrity. If your prospective client foots the bill for bonding, you should accept it. Being bonded will open the door to other similar and possibly lucrative jobs.

Part of maintaining confidentiality is turning over to clients all materials that contain their data, including disks and cassettes. An-



**ATM-80**DATA ACQUISITION & CONTROL SYSTEM  
FOR THE COLOR COMPUTER

## APPLICATIONS:

- ENERGY MANAGEMENT • PROCESS CONTROL • SCIENTIFIC EXPERIMENTS • ROBOTICS • TECHNICAL EDUCATION
- SECURITY SYSTEMS

## FEATURES:

- 20us 8-BIT A-TO-D CONVERTER • 32-CHANNEL ANALOG MULTIPLEXER • PROGRAMMABLE GAIN AMPLIFIER • PEAK DETECTOR AMPLIFIER • 8-BIT D-TO-A CONVERTER • 4-BIT I/O PORT (PROGRAMMABLE) • 2K RAM • CONTROL SOFTWARE IN ROM • USER'S MANUAL

ASSEMBLED & TESTED ..... \$184.95  
MANUAL ..... \$ 15.00

**CLOCK/CAL/MEM CARTRIDGE**

## FEATURES:

- COUNTS HOURS, MIN., SEC. MONTH, DATE, DAY OF WEEK, YEAR, LEAP YEAR • PROGRAMMABLE INTERRUPT TIMER (5, 5.0 AND 60 SECOND INTERVALS) • ROM BASED CONTROL SOFTWARE • 8K RAM SPACE • CLOCK BACKUP BATTERY

ASSEMBLED & TESTED ..... \$ 89.95  
W/8K RAM ..... \$119.95

For more information, call or write to:

CYBERTRON TECHNOLOGY  
3131 TIMMONS #723  
HOUSTON, TEXAS 77027  
(713) 840-1272

**CONVERT YOUR ANALOG  
WORLD TO DIGITAL**ANALOG TO DIGITAL  
CONVERTERS FOR COLOR  
1 OR 2 COMPUTERS**- CCAD-B -**

## FEATURES:

- MENU DRIVEN SOFTWARE
- 12 BIT RESOLUTION
- 16 INPUT CHANNELS
- ON-BOARD USER AMPLIFIERS
- 3 TTL ALARM LINES
- DISK OR TAPE SOFTWARE INCLUDED

## ORDER:

CCAD-B & DISKETTE ..... \$199.00  
CCAD-B & TAPE ..... \$190.00

**- AD-8 -**

## FEATURES:

- 8 BIT RESOLUTION
- 8 INPUT CHANNELS
- OPTIONAL MENU DRIVEN SOFTWARE

## ORDER:

AD-8 HARDWARE ..... \$69.95  
AD-8 TAPE ..... 7.95  
AD-8 DISKETTE ..... 9.95

**THINC** **TECHNICAL HARDWARE, INC.**

P.O. BOX 3609  
FULLERTON, CA 92634

**CoCo for Hire**

other option for magnetic media is bulk erasing, which requires a relatively inexpensive tool called a bulk eraser that is designed to wipe your disks and cassettes clean of data. If you give your data-storage materials to your clients, you might want to consider using an encoding program to prevent anyone else from using the data and spreadsheet templates you develop. This also ensures that your clients will return to you if they want to reexamine the data.

Billing is another area of a statistical compilation service for which you must set and strictly adhere to a policy. Be stern with yourself and your clients. If you charge for an hour, be sure that you have done an hour's work. Itemize your bills: Show your customers that you worked for x amount of hours analyzing format, y amount of hours setting up format, z amount of hours inputting data, w amount of hours printing, and so on. This detail gives your customers a clear understanding of the service you provide for their money.

Remember not to step out of your role as an intermediary. Most people dislike statistical work. If you offer to do too much of the groundwork, you might find yourself in charge of the project. If a customer wonders why you can't add three more questions to a questionnaire that has already been printed, spell out the reason or find a way to add the questions for an extra charge. Don't waste time on side issues and extra work. The biggest pitfall in statistical compilation is taking on more than you can manage. For a survey, put in a bid for making all the questions objective with multiple-choice answers. Advise your clients to leave one question or section where respondents can address things the questionnaire neglects.

When you compile a survey, do the sums, averages, displays, and whatever else your customer asks for, but don't write a summary paragraph or conclusion. The wording of the conclusion of a statistical analysis often determines its interpretation. Your clients will want to do this themselves. But it is important at the outset for you to know what your clients are looking for so that you don't spend several hours working on insignificant side issues. ■

**ATTENTION**

Foreign Computer Stores/  
Magazine Dealers

You have a large technical audience that speaks English and is in need of the kind of micro-computer information that CW/Peterborough provides.

Provide your audience with the magazine they need and make money at the same time. For details on selling **80 MICRO**, **inCider**, **HOT CoCo**, and **RUN** contact:

**SANDRA JOSEPH**  
**WORLD WIDE MEDIA**  
386 PARK AVE., SOUTH  
NEW YORK, NY 10016  
PHONE (212) 686-1520  
TELEX—620430

Address correspondence to Terry Kepner, P.O. Box 481, Peterborough, NH 03458. Terry Kepner is a free-lance writer and programmer. He also writes monthly columns for 80 Micro and Portable 100 magazines. He has been writing about computers since 1979. Linda Tiernan is a librarian with a master's degree in bio-medical research. She has worked with computers since 1980.

**NEW** **for the TRS-80**  
**color computer**

**Color.80  
PageWriter**

EASY TO USE, LOW COST WORD  
PROCESSING, WITH 80 COLUMN  
TEXT WINDOW. FOR CASSETTE  
BASED 16K COLOR BASIC USER  
CASSETTE ONLY.. \$18.95

**Color.80  
BASI-CALC**mini spreadsheet  
program

NEW LOW COST WAY FOR COCO  
USERS TO JOIN THE 'CALC CLUB  
15 X 10 ROWS/COLUMNS.  
CASSETTE COLOR BASIC  
\$18.95

CHECK/MONEY ORDER + \$2.00 SHIPPING  
N.Y. RES. ADD SALES TAX

**VMC SOFTWARE**

P.O. BOX 326  
CAMBRIA HTS. N.Y. 11411

Circle Reader Service card #30



# Why do more CoCo owners choose 'REAL TALKER'?

*Sure it's priced right, but there's more...*

**Thousands** of 'Real Talker' owners know 'Real Talker' beats ALL other Coco voice synthesizers in ease of use and flexibility. And, NO other Coco talker has a clearer, more intelligible voice. That's quite a lot of advantage when you consider Real Talker's unbeatable price. Yet, Real Talker has some important features that you simply will not find in other Coco talkers:

'Real Talker' is compatible with any 16K, 32K, 64K Extended or non-extended Color Computer. It works with any cassette or disk system and comes complete and ready to talk through your T.V. or monitor speaker. Price includes the 'Real Talker' electronic voice synthesizer in a ROM pack, software on cassette (may be transferred to disk), and user manual.

**'SAY'** command - You'll have your computer talking brilliantly in just minutes thanks to this powerful new command. Type SAY "ANYTHING YOU WANT" and your words are instantly spoken. It's that simple. Think how easy this makes creating speaking Basic programs. Adding speech to your existing programs is a snap too.

**'CONVERT'** - This is a truly powerful command for the basic programmer. CONVERT automatically transforms a machine language dependent speaking program into a stand-alone Basic program. In other words, you can effortlessly write speaking Basic programs that do not require a machine language translator in memory. This is a unique feature of 'Real Talker'. No other voice synthesizer gives you anything even remotely approaching this type of capability - even synthesizers costing considerably more.

Other features include software controlled pitch, unlimited vocabulary text-to-speech, and even a program that will recite any ASCII file (such as from Telewriter-64 & other word processors). You also get Colorware's unique full-screen phoneme editor program that let's you experiment with and modify speech at it's most fundamental level.



*'Real Talker' is a full-featured electronic voice synthesizer unit built into a compact cartridge case. You simply plug it into the side of your computer.*

## NOW INCLUDED WITH 'REAL TALKER'.....

1. **'DR. TALK'**-This interactive "Eliza" type psychoanalyst program will discuss your innermost problems at length.
2. **'TALKING BATTLESHIP'**-It's you vs. the computer in this speaking version of the classic game.
3. **'TALKING BLACKJACK'**- Play for big stakes against a rather talkative casino dealer.


**ONLY  
\$59.95**

- 'REAL TALKER-1'** (for the original Color Computer).....\$59.95  
**'REAL TALKER-2'** (for the Color Computer-2).....\$64.95  
**'Y - BRANCHING CABLE'** For disk systems. If you have a disk system but do not have a Radio Shack Multi-Slot unit, this economical cable will allow to connect and use your Real Talker and Disk system together.....27.95

**CALL TOLL FREE (800) 221-0916**

## TALKHEAD

If you have a 'Real Talker', do not deprive yourself of this absolutely incredible machine-language Talking Head simulation program. While other talking head simulations use a minimal cartoon-like face, TALKHEAD uses high resolution, full-screen, digitized images of an actual person's face to create a life-like animated effect.



## SOFTWARE FOR THE 'REAL TALKER'

TALKHEAD can be easily commanded in Basic to appear on screen and say anything you want. Available on cassette or disk for only \$19.95, TALKHEAD requires 64K and a Colorware 'Real Talker'.

**ONLY \$19.95**

ACTUAL UNRETOUCHED PHOTO



**COLORWARE INC.**  
 78-03B Jamaica Ave.  
 Woodhaven, NY 11421  
 (718) 647-2864



## ★★★ ORDERING INFORMATION ★★★

ADD \$2.00 PER ORDER FOR SHIPPING & HANDLING.  
 C.O.D.'S: ADD \$3.00 EXTRA.  
 SHIPPING & HANDLING FOR CANADA IS \$4.00  
 WE ACCEPT VISA, MASTER CARD, M.O.'S, CHECKS.  
 N.Y. RESIDENTS MUST ADD SALES TAX.




# CoCo Max

*This is one of those rare programs that will captivate everyone in your family.... No one can see CoCo Max and not want to try it!*




We are all witnessing an exciting revolution in microcomputers: a radically new kind of computer and software that opens a whole new world of creative power to computer users.

It was inevitable that this exciting approach would be brought to the CoCo. With this in mind, Colorware chose to go all out and maximize this new concept for the color computer. That meant designing not just software but hardware too. It meant thousands of hours of pure machine language programming. Rarely has this much effort been applied to one product for the Color Computer.

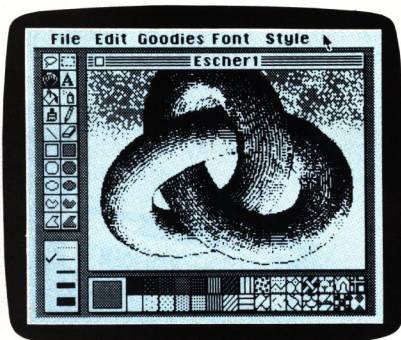

## UNMATCHED CAPABILITY...


Because we took the maximum approach: highly optimized machine code combined with hardware, CoCo Max truly stands above the rest as the ultimate creative tool for the Color Computer. It's unrivaled performance lets you create with more brilliance and more speed than any similar system – much more than you ever imagined possible. And, you can do it in black & white or color.

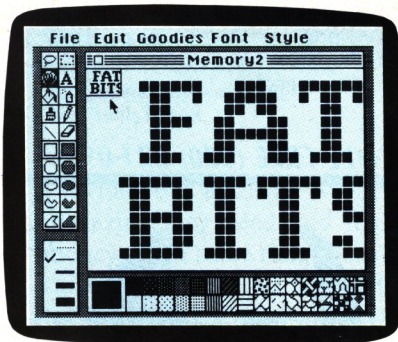

All the sophisticated power of the bigger systems is there: *Icons*, *Pull-Down Menus*, full *Graphic Editing*, *Font Styles*, and all kinds of handy tools and shortcuts.

Plug your joystick, mouse or touch pad into CoCo Max's Hi-Res Input Unit. Then use a delightfully simple *Point-and-Click* method to get any of CoCo Max's powerful graphic tools. It has them all:

You can *Brush*, *Spray* or *Fill* with any *Color*, *Shading* or *Pattern*. Use *Rubber Band Lines* and *Shapes* (square, rectangle, circle, ellipse, etc.) to create perfect illustrations with speed and ease. There's a *Pencil*, an *Eraser* and even a selection of *Calligraphy Brushes*. And, as you can see, CoCo Max can do a lot with text. All of the newest special effects are there: *Trace Edges*, *Flip*, *Invert*, *Brush Mirrors*, etc. And all of the very latest super-capabilities like: *Undo*, which automatically reverses your mistakes, and *Fat Bits* which zooms you way in on any part of your subject to allow dot-for-dot precision.

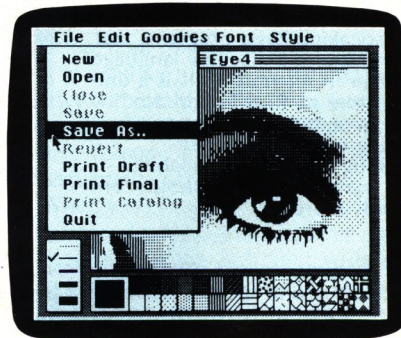

## THE BIG PICTURE

The large image box in the middle of the CoCo Max screen is actually only a window on an even larger image. Use the *Point-and-Click* "Hand" to effortlessly move your window over any portion of the larger image. You have a working area of up to 3-1/2 times the area of the window itself.


## FLEXIBLE PRINTING...

CoCo Max gives you many ways to print. Fill a whole page with your image or condense two full CoCo screens to less than 1/4 page for a finely detailed copy. "Dump" your CoCo Max screen full size or shrink it to 1/8 page size.




## FREEDOM TO CREATE...

Anyone who wants to create anything at all on their CoCo screen or printer will certainly be very glad to meet CoCo Max. CoCo Max's friendly yet sophisticated graphic and text capabilities let you almost instantly produce illustrations, diagrams, charts,

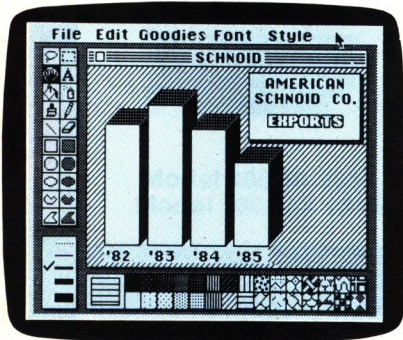


graphs, and computer art – for serious use or just for creative fun.

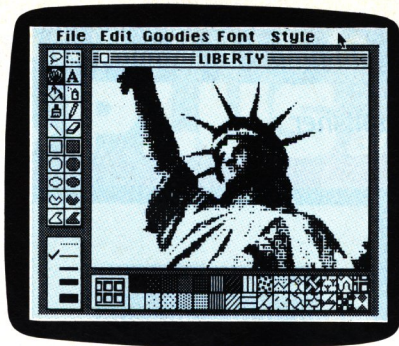

tion by using software schemes such as sliding windows. Although clever, these schemes yield sluggish and awkward results. Only CoCo Max does it the right way. The CoCo Max Hi-Res Input Unit plugs into your ROM slot and adds an entirely new joystick input to your computer – a precision one with a 49,152 point resolution to match the CoCo screen exactly.

Plug your same joystick, mouse or touch

You may then use CoCo Max's graphic magic on it. The DS-69 is available as an option from Colorware from \$149.95 complete with its own software on disk or tape. Using the DS-69 with a disk requires an RS multi-pak adaptor.

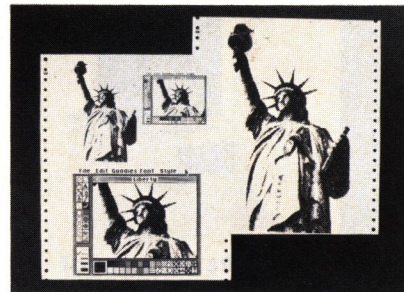

## COCO MAX REQUIREMENTS

The CoCo Max System includes the Hi-Res Input Unit, software on disk or cassette (please specify) and user manual. It will work on any 64K Extended or non-

# THE COCO MAX SYSTEM

## AN ABSOLUTE GUARANTEE

CoCo Max is a hardware software system that no software-only system can match. Get CoCo Max and see your CoCo perform as it never could before. If you don't agree that CoCo Max is the ultimate creative tool for the Color Computer, simply return it within 20 days for a full, courteous refund from Colorware.

## THE HARDWARE...

This is the key to CoCo Max's unmatched performance. Did you know the normal joystick input built into the Color Computer only allows access to 4,096 (64 x 64) points on the CoCo screen? Yet, the Color Computer's high resolution screen

pad into this new input and you have a whole new kind of control. The difference is remarkable.




## A DIGITIZER OPTION...

We studied all the video digitizers available and picked the best of them to link with CoCo Max. The DS-69 from Micro Works was our choice. This optional device lets you capture the image from any video source (video recorder, camera, etc.) on your Color Computer.



has 49,152 (256 x 192) pixels. This means that a joystick, mouse or even a touch pad can, at best, only access about one tenth of the pixels on the CoCo screen.

Most graphic programs ignore this hardware limitation of the Color Computer and give you only low-res control. Others attempt to overcome the limita-

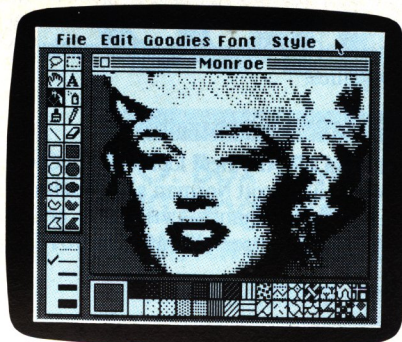

extended Color Computer. You'll need a Radio Shack or equivalent joystick, mouse or touch pad. Disk systems require a Multi-Slot Interface or Y-Branching Cable.

**THE COMPLETE COCO MAX SYSTEM,**  
with software on **DISK**.....\$69.95


with software on **CASSETTE** (Available  
Mar '85).....\$69.95

**Y-BRANCHING CABLE**-If you have a disk system but do not have a Multi-Slot Interface, use this economical 40-pin, 1 male, 2 female cable to connect the CoCo Max Hi-Res input unit and your disk controller to your CoCo.....\$27.95



**TOLL FREE ORDER LINE:**  
**(800) 221-0916**

**Colorware Inc.**  
**78-03B Jamaica Ave.**  
**Woodhaven, NY 11421**  
**(718) 647-2864**



## ORDERING INFORMATION

ADD \$3.00 PER ORDER FOR SHIPPING AND HANDLING.  
C.O.D.'S ADD \$3.00 EXTRA.  
SHIPPING AND HANDLING FOR CANADA IS \$5.00  
WE ACCEPT VISA, MASTER CARD, M.O.'S, CHECKS.  
N.Y. RESIDENTS MUST ADD SALES TAX.



# The Corner Office

by Jeff DeTray, Publisher

## All About You

**W**e're constantly surveying you, the *HOT CoCo* reader, to find out what you think of our magazine. Your opinions on content, readability, and appearance are important. At the same time, we've gathered considerable information concerning the hardware you own and your favorite applications. In the process, we've also learned a great deal about you as people. This month, I'd like to share some of our findings with you.

### The "Average Reader"

*HOT CoCo* readers are anything but average, if that word is taken to mean unexceptional or mediocre. Perhaps the term I want is "composite". We can create a composite sketch of a typical *HOT CoCo* reader by combining the various bits of demographic information we have collected. Let's take a close look at this nonexistent Composite CoCo Fan, (or CCF for short). While it's highly unlikely that you fit the CCF profile exactly, it can still be fun to discover where you do and don't match the averages.

How old are you? Our CCF is 32 years old, but remember, that's only an average. The actual spread of ages is quite wide, from grade school students to retirees. While 39 percent of our readers are over the age of 35, the under-25 crowd hangs right in there with 31 percent. I'm starting to feel old. In summary:

25 and under	31%
26-35	30%
over 35	39%

The effects of such a broad range of ages can be seen in the two most popular occupations of *HOT CoCo* readers. The CCF is either a student or is pursuing a technical or engineering career. General business and government jobs are also high on the list. More than 75 percent of you fall into one of these four occupational categories. Even so, occupations still run the gamut, from farmers to factory workers to doctors to sales reps. People of all sorts are using Color Computers. Nobody mentioned publishing—does that mean I don't match the profile?

The CCF is a college man. A whopping 56 percent of you have attended college. That's especially impressive considering the many readers still in grade school and high school. All that education must be doing some good, as the income of the average *HOT CoCo* household stands at \$32,400!

### The "Average" Color Computer

This is a tough one to pin down, because it's changing so rapidly. What's exceptional today will be the norm tomorrow. For instance, as Mike points out in this month's Digressions, 64K is rapidly giving way to 128K as the standard memory capacity for home computers. Indeed, almost 70 percent of you already own 64K Color Computers, so there's no place to go but upwards to 128K. The 16K crowd still comprises a healthy 23 percent of our readers, so rest assured there will still be plenty of 16K goodies in *HOT CoCo*. Extended Basic or Disk Basic can now be found in more than 90 percent of your machines.

Disk drive ownership is rapidly approaching 50 percent, and many of you without disks have plans to purchase one. Printers are even more popular—over 60 percent of you own at least one. Most of you without a printer have plans to acquire one by year's end. Modems are growing fast in popularity, as interest grows in communicating with electronic information services and computer bulletin boards. Look for modem usage among Color Computer owners to double this year.

What's the most popular CoCo peripheral of all? No contest. It's joysticks, by a wide margin, with an 85 percent ownership. And you say you never play games!

### 'Til Next Month

Let me hear from you, okay? How do you like the new look of *HOT CoCo*? What about the pull-out program listings in the center of the magazine? Do you like Scott Norman's new column, The Computer Room? Or Assembly 101 by the Perottis, father and son? Don't sit on your hands—write to us, or drop a note on CompuServe 70310,676.

Have a good month, and don't forget to tell advertisers, "I saw it in *HOT CoCo*!" ■



From Computer Plus to YOU ...  
**PLUS** after **PLUS** after **PLUS**



Model 100 8K \$339  
 Model 100 24K \$510




Color Computer II  
 w/16K Ext. Basic \$135  
 w/64K Ext. Basic \$179




Tandy 1000 \$999  
 Tandy 1200 \$2595



DMP120 \$385



Color Computer Disk Drive  
 Drive 0 \$289 Drive 1 \$220



DWP210 \$489  
 DWP510 \$1295

**BIG SAVINGS ON A FULL COMPLEMENT OF RADIO SHACK COMPUTER PRODUCTS**

**COMPUTERS**

Model 4 Portable	970
Model 4	970
Model 1000	999
Model 1200	2595
Model 2000 2 Drive	2299

**MODEMS**

Hayes Smartmodem II	215
Radio Shack AC-3	125
Radio Shack DC Modem I	89
Radio Shack DC Modem II	160
Radio Shack DC Modem 2212	315

**PRINTERS**

Radio Shack TRP100	229
Radio Shack DMP105	160
Radio Shack DMP110	305
Radio Shack DMP430	660
Radio Shack CGP220 Ink Jet	545
Silver Reed EXP500 D.W.	430
Star Gemini 10X	289
Star Gemini Powertype	345
Panasonic P1091	315
C. Itoh Prowriter 8510	320
Okidata and Epson	CALL

**ETC.**

Radio Shack Drive Controller	119
Radio Shack Ext. Basic Kit	39.95
PBH Ser/Par Conv.	69
64K Upgrade Kit	49
Radio Shack Deluxe Keyboard	35.95
HJL Keyboard	79.95
Radio Shack CCR-81 Recorder	52
Radio Shack Del. Joystick (each)	35.95
Radio Shack Joysticks (pair)	22
Video Plus (monitor adapter)	24.95
Video Plus IIC	39.95
Amdek Color 300	265
Amdek Video 300 Green	145
Amdek Video 300 Amber	159
Taxan Color 220 Monitor	245
Taxan 115 Green	125
Taxan 116 Amber	129
Radio Shack VM-2	139

**SOFTWARE**

	(Tape Version)
The Sailor Man	29.95
The King	26.95
Buzzard Bait	27.95
Worlds of Flight	29.95

Colorpede	29.95
Juniors Revenge	28.95
Pac Attack	24.95
Block Head	26.95
Lunar Rover Patrol	24.95
Lancer	24.95
Typing Tutor	23.95
Galagon	24.95
Scott Adams Adventures	19.95
Sea Dragon	34.95
Colorcome	49.95
Telewriter 64	49.95
Deft Pascal (disk)	79.95
Elite-Calc	59.95
VIP Writer (tape & disk)	69.95
VIP Calc (tape & disk)	69.95
VIP Terminal (tape & disk)	49.95
VIP Database (disk)	59.95
VIP Integrated Library (disk)	149.95
Graphicom (disk)	29.95

Order any 2 software pieces listed and take 10% off their listed price. All Radio Shack software 10% off list. Send for complete list.

**CALL TOLL FREE  
 1-800-343-8124**

- LOWEST POSSIBLE PRICES
- BEST POSSIBLE WARRANTY
- KNOWLEDGEABLE SALES STAFF
- TIMELY DELIVERY
- SHOPPING CONVENIENCE



Circle Reader Service card #18

**computer  
 plus**  
 P.O. Box 1094  
 480 King Street  
 Littleton, MA 01460  
 SINCE 1973

IN MASSACHUSETTS CALL (617) 486-3193



# The HJL-57 Keyboard

Now available for all models,  
including CoCo 2.



## Compare it with the rest. Then, buy the best.

If you've been thinking about spending good money on a new keyboard for your Color Computer, why not get a good keyboard for your money?

Designed from scratch, the HJL-57 Professional Keyboard is built to unlock ALL the potential performance of your Color Computer. Now, you can do real word processing and sail through lengthy listings...with maximum speed; minimum errors.

At \$79.95, the HJL-57 is reasonably priced, but you can find other CoCo keyboards for a few dollars less. So, before you buy, we suggest that you compare.

### Compare Design.

The ergonomically-superior HJL-57 has sculptured, low profile keycaps; and the three-color layout is identical to the original CoCo keyboard.

### Compare Construction.

The HJL-57 has a rigidized aluminum baseplate for solid, no-flex mounting. Switch contacts are rated for 100 million cycles minimum, and covered by a spill-proof membrane.

### Compare Performance.

Offering more than full-travel, bounce-proof keyswitches, the HJL-57 has RFI/EMI shielding that eliminates irritating noise on displays; and four user-definable function keys (one latchable), specially-positioned to avoid inadvertent actuation.

### Free Function Key Program

Your HJL-57 kit includes usage instructions and decimal codes produced by the function keys, plus a free sample program that defines the function keys as follows: F1 = Screen dump to printer. F2 = Repeat key (latching). F3 = Lower case upper case flip (if you have lower case capability). F4 = Control key; subtracts 64 from the ASCII value of any key pressed. Runs on disc or tape; extended or standard Basic.

### Compare Installation.

Carefully engineered for easy installation, the HJL-57 requires no soldering, drilling or gluing. Simply plug it in and drop it right on the original CoCo mounting posts. Kit includes a

new bezel for a totally finished conversion.

### Compare Warranties.

The HJL-57 is built so well, it carries a full, one-year warranty. And, it is sold with an exclusive 15-day money-back guarantee.

### Compare Value.

You know that a bargain is a bargain only so long as it lasts. If you shop carefully, we think you will agree...The HJL-57 is the last keyboard your CoCo will ever need. And that's **real** value.

### Order Today.

Only \$79.95, the HJL-57 is available for immediate shipment for either the original Color Computer (sold prior to October, 1982) or the F-version and TDP-100 (introduced in October, 1982), and the new 64K CoCo. **Now also available for CoCo 2.**

**Call Toll Free**  
**1-800-828-6968**

In New York 1-800-462-4891



Div. of Touchstone Technology Inc.  
955 Buffalo Road • P.O. Box 24954  
Rochester, New York 14624  
Telephone: (716) 235-8358

Ordering Information: Specify model (Original, F-version, or CoCo 2). Payment by C.O.D., check, MasterCard or Visa. Credit card customers include complete card number and expiration date. Add \$2.00 for shipping (\$3.50 for Canada). New York state residents add 7% sales tax. Dealer inquiries invited.